

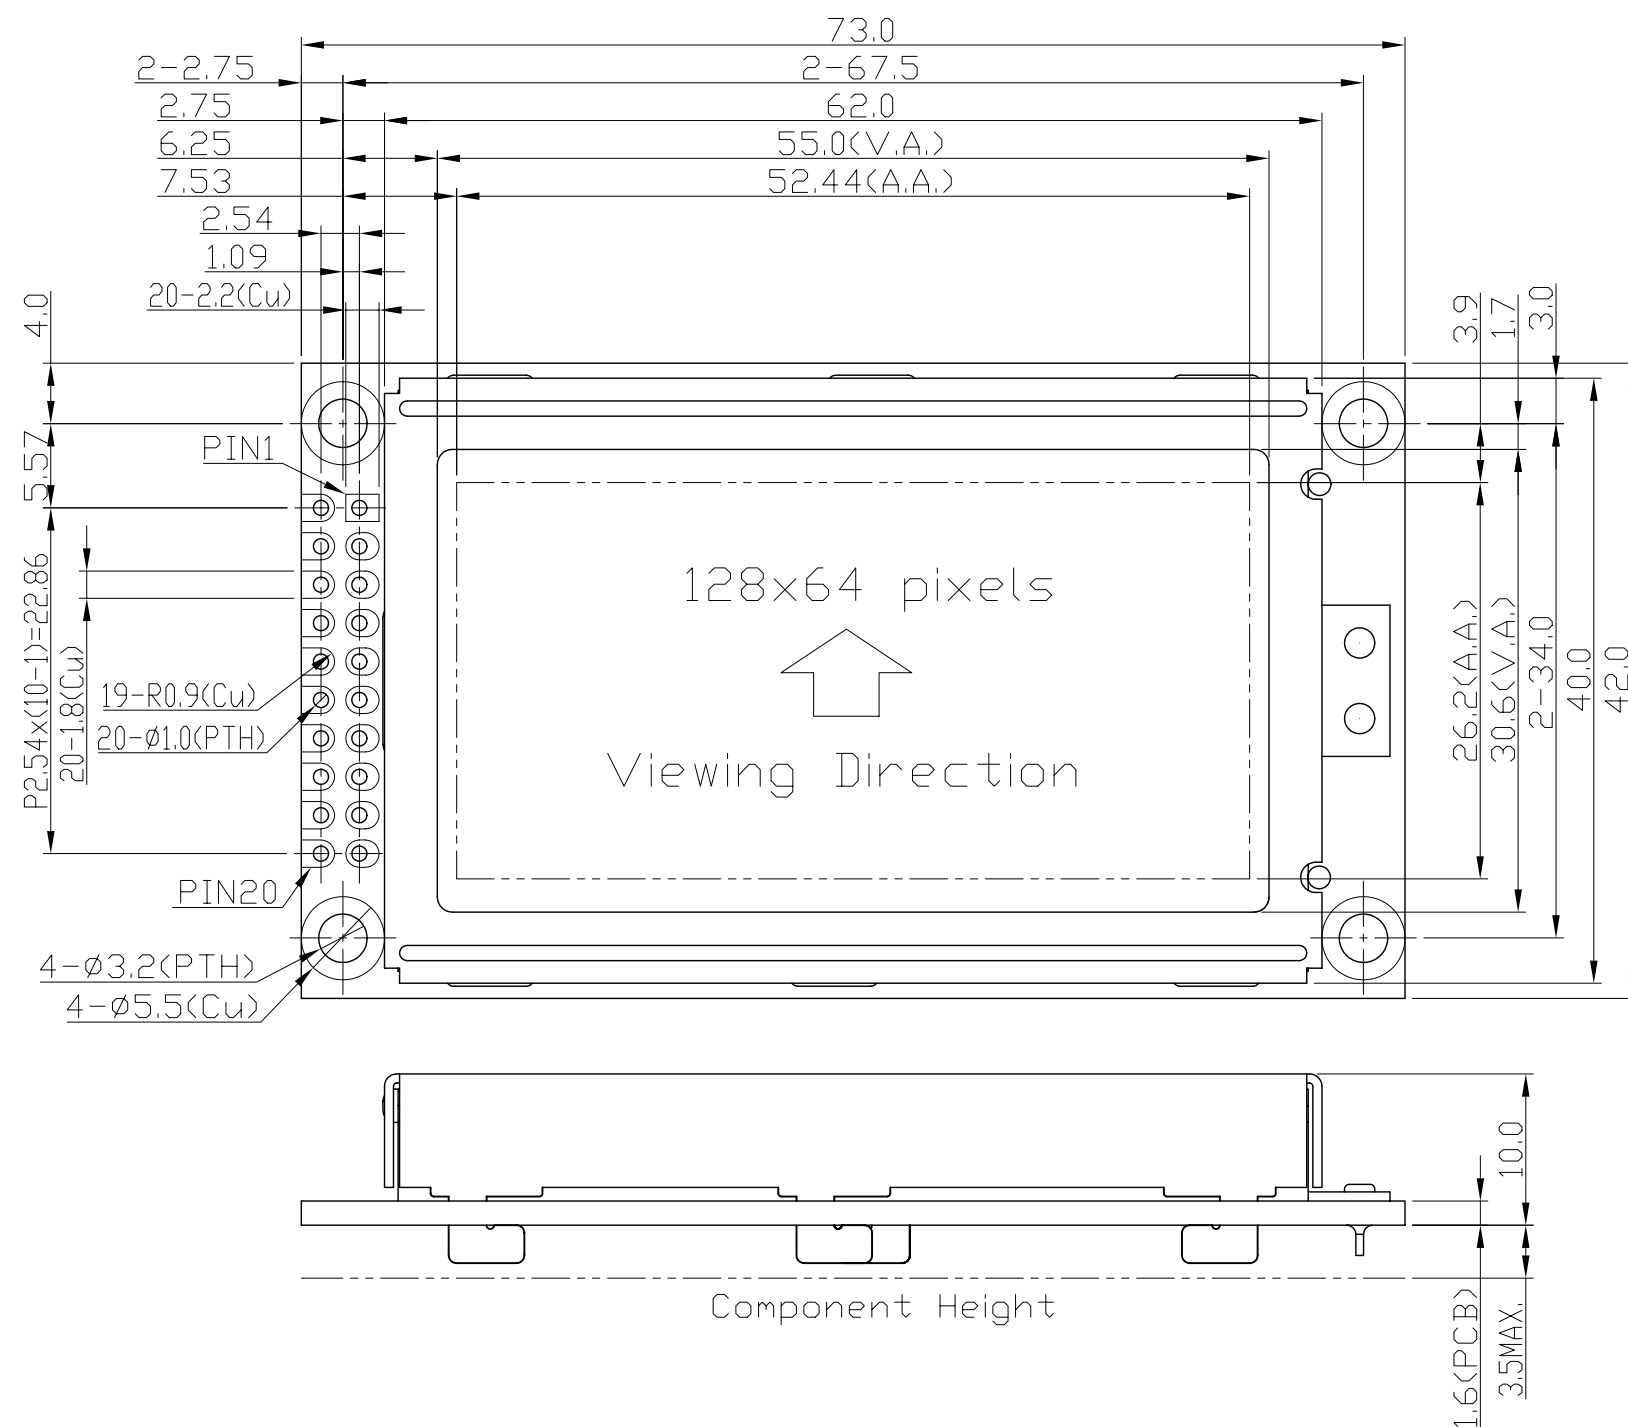


Pixels Details
Scale=20/1

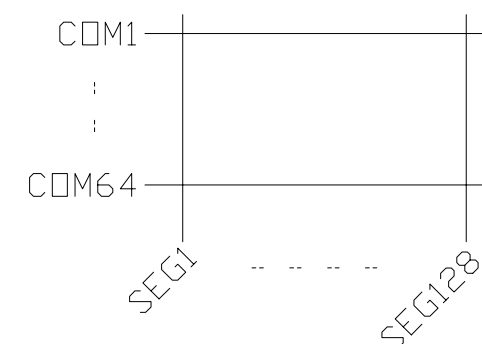

Panel Wiring Details
Scale=free

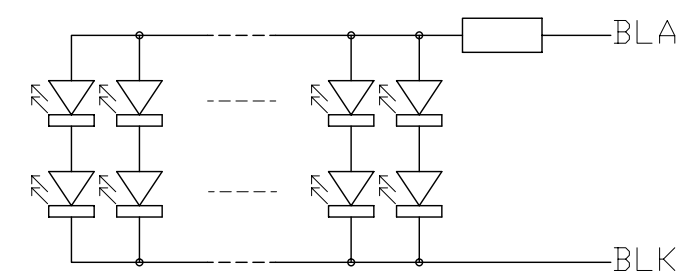

Backlight Circuit
(No. of LEDs = 2x18pcs)
Scale=free

No.	Pin Name
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	/RST
18	VOUT
19	BLA
20	BLK

(*8)

Note:

- *1. LCD Display Type : STN-YG, Positive, Transflective
- *2. Viewing Direction : 6H
- *3. Duty : 1/64
- *4. Operating Voltage : 5V
- *5. Backlight Color : YG
- *6. Operating Temperature : -20°C ~ 70°C
- *7. Storage Temperature : -30°C ~ 80°C
- *8. A VR(25k to 50k) must be connected externaly for contrast control

C		
B		
A		
Rev	Note	Date
Dwg Title	LM12864MBC-1 Outline Dwg	
Dwg No.	MK-001079-1-1	Date 2005-10-11
Scale 2/1	Tol. ±0.5	Unit mm
Approved	Checked	Paper Size A3
		Drawn Li Shuai
TOPWAY		