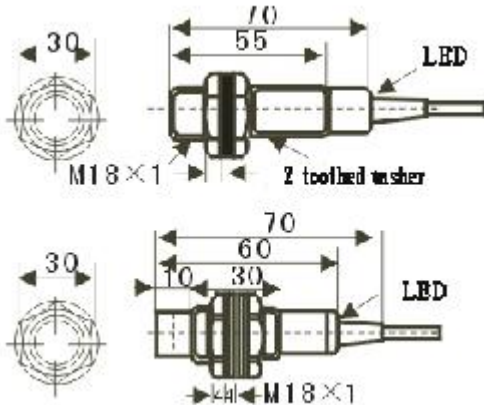


INDUCTIVE PROXIMITY SWITCH

INDUCTIVE PROXIMITY SWITCH					
Outward appearance code			LM18		
Appearance					
Dimension					
Flush	Detection distance			5mm	
	DC 6 ~ 36 V	NPN	NO	3005NA	
			NC	3005NB	
			NO+NC	3005NC	
		PNP	NO	3005PA	
			NC	3005PB	
			NO+NC	3005PC	
		two wire system	NO	3005LA	
			NC	3005LB	
	AC 90 ~ 250 V	SRC Control label silicon	NO	2005A	
			NC	2005B	
			NO+NC	2005C	
		Relay output			
Fl	Detection distance			8mm	

	DC 6 ~ 36 V	NPN	NO	3008NA
			NC	3008NB
			NO+NC	3008NC
		PNP	NO	3008PA
			NC	3008PB
			NO+NC	3008PC
		two wire system	NO	3008LA
			NC	3008LB
	AC 90 ~250 V	SRC Control label silicon	NO	2008A
			NC	2008B
			NO+NC	2008C
		Relay output		
Control output		DC		200mA
		SCR/Relay		300mA
Output voltage dropDC/AC				DC<3V AC<10V
Consumption current				DC<15mA AC<10mA
Standard detected object				18×18×1 (A3 iron)
Repeated precision				0.02
DC/AC Response frequency				200Hz/25Hz
Working environment temperature				- 25℃~75℃
Insulation resistance				50MΩ
Shell material				Metal
Protection grade				IEC standard IP67
Alternative model at home and abroad				LJ18A3-18-□□