
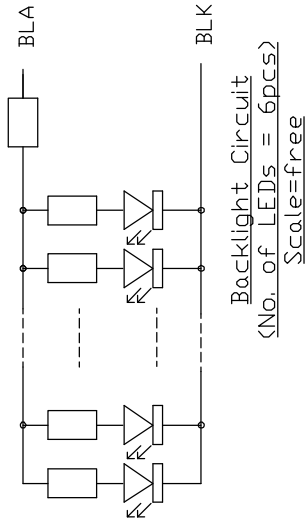
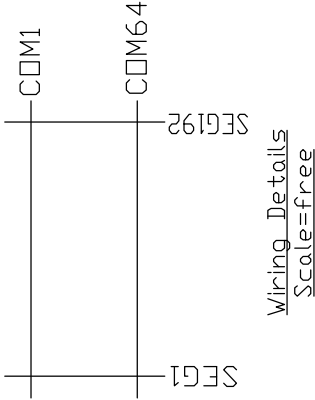
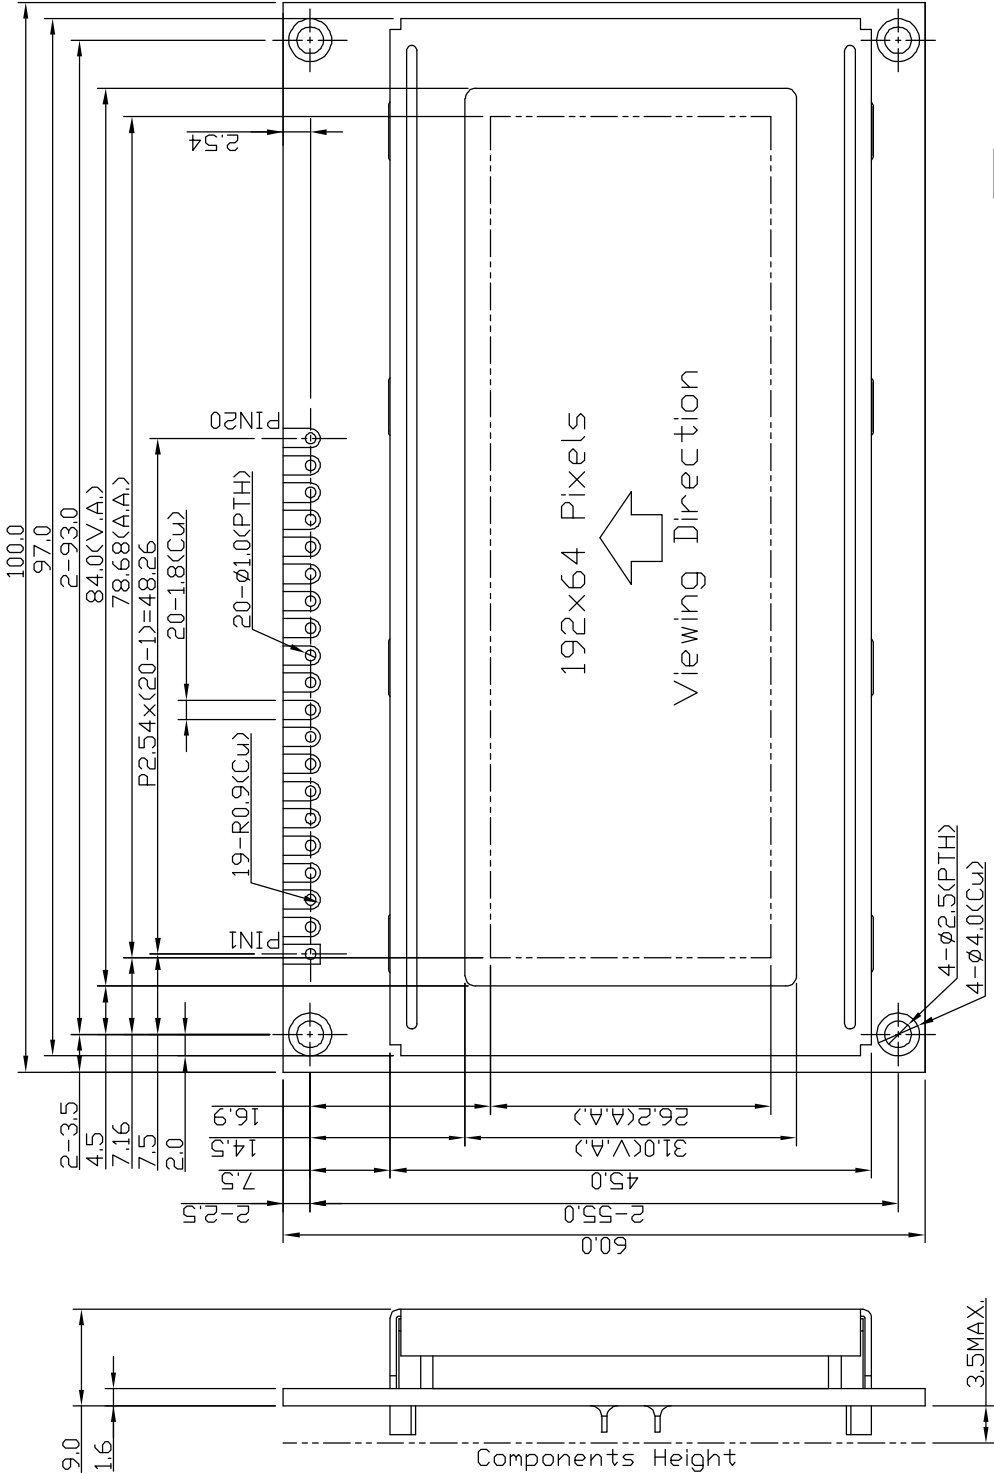


Terminal	
No.	Pin Name
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	RS
12	V0
13	VDD
14	VSS
15	CSA
16	CSB
17	VOOUT
18	RSTB
19	BLA
20	BLK



- NOTE:
- *1. LCD Display Type : STN, Negative, Transmissive
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/64, Bias : 1/9
 - *4. Operating Voltage : 5.0V
 - *5. Backlight Color : White
 - *6. Backlight Supply : 102mA (5.0V TYP.)
 - *7. Operating Temperature : -20°C~70°C
 - *8. Storage Temperature : -30°C~80°C
 - *9. An external VR(25K to 50K) must be connected for Contrast Control.
 - *10. Environmental Safe Standard : RoHS

C					
B					
A					
Rev/Note	LM19264AFW	Outline	Dwg	Date	
Dwg No.	MK-001931-1-1			2007-08-24	
Scale	2/1	Unit	mm	Page Size	A3
Approved		Checked		Drawn	Zhou Huifang

TOPWAY