

# SUN™

## LP60-375 PTC RESETTABLE OVERCURRENT PROTECTOR

### APPLICATION:

Almost anywhere there is a low voltage power supply and a load to be protected including:

- DC MOTOR DRIVE CIRCUIT
- COMPUTERS & PERIPHERALS
- GENERAL ELECTRONICS EQUIPMENT
- AUTOMOTIVE APPLICATION

### ELECTRICAL CHARACTERISTICS:

I<sub>max</sub>..... 40A

V<sub>max</sub> ..... 60VOLTS

I<sub>hold</sub>..... 3.75A max @ 23

I<sub>trip</sub> ..... 7.5A min @ 23

### RESISTANCE

R<sub>initial</sub>..... 0.03 OHM MIN  
0.05 OHM MAX

Time to trip ..... 24.0SEC

P<sub>D</sub> ..... 3.2W

### NOTE:

### Measured Values

I<sub>H</sub> – Hold current Maximum current device will pass without interruption in 23° still air.

I<sub>T</sub> – Trip current Min. current which will switch the device from low to high resistance in 23° still air.


I<sub>max</sub> Maximum fault current the device can withstand without damage at rated voltage.

V<sub>max</sub> Maximum voltage the device can withstand without damage at rated current.

P<sub>D</sub> Power dissipated from the device when in the tripped state in 23° still air.

Initial Resistance Device resistance as received from the factory.

### PRODUCT DIMENSIONS PACKAGE: 1

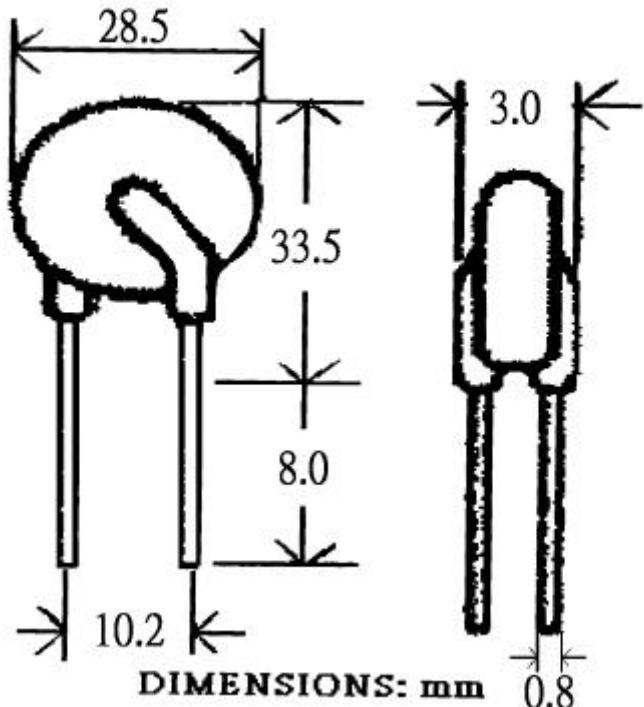

\* DIRECT REPLACE: BOURNS MF-R375  
: RAYCHEM RXE375

**MOBICON GROUP**