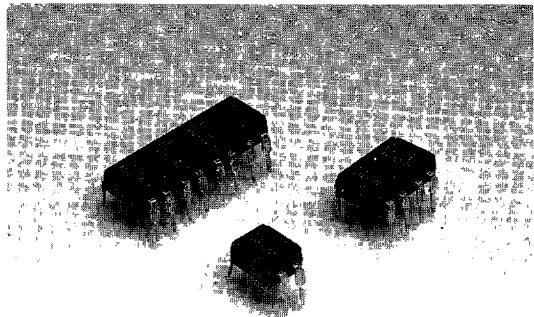


LITEON**High Density Mounting Type
Photocoupler****LTV817/LTV827/LTV847**



T-41-83

■ FEATURES

1. Current transfer ratio
CTR: MIN. 50% at $I_F = 5\text{mA}$, $V_{CE} = 5\text{V}$
2. High input-output isolation voltage
(V_{ISO} : 5,000 Vrms)
3. Compact dual-in-line package
LTV817: 1-channel type, LTV827: 2-channel type
LTV847: 4-channel type
4. UL approved (No. E 113898(s))

**■ APPLICATIONS**

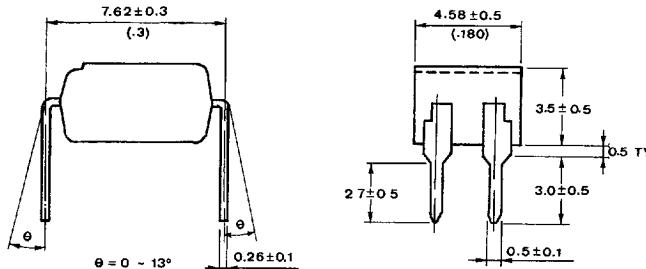
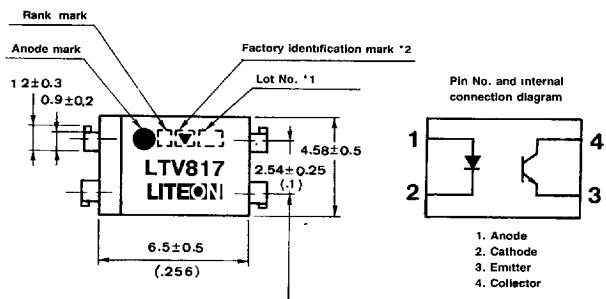
1. Computer terminals
2. System appliances, measuring instruments
3. Registers, copiers, automatic vending machines
4. Electric home appliances such as fan heaters, etc.
5. Medical instruments, physical and chemical equipments.
6. Signal transmission between circuits of different potentials and impedances

■ OUTLINE DIMENSIONS (UNIT: mm)



*1 2-digit number marked according to DIN standard

*2 Two versions available, one with factory identification mark and the other without

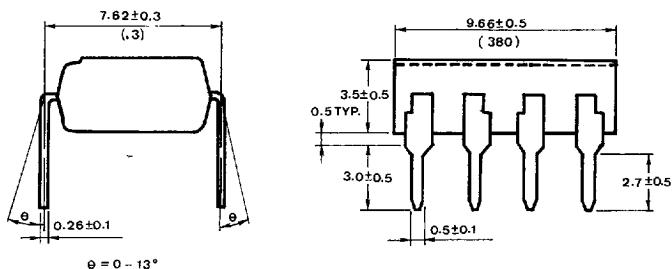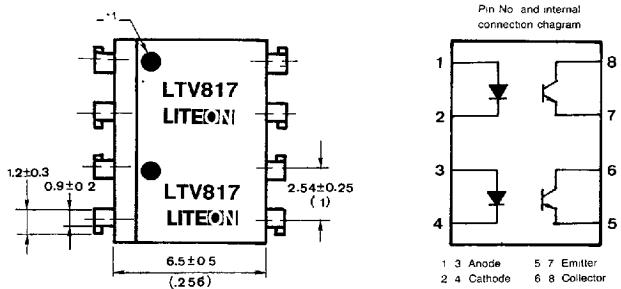T-41-83



Note: *1 Anode mark

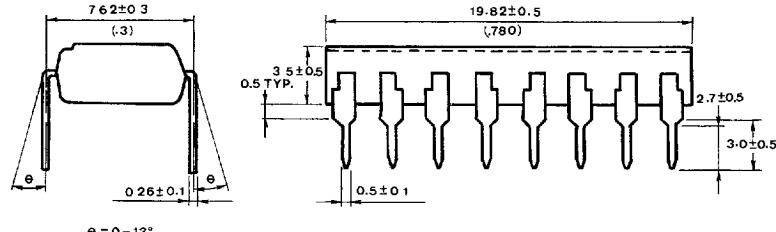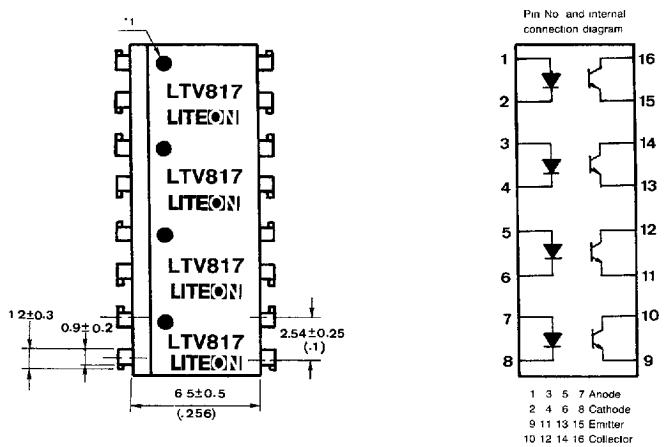

Note: *1 Anode mark

T-41-83

■ RATINGS AND CHARACTERISTICS**• Absolute maximum ratings**

(Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	*1 Peak forward current	I _{FM}	1	A
	Reverse voltage	V _R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	50	mA
	Collector power dissipation	P _C	150	mW
Total power dissipation		P _{tot}	200	mW
Operating temperature		T _{opr}	-30 ~ +100	°C
Storage temperature		T _{stg}	-55 ~ +125	°C
*2 Isolation voltage		V _{Iso}	5	kVrms
*3 Soldering temperature		T _{sol}	260	°C

*1 Pulse width $\leq 100\mu s$, Duty ratio: 0.001

*2 AC for 1 minute, 40 ~ 60% R.H.

*3 For 10 seconds

T-41-83

• Electro-optical characteristics

(Ta = 25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input	Forward voltage	V _F	—	1.2	1.4	V	I _F = 20mA
	Peak forward voltage	V _{FM}	—	—	3.0	V	I _{FM} = 0.5A
	Reverse current	I _R	—	—	10	μA	V _R = 4V
	Terminal capacitance	C _t	—	30	250	pF	V = 0, f = 1kHz
Output	Collector dark current	I _{CEO}	—	—	100	nA	V _{CE} = 20V, I _F = 0, R _{BE} = ∞
	Collector-emitter breakdown voltage	BV _{CEO}	35	—	—	V	I _C = 0.1mA, I _F = 0
	Emitter-collector breakdown voltage	BV _{ECO}	6	—	—	V	I _E = 10μA, I _F = 0
Transfer characteristics	* Collector current	I _C	2.5	—	30	mA	I _F = 5mA, V _{CE} = 5V
	Collector-emitter saturation voltage	V _{CE} (sat)	—	0.1	0.2	V	I _F = 20mA, I _C = 1mA
	Isolation resistance	R _{ISO}	5 × 10 ¹⁰	10 ¹¹	—	Ω	500V DC, 40 ~ 60% R.H.
	Floating capacitance	C _f	—	0.6	1.0	pF	V = 0, f = 1 MHz
	Cut-off frequency	f _C	—	80	—	kHz	V _{CE} = 5V, I _C = 2mA R _L = 100Ω, -3dB
	Response time (Rise)	t _r	—	4	18	μs	V _{CE} = 2V, I _C = 2mA, R _L = 100Ω
	Response time (Fall)	t _f	—	3	18	μs	

$$*CTR = \frac{I_C}{I_F} \times 100\%$$

T-41-83

■ SUPPLEMENT

• Isolation voltage shall be measured in the following method.

- (1) Anode and cathode on input side, collector and emitter on output side shall be shortened individually.
- (2) The isolation voltage tester with a zero-cross circuit shall be used.
- (3) The waveform of applied voltage shall be a sine wave.
(It is recommended that the isolation voltage shall be measured in insulation oil.)

• Rank table of collector current I_C (for LTV 817 only)

Model No.	Rank mark	I_C (mA)
LTV817A	A	4.0~8.0
LTV817B	B	6.5~13
LTV817C	C	10~20
LTV817D	D	15~30
LTV817	A, B, C, D or No mark	2.5~30

Conditions	$I_F = 5\text{mA}$ $V_{CE} = 5\text{V}$ $T_a = 25^\circ\text{C}$
------------	--







• Inspection standard

Outgoing inspection standard for LITON products are shown below.







- (1) A single sampling plan, normal inspection level II based on MIL-STD-105D is applied. The AQL according to the inspection items are shown below.

Defect	Inspection item	AQL (%)	Judgement criterion
Major defect	<ul style="list-style-type: none"> Electrical characteristics Unreadable marking Open, short 	0.25	Depend on the specification
Minor defect	<ul style="list-style-type: none"> Appearance Dimension 	0.4	

T-41-83

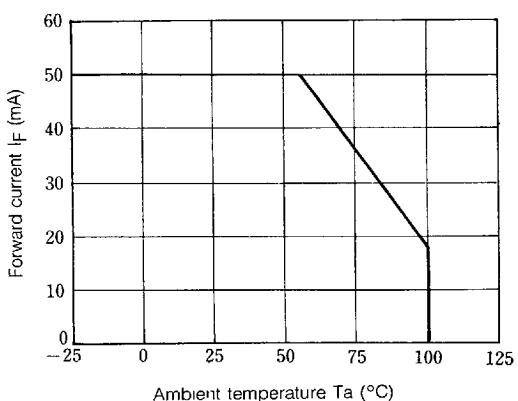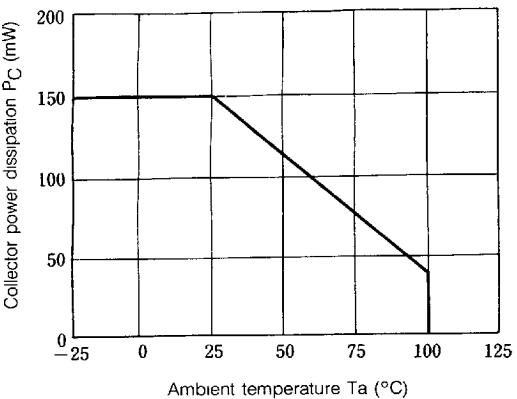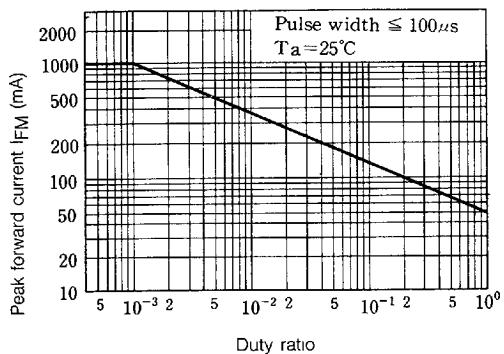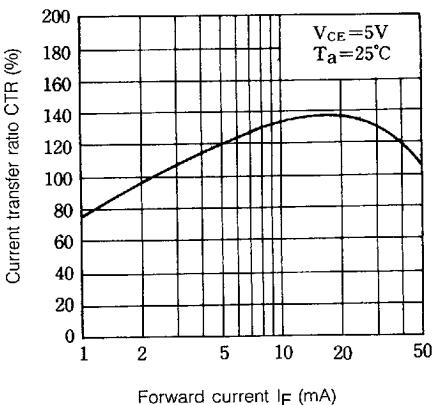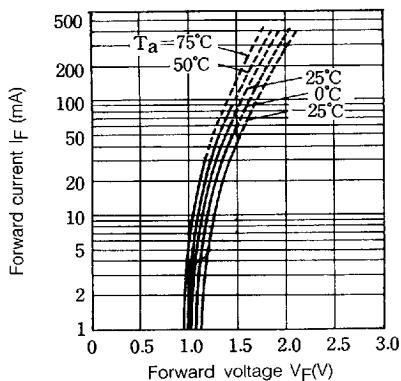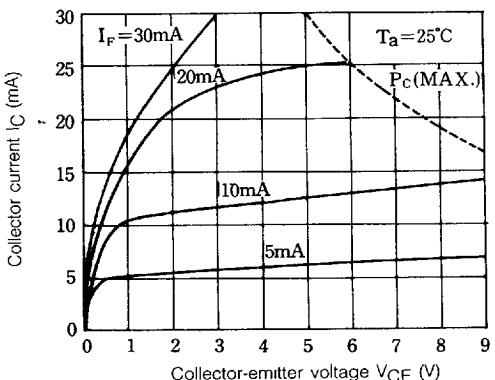
Fig. 1 Forward Current vs. Ambient Temperature**Fig. 2** Collector Power Dissipation vs. Ambient Temperature**Fig. 3** Peak Forward Current vs. Duty Ratio**Fig. 4** Current Transfer Ratio vs. Forward Current**Fig. 5.** Forward Current vs. Forward Voltage**Fig. 6** Collector Current vs. Collector-emitter Voltae

T-41-83

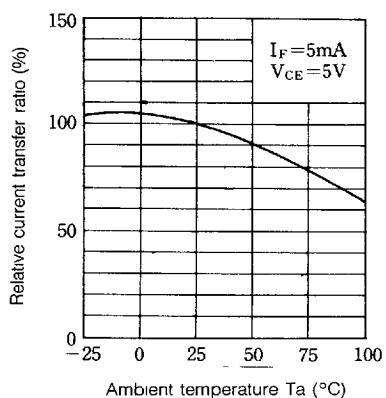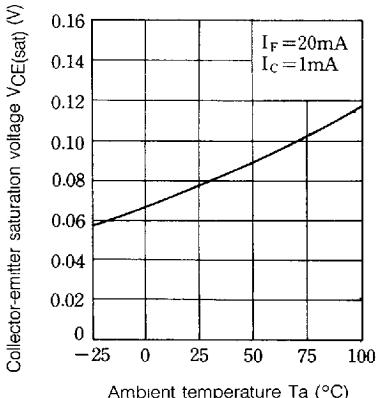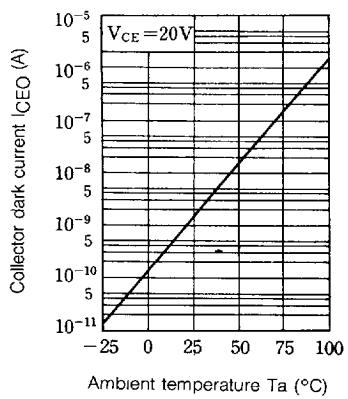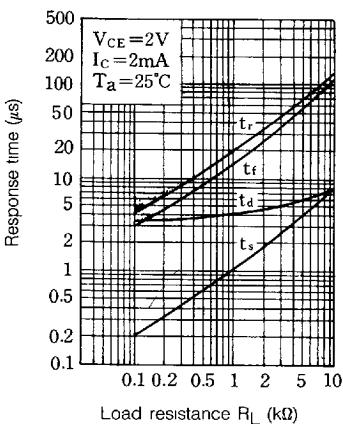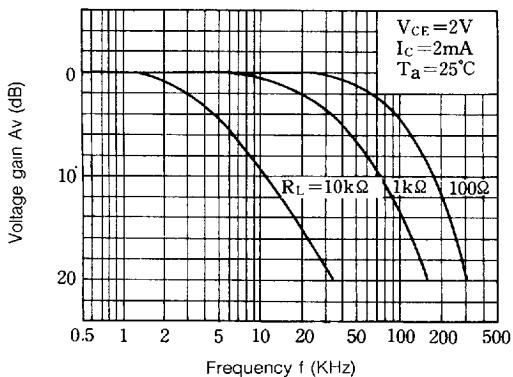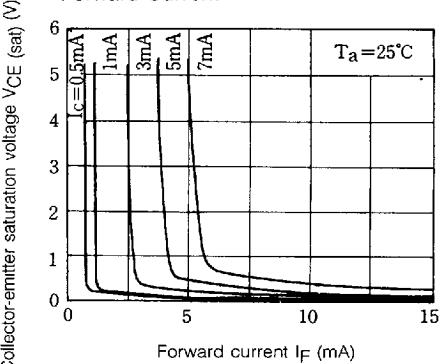
Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature**Fig. 8** Collector-emitter Saturation Voltage vs. Ambient Temperature**Fig. 9** Collector Dark Current vs. Ambient Temperature**Fig. 10** Response Time vs. Load Resistance**Fig. 11** Frequency Response**Fig. 12** Collector-emitter Saturation Voltage vs. Forward Current

T-41-83

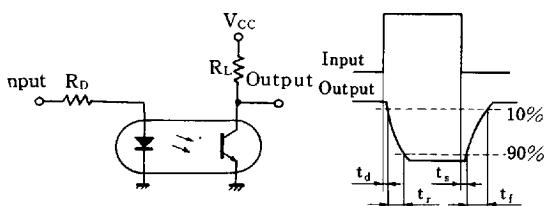Test Circuit for Response Time



Test Circuit for Frequency Response

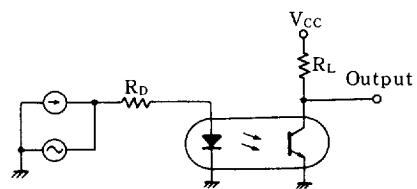

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.