


MIECTM

MPT168

Plezo ceramic transducer (Self Drive)

SPECIFICATIONS

Type	MPT168	Units
Rated voltage	9	V _{DC}
Operating volatage	4.5 ~ 18	V _{DC}
Rated current at 12V _{DC}	< 15	mA
Sound output at 1m	> 85	dBA
Resonant frequency	3400 ± 500	Hz
Operating temp.	-20 ~ +80	℃
Storage temp.	-30 ~ +85	℃
Weight	11	g

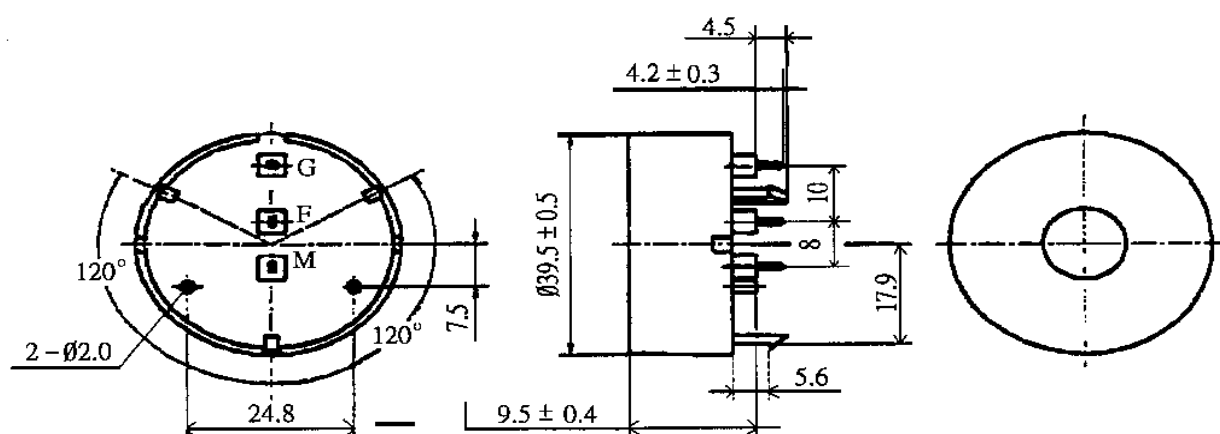

Dimension

Unit: mm

Tolerance:

MOBICON
Electronic Components