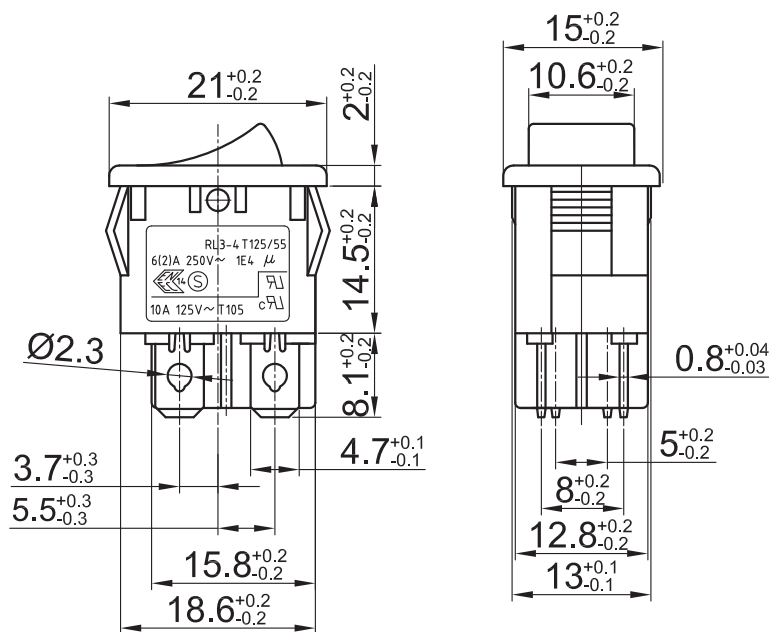


MATERIALS


1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: NYLON #66 UL 94V-2
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: $\text{AgSnO}_2\text{In}_2\text{O}_3(10)/\text{Cu}$


SPECIFICATION

1. RATING: UL C-UL:10A 125VAC
ENEC SEMKO:
6(2)A 250VAC T125/55 1E4
2. CIRCUIT: ON-OFF DPST 4P
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION FORCE: 500~1200gf
8. OPERATION TEMPERATURE RANGE: $-25^{\circ}\text{C} \sim +125^{\circ}\text{C}$

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	19.2
1.25-2.0	19.4
2.0-3.0	19.6

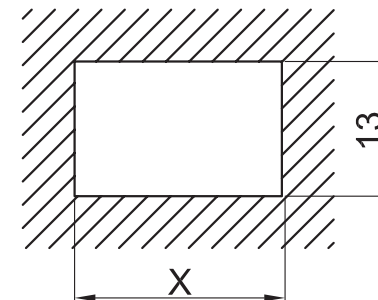

 興瀚企業股份有限公司 Salecom. Electronics Co., Ltd.						MR-21-A-Q-B/B-3*	
设计	签名	年月日	标准化	签名	年月日	ROCKER SWITCH	SERIES RL3-4
绘图	符辉	15.12.25					FUNCTION ON-OFF
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				