

REV	DATE	MODIFICATION	DRAWN
B	2017/11/01	取消前端台阶与线孔增加弧形	Zach
A	2017/10/12	5.24台阶减胶变更	

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.

DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.

WITHSTAND VOLTAGE TIME: 60S.

INSULATION RESISTANCE: 100 M Ω .

TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 200POUND MIN.

DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE UL94V-0 OR UL94V-2.

COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.

CONTACT BLADE: COPPER ALLOY.

CONDUCTOR : STRANDED & SOLID WIRE .24AWG, 26 AWG.

(It can be used for the wire OD from 0.093-0.104)

GOLD PLATING: 3u"-50u". ARE AVAILABLE.

规范

1. 电器:

UL应用最大250VOLTS AC.

介质耐电压伏特数:1000VOLTS AC.

耐压时间:60S.

绝缘阻抗:100 百万欧姆.

终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试:至少20磅.

耐力测试:至少200次之插拔测试.

3. 材质表面处理

塑胶壳:聚碳酸酯, UL-94V-0 or UL94V-2.

颜色:透明 或者其他颜色亦可.

金片:铜合金.

导体:多股线&单股线,24AWG,26AWG.

(芯线直径: ϕ 0.093-1.04均可适用)






镀金厚度:3u"~50u", 皆可提供.

客户用产品图

宁波卓新通讯接插件有限公司

NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

DIMENSION IN mm (inch)		材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL	DWG NO.
.XX $\pm$ 0.20	.XX $\pm$ 5 $^{\circ}$	PC	PLUG-446-0001
.XX $\pm$ 0.10	.XX $\pm$ 2 $^{\circ}$	名称	TITLE
审核		制图	比例
沈红波	钟均江	CathyLi	2/1
APPROVAL	CHECKED	SCALE	张数
		角注	1/1
		PROJ.	更改
		REV	B

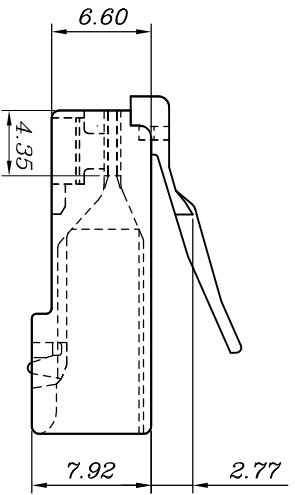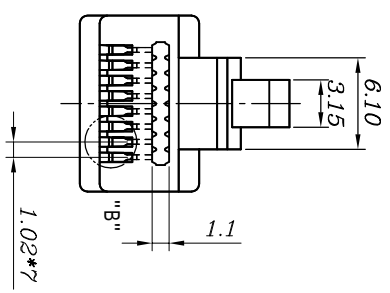

BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC	AL	ZL	YBL
Drawing												
Mark					✓							
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"		CABLE TYPE	ROUND	FLAT		
Mark					✓		Mark			✓		