


REVISION RECORD				
REV	ECN	DESCRIPTION	DFT	DATE

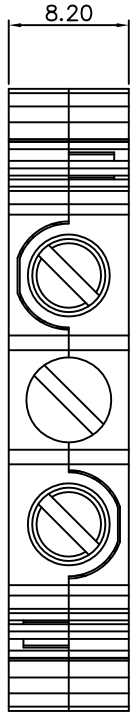

NOTES1:
UL Standard
1.Torque value : M4 , 10.53Lb.in
2.Wire range : 24~10AWG

IEC Standard


1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
2.Torque value : M4 , 1.2N·m	
3.Wire range : 0.2~6mm ²	

NOTES2:



- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.20mm, Poles : N=01P
- 3.Stripping length : 9~10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over	Over	Over	Over	Over	Over
6	10	30	60	100	150
TO	TO	TO	TO	TO	TO
6	10	24	30	60	100
±0.15±0.20±0.30±0.50±0.70±1.00±1.30 ±2°					

6.RoHS Compliance

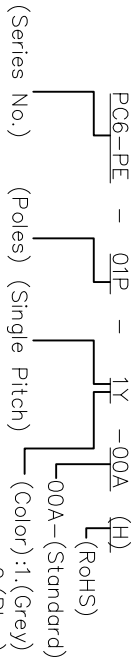

- 1.(RoHS)
- 00A-(Standard)
- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

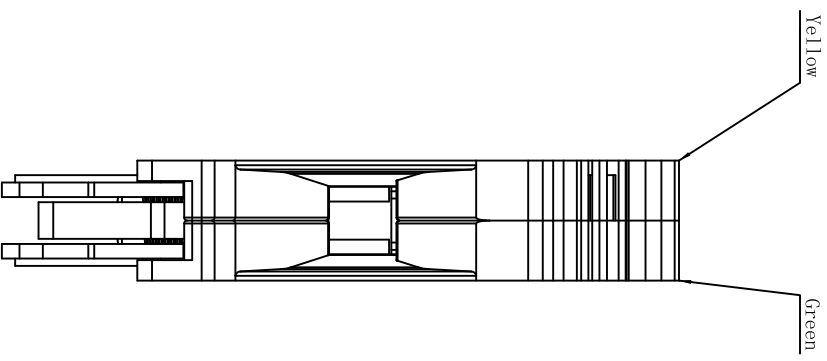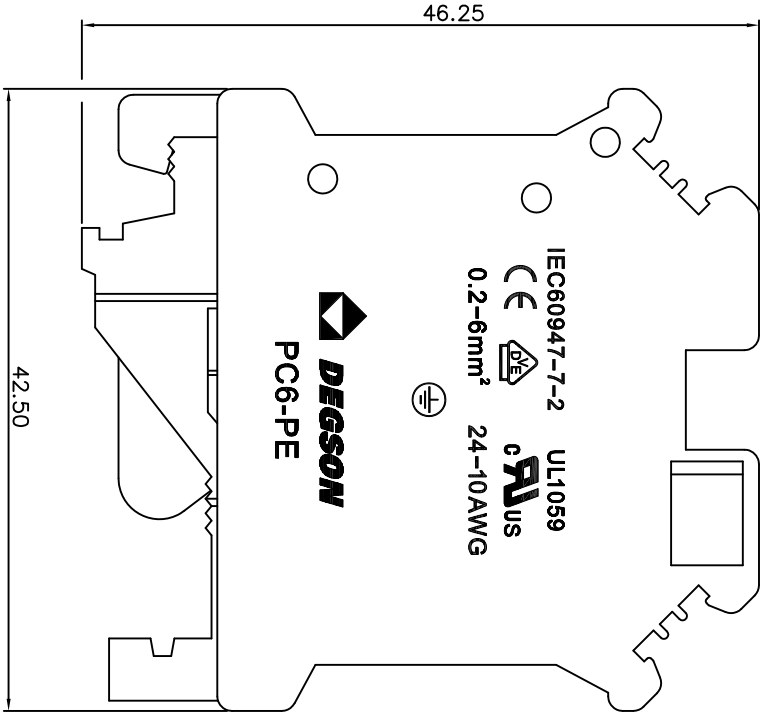

PART NO.:		NAME:	
/		PC6-PE-01P-1Y-00A(H)	
APPD:		CHKD:	
/		/	
DFT:		TITLE:	
/		CUSTOMER DRAWING	
THIRD ANGLE PROJECTION		DRAWING NO.:	
1:1		DO NOT SCALE DRAWING	
3		1	

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司