

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 15A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Torque value : M3 , 4.43lb.in
- 4.Wire range : 24~12AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	8.0kV
Rate Voltage(V)	800V
Rate Current(A)	16A






- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.2~4mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.20mm, Poles : N=01P
- 3.Stripping length : 8~9mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over	Over	Over	Over	Over	Over
6	10	30	60	100	150
TO	TO	TO	TO	TO	TO
6	10	24	30	60	100
±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30		±2°			

6.RoHS Compliance

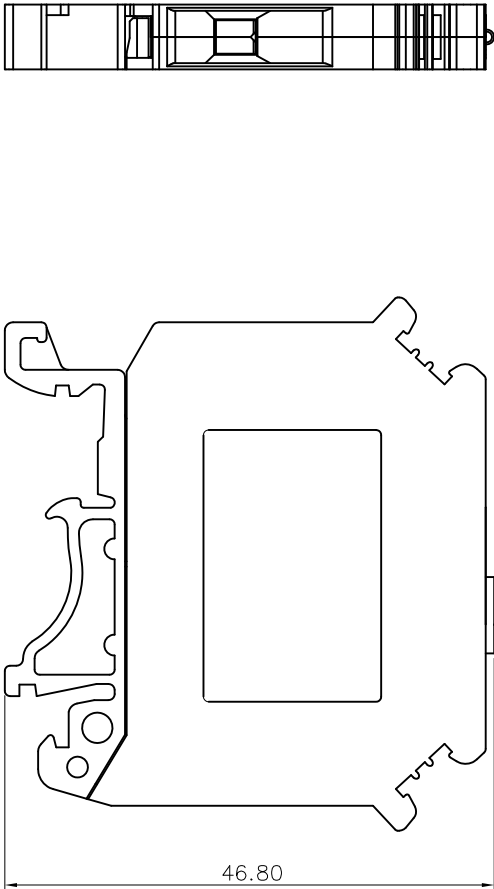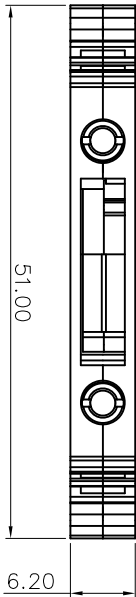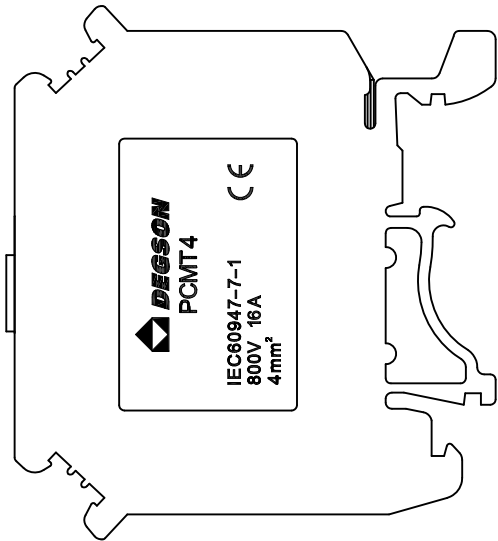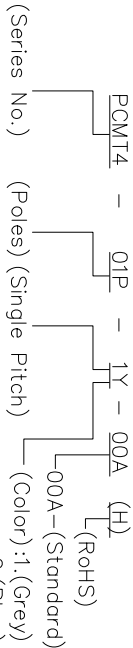

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	NAME:	PCMT4-01P-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		1:1	1:1