

PIN HEADER 90° DIP TYPE (2.54MM PITCH)





MATERIAL


- *Insulator : Polyester (UL 94V - 0)
- *Contact Pin : Brass
- *Contact Plated : Gold over NICKEL or Tin
- *Color : Black

SPECIFICATION


- *Current Rate : 3A
- *Operation Temperature : - 40°C to + 105°C
- *Dielectric Withstanding : AC 500V
- *Voltage : AC 250V
- *Insulation Resistance : 5000MΩ Min.

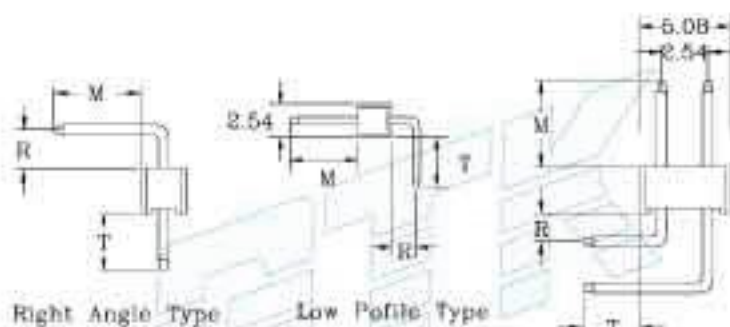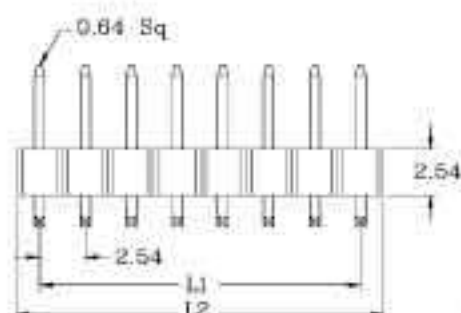

Recommended
P.C.Board
Hole Layout



Recommended
P.C.Board
Hole Layout



	DIMENSION
L1	2.54mm (0.05") x (POSITION NO. - 1)
L2	2.54mm (0.05") x POSITION NO.
M	Mating Length
T	Tail Length
R	Right Angle Length

UNIT : mm

Ordering Information

STANDARD DIMENSION : SHOW P/N END TO CODE #7

SPECIAL DIMENSION : KEEP SHOWING CODE #8-#12 (PS. 標準碼為7碼, 8-12碼需要加註於標準碼後)

PH	S	R	30	G	1	0	/	**	/	**	/	**	-	**	-	5V
1	2	3	4	5	6	7		8		9		10		11		12

1.SERIES NO (產品系列)
PH = PIN HEADER (排針)

2.ROW TYPE (排別)
S = SINGLE ROW (單排)
D = DOUBLE ROW (雙排)

3.TERMINAL TYPE (端子類別)
R = RIGHT ANGLE TYPE (90°)
L = LOW PROFILE TYPE (90°)

4.NO. OF PIN (端子數)
01 TO 40 (SINGLE ROW 單排)
04 TO 80 (DOUBLE ROW 雙排)

5.CONTACT PLATED (端子電鍍)
T = ALL TIN PLATED (全鍍錫)
G = ALL GOLD PLATED (全鍍金)
H = TIN PLATED ON TERMINAL
& GOLD PLATED ON CONTACT
(鍍半金鍍)

6.PITCH - PIN TO PIN (端子距離)
1 = 2.54MM

7.PITCH - ROW TO ROW (排距)
0 = SINGLE ROW ONLY (單排適用)
1 = 2.54MM DIP

8.SPECIAL MATING (特殊上針長度)
STANDARD : 6.0 MM

9.SPECIAL TAIL (特殊下針長度)
STANDARD : 3.0 MM

10.SPECIAL RIGHT ANGLE (特殊彎角高度)
STANDARD : 1.5 MM

11.SPECIAL PLASTIC HEIGHT (特殊塑膠高度)
STANDARD : 2.54 MM

12.PULL OUT PIN (拔PIN)
* V = NO. OF PIN