


Dimensional & Ordering Information:

Cir-cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

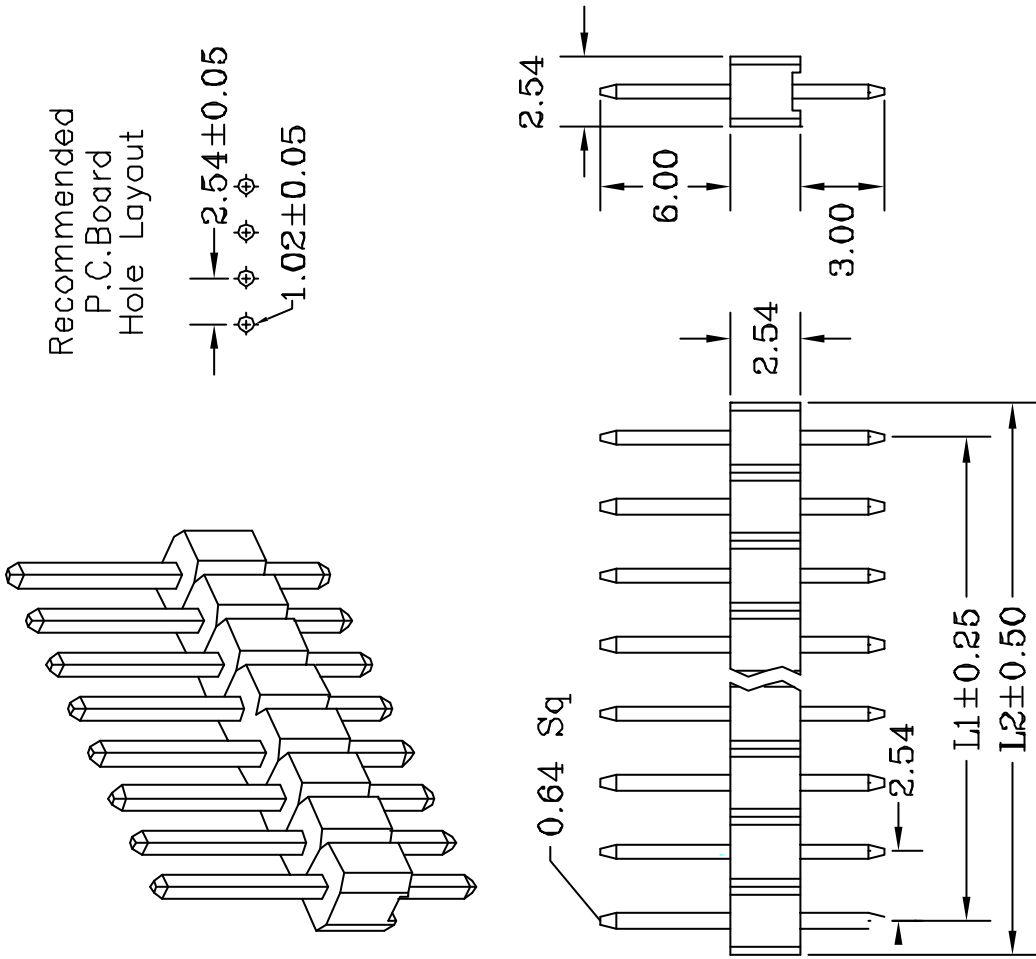

- APPLICATION AND FEATURES
1. Side and end stackable (on unbroken edges).
 2. Notches for easy breakable.
 3. Variable pin length, gold or tin plated.
 4. Standoffs facilitate post soldering clean.
 5. Mate with Mini Jumper and P.C.Board connectors e.g.

SPECIFICATIONS

Current Rating:
3 Amps

Insulator resistance:
5000 Megohms Min.

Dielectric withstanding:
AC 500 V

Voltage:
AC 250 V

Operating Temperature:
-40° - +105°C

Contact Material:
Brass

Insulator Material:
Standard:P.B.T

Finish:
Gold flash

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	
LINEAR	ANGLE	UNITS	TITLE
X. ±	X° ±	MM	PIN HEADER PITCH:2.54MM
.X ± 0.38	.X° ±	SCALE	CPART No
.XX ± 0.25	.XX° ±	SIZE	A4
.XXX ±	.XXX° ±		
APPD			
CHKD			
DRAW Tao.Tao.	JUL.05.2002		



REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL.05.02

PART NO.		PHSS**G10 (/RH)	
CAD NO.	I642	SHEET	
F:\Drw\PH\PH-0060		I OF 1	