


Cir- cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

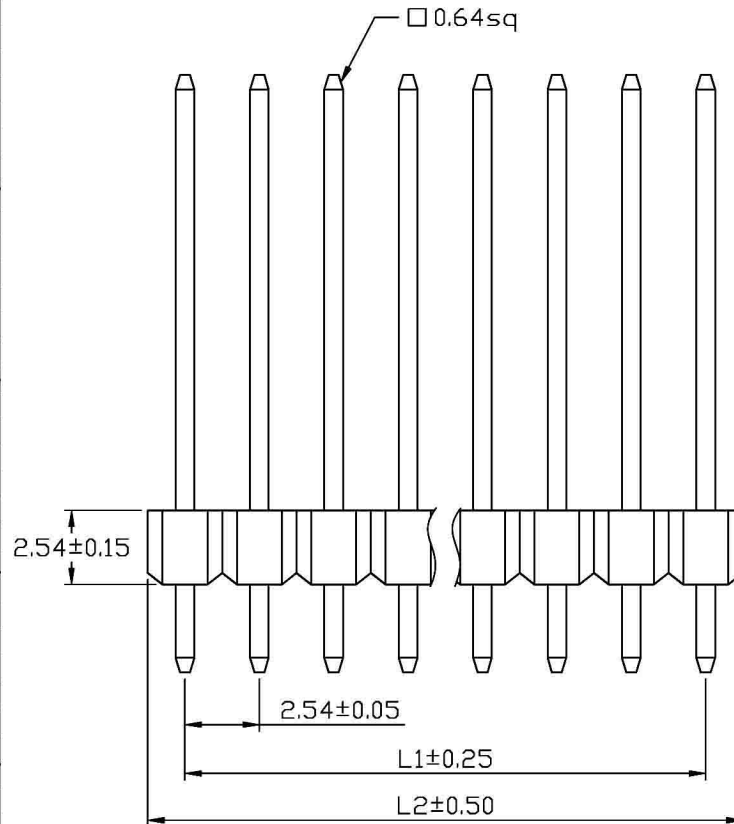


RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAR. 23'05
B		MODIFY P/N	JAN. 21'14

SPECIFICATIONS

Current Rating: 3 Amp
Voltage Rating: 230V
Insulator resistance: 5000 Megohms Min.
Contact Resistance: 20 m ohms Max.
Dielectric withstanding: AC 1000V/minute
Operating Temperature: -40° ~ +105°C
Contact Material: Brass
Insulator Material: Polyester UL94V-0
Standard Color: Black
Finish: Gold plated



RECOMMENDED P. C. B. LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR		ANGLE	UNITS		TITLE	
X. ±		X° ±	MM		2.54mm Pin Header Single Row Straight Dip Type	
.X ± 0.38		.X° ±	SCALE		PART NO.	
.XX ± 0.25		.XX° ±	SIZE		PHSS**G10-N233	
.XXX ±		.XXX° ±	A4		CAD NO. 1642	
APPD			DRAW		F:\PDF\PH\PH-0223	
CHKD			Z		SHEET 1 OF 1	
DRAW		JAN. 21'2014	CPART NO.		圖面編號: GTKGS1162-B(1)	