

PIN HEADER 180° DIP TYPE (2.54MM PITCH)





MATERIAL


- *Insulator : Polyester (UL94V-0)
- *Contact Pin : Brass
- *Contact Plated : Gold over Nickel or Tin
- *Color : Black

SPECIFICATION



- *Current Rate : 3A
- *Operation Temperature : - 40°C to + 105°C
- *Dielectric Withstanding : AC 500V
- *Voltage : AC 250V
- *Insulation Resistance : 5000MΩ Min.

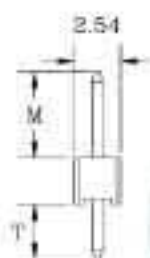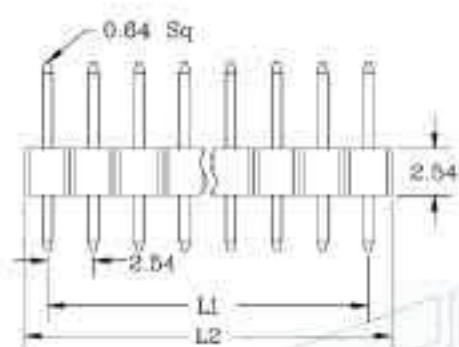


Recommended
P.C.Board
Hole Layout



Recommended
P.C.Board
Hole Layout

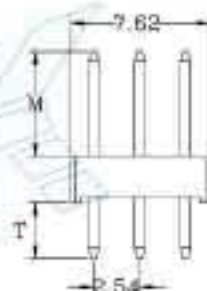

Recommended
P.C.Board
Hole Layout



DIMENSION	
L1	2.54mm (0.09") x (POSITION NO. - 1)
L2	2.54mm (0.09") x POSITION NO.
M	Mating Length
T	Tail Length

UNIT : mm

Ordering Information

STANDARD DIMENSION : SHOW P/N END TO CODE #7

SPECIAL DIMENSION : KEEP SHOWING CODE #8~#11 (PS. 標準碼為7碼, 第8~11碼視需要加註於標準碼後)

PH	S	S	10	G	1	0	/	**	/	**	-	**	-	5V
1	2	3	4	5	6	7		8		9		10		11

1.SERIES NO (產品系列)

PH = PIN HEADER (排針)

2.ROW TYPE (排別)

S = SINGLE ROW (單排)
D = DOUBLE ROW (雙排)
T = TRIPLE ROW (三排)

3.TERMINAL TYPE (端子類別)

S = STRAIGHT TYPE (180°)

4.NO. OF PIN (端子數)

01 TO 40 (SINGLE ROW 單排)
04 TO 80 (DOUBLE ROW 雙排)
09 TO 120 (TRIPLE ROW 三排)

5.CONTACT PLATED (端子電鍍)

T = ALL TIN PLATED (全鍍錫)
G = ALL GOLD PLATED (全鍍金)
H = TIN PLATED ON TERMINAL
& GOLD PLATED ON CONTACT
(鍍半金鍍)

6.PITCH - PIN TO PIN (端子距離)

1 = 2.54MM

7.PITCH - ROW TO ROW (排距)

0 = SINGLE ROW ONLY (單排適用)
1 = 2.54MM DIP

8.SPECIAL MATING (特殊上針長度)

STANDARD : 6.0 MM

9.SPECIAL TAIL (特殊下針長度)

STANDARD : 3.0 MM

10.SPECIAL PLASTIC HEIGHT (特殊塑膠高度)

STANDARD : 2.54 MM

11.PULL OUT PIN (拔PIN)

* V = NO. OF PIN