


- DE
- CN

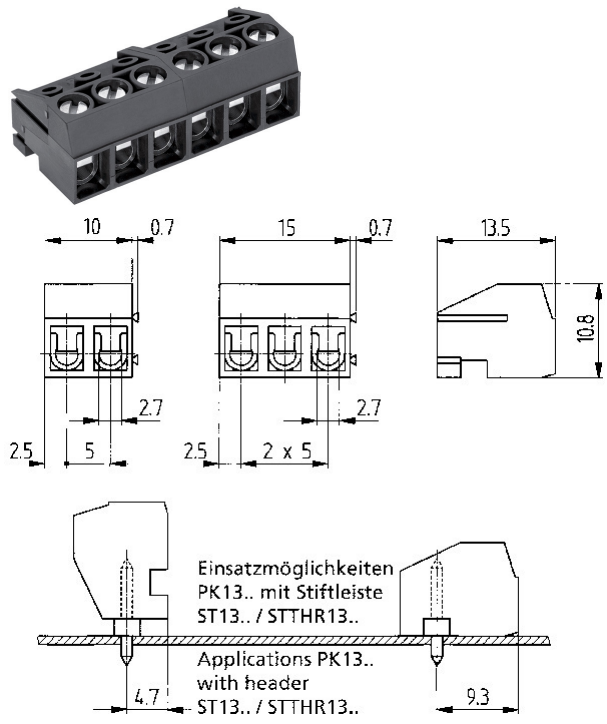

## PK 13

### PCB terminal connector

- 5.0mm pitch
- with wire guard
- two dove tails for extra stable plugging
- horizontal or vertical plugging on header possible
- 2 - 12 poles
- 2- and 3-pole modules
- parallel or vertical wire connection depending on plugging direction

tested according to EN61984

Rated voltage	250 V
Rated current	10 A
Rated current (ambient temperature)	10 A(T55)
Overvoltage category	III
Rated impulse voltage	4 kV
Pollution degree	3
Torque	0.4 Nm
Screw size	M2.6
Rated cross section solid wire	0.5 - 1.5 mm²
Rated cross section stranded wire	0.5 - 1.5 mm²

tested according to UL1059, CSA22.2No.158

- Cross section
- Dimensions
- Material
- Temperatures
- Other Data