



PLS-28 結構圖




PLS-28-AD(F)M

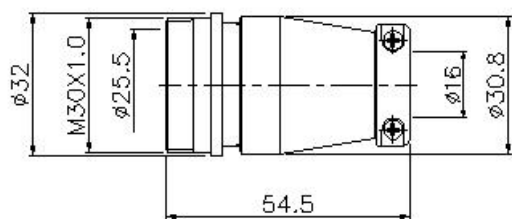


PLS-28-ADF

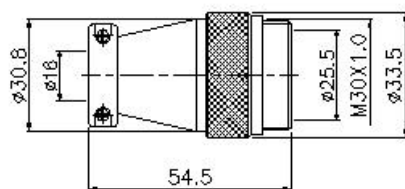


PLS-28-ADM

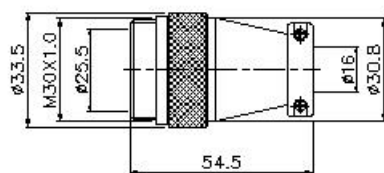


PLS-28-GPF

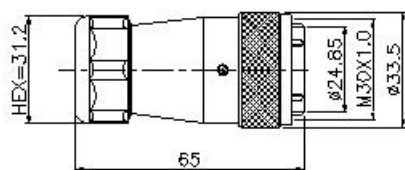


PLS-28-GPM

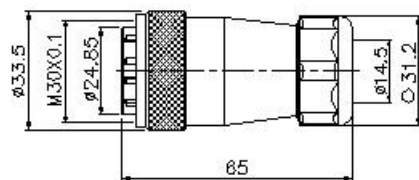


PLS-28-PF

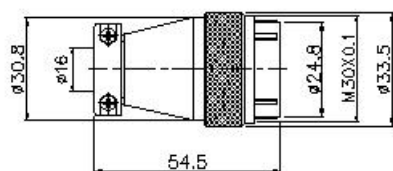


PLS-28-PM

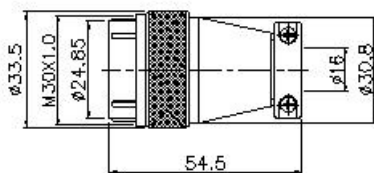


PLS-28-RF

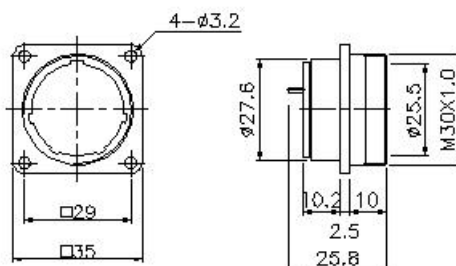

PLS-28-RM

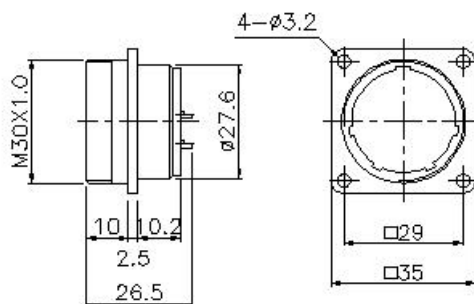

PLS-28-RCa



No. of contacts

Contacts
Configuration

Rated current/voltage

Operation limit voltage (AC.V.rms)

Withstanding voltage (AC.V.rms) 1 minute

Insulation resistance (MΩ MIN.) at DC 500V

Contact resistance (MΩ MAX.) AT DC 1A

Pin diameter (Ømm)

7



15A 250V

12



10A 250V

16



5A 250V

17



5A 250V

20



5A 250V

26



5A 250V