


R13-208

Shorter Frame Than R13-112

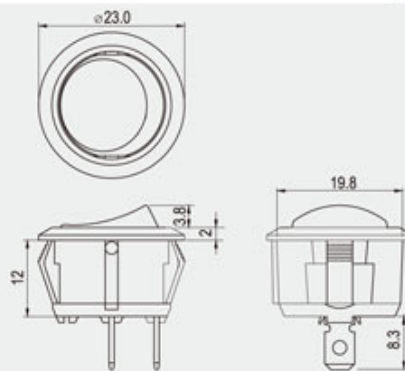

Rating
16A 125V AC 10A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out
 19 4.2 2.2 2.2 2-3.0 mm max 0.7-3.0 mm max

FEATURES

- * MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
- * Snap-in mounting, easy to install switch into panel.
- * Waterproof covew (R13-112-12, refer page 7-3) and wire connector are optional.
- * The dimension of frame is 12mm, for longer one, please refer to page 1-51~1-52 item no. R13-112.



Ordering number instruction

R13-208 -

FUNCTION				TERMINAL		
Different button (按鈕不同)				0 2 .187" SQ		
A	2	5	2 B	0 9 PC A/C/D/E/F/G/H/I		
Illuminated / Different button (帶燈/按鈕不同)				1 2 SO A/C/D/E/F/G/H/I		
B	2					
Momentary / Illuminated / Different button (彈回/帶燈/按鈕不同)						
B F	2 F					
Different position (動作特性不同)						
C						
Momentary (彈回)						
E	F	G	H			
I						