

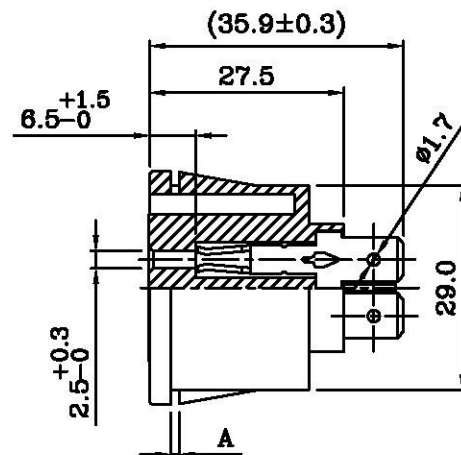
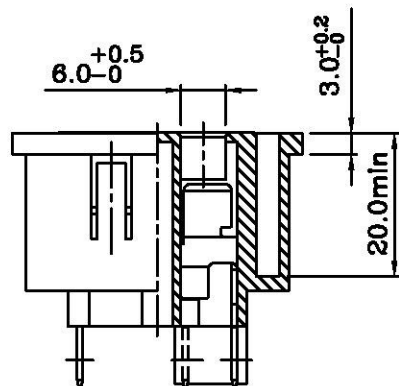
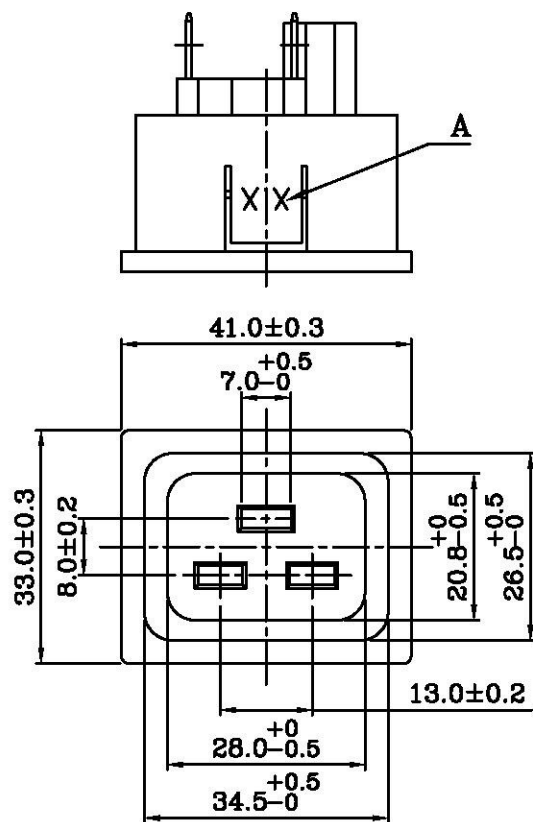


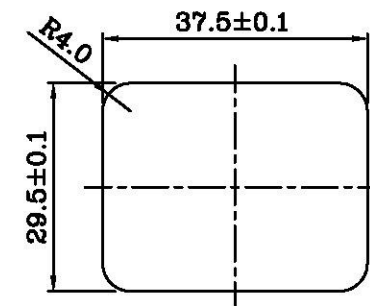

代碼	間 隙	
A	12	1.2
	15	1.5
	17	1.7
	20	2.0
	25	2.5



PANEL CUT-OUT


SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Fiber Thermoplastic . UL 94V-2~0

Rating:AC 20A 250V	
Mark	Safety Regulation
cULus	cULus
Rating:AC 16A 250V	
Mark	Safety Regulation
VDE	VDE
CCC	CCC

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

SHALLIN ELECTRONIC CO., LTD.



UNIT

mm

UNIT QTY

1

SCALE

1:1

TOLERANCE

X.XX±0.1

XX.XX±0.2

XXX.XX±0.3

PRODUCT NO.

C19

REV

DRAWN BY

李

2009.10.14

小英

APPROVED BY

羅

2009.10.14

士凱

ID NO

09101401Q

INTERIM NO.

DESCRIPTION

NEW NO.

C