


WIRE-WOUND VARIABLE RESISTORS

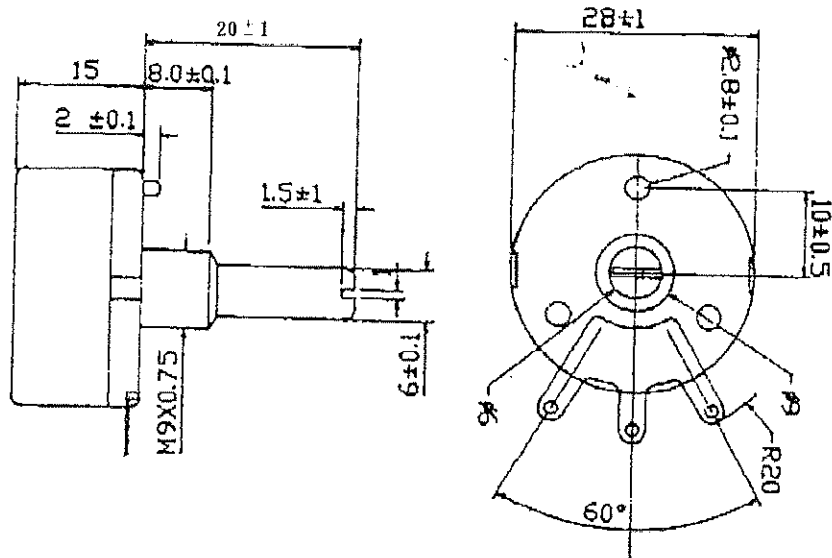

3			NAME	RA28YN-20 S-B5K		
2						
1						
NO	DATE	DESCRIPTION	DRAWING NO			
TOL UNLESS OTHER WISE STATE			DRAWN BY	CHECK BY	APPROVED BY	
LESS THAN		10 ± 0.3		李鑫	劉麗紅	
ABOVE		10-30 ± 0.5				
ABOVE		30-100 ± 0.5				
Angular dimaension		± 5				

達耀電子有限公司

APPLICATION:

ELECTRONICAL SPECIFICATION

1.TOTAL RESISTANCE RANGE 全電阻值	100 ohm ~ 5 K ohm $\pm 20\%$
2.INSULATION RESISTANCE 絕緣抵抗	500V 100Mohm over
3.END RESISTANCE 殘留電阻值	Terminal 1-2 0.5 ohm under Terminal 2-3 0.5 ohm under
4.RESISTANCE TAPER 阻值線性	B(Linear)
5.RESISTORS NOISE 摺動雜音	47 mv
6.DIELECTRIC STRENGTH 耐電壓	50 HZ AC:1000V/1minute
7.ROTATION LIFE 回轉壽命	15,000 cycles
8.RATED POWER 定格電力	2W
9.TEMPO TOLERANCE 4速度誤差	- db $\pm$ db 音量用 %位置 $\pm$ db 音實用 - db $\pm$ db 音量用

MECHANICA CHARACTERISTICS

1.MECHANICAL ANGLE 回轉角度	300°±5°			
2.STOP STRENGTH 回轉止強度	6kgf.cm over			
3.ROTATIONAL TORQUE 回轉力距量	30~200g.cm			
4.BUSHING NUT TIGHTING STRENGTH 螺紋強度	10kgf-cm over			
5.PUSH PULL STRENGTH 軸之張力壓力強度	1kgf over			
承認	核對	作成	圖名	圖號
劉麗紅	李鑫			811002

達羅電子有限公司