


Switch disconnectors

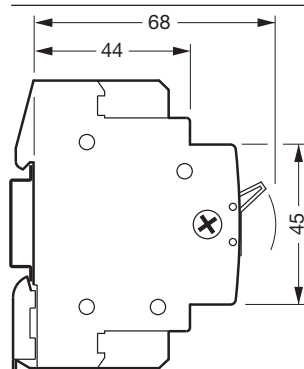

Description

For use a switch as a disconnector in all types of circuit.

Complies with : EN 60 947-3 all ratings

Technical data
utilisation category
AC 22B

In : 16, 25, 32A

shrouded cable clamps
connection capacity:
16mm² rigid conductor
10mm² flexible conductor

In : 40, 63, (1 pole)

cable clamps,
connection capacity:
25mm² rigid conductor
16mm² flexible conductor

In : 80A, 100A

cable clamps
connection capacity:
50mm² rigid conductor
35mm² flexible conductor
All switches have a green / red indication on the handle giving positive contact indication

use MZN175 as locking device



SB140

Single pole



1 x 16A	250V~	1	12	SB116
1 x 16A	250V~	1	1	SB116V
with pilot light				
1 x 25A	250V~	1	12	SB125
1 x 25A	250V~	1	1	SB125V
with pilot light				
1 x 32A	250V~	1	1	SB132
1 x 32A	250V~	1	1	SB132V
with pilot light				
1 x 40A	250V~	1	1	SB140
1 x 63A	250V~	1	1	SB163
1 x 80A	250V~	1	1	SB180
1 x 100A	250V~	1	1	SB199



SB232 SB240

Double pole



2 x 16A	250V~	1	12	SB216
2 x 16A	250V~	1	1	SB216V
with pilot light				
2 x 25A	250V~	1	12	SB225
2 x 25A	250V~	1	1	SB225V
with pilot light				
2 x 32A	250V~	1	1	SB232
2 x 32A	250V~	1	1	SB232V
with pilot light				
2 x 40A	250V~	1	1	SB240
2 x 63A	250V~	1	6	SB263
2 x 80A	250V~	1	1	SB280
2 x 100A	250V~	1	1	SB299



SB363

Triple pole



3 x 16A	400V~	2	1	SB316
3 x 25A	400V~	2	1	SB325
3 x 32A	400V~	2	1	SB332
3 x 32A	400V~	3	1	SB332Q
large terminals				
3 x 40A	400V~	3	1	SB340
3 x 63A	400V~	3	1	SB363
3 x 80A	400V~	3	1	SB380
3 x 100A	400V~	3	1	SB399

Designation

Characteristics


Width in 17.5mm

Pack qty.

Cat. ref.
neutral left

Cat. ref.
neutral right

Four pole



4 x 16A	400V~	2	1	SB416F	SB416
4 x 25A	400V~	2	1	SB425F	SB425
4 x 32A	400V~	2	1	SB432F	SB432
4 x 40A	400V~	4	1	SB440F	SB440
4 x 63A	400V~	4	1	SB463F	SB463
4 x 80A	400V~	4	1	SB480F	SB480
4 x 100A	400V~	4	1	SB499F	SB499