

SN5485, SN54LS85, SN54S85 SN7485, SN74LS85, SN74S85 4-BIT MAGNITUDE COMPARATORS

SDLS123 – MARCH 1974 – REVISED MARCH 1988

| TYPE | TYPICAL POWER DISSIPATION | TYPICAL DELAY (4-BIT WORDS) |
|-------|---------------------------------|-----------------------------------|
| '85 | 275 mW | 23 ns |
| 'LS85 | 52 mW | 24 ns |
| 'S85 | 365 mW | 11 ns |

description


These four-bit magnitude comparators perform comparison of straight binary and straight BCD (8-4-2-1) codes. Three fully decoded decisions about two 4-bit words (A, B) are made and are externally available at three outputs. These devices are fully expandable to any number of bits without external gates. Words of greater length may be compared by connecting comparators in cascade. The $A > B$, $A < B$, and $A = B$ outputs of a stage handling less-significant bits are connected to the corresponding $A > B$, $A < B$, and $A = B$ inputs of the next stage handling more-significant bits. The stage handling the least-significant bits must have a high-level voltage applied to the $A = B$ input. The cascading paths of the '85, 'LS85, and 'S85 are implemented with only a two-gate-level delay to reduce overall comparison times for long words. An alternate method of cascading which further reduces the comparison time is shown in the typical application data.

SN5485, SN54LS85, SN54S85 . . . J OR W PACKAGE

SN7485 . . . N PACKAGE


SN74LS85, SN74S85 . . . D OR N PACKAGE

(TOP VIEW)



SN54LS85, SN54S85 . . . FK PACKAGE

(TOP VIEW)

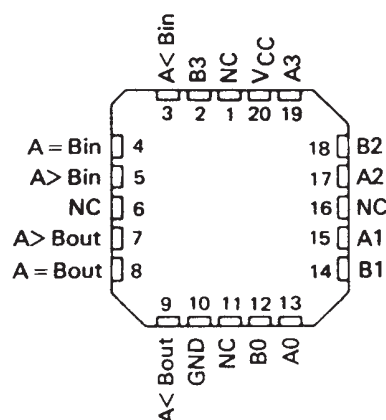

NC - No internal connection

FUNCTION TABLE

| COMPARING INPUTS | | | | CASCADING INPUTS | | | OUTPUTS | | |
|---------------------|---------|---------|---------|---------------------|-------|-------|---------|-------|-------|
| A3, B3 | A2, B2 | A1, B1 | A0, B0 | A > B | A < B | A = B | A > B | A < B | A = B |
| A3 > B3 | X | X | X | X | X | X | H | L | L |
| A3 < B3 | X | X | X | X | X | X | L | H | L |
| A3 = B3 | A2 > B2 | X | X | X | X | X | H | L | L |
| A3 = B3 | A2 < B2 | X | X | X | X | X | L | H | L |
| A3 = B2 | A2 = B2 | A1 > B1 | X | X | X | X | H | L | L |
| A3 = B3 | A2 = B2 | A1 < B1 | X | X | X | X | L | H | L |
| A2 = B3 | A2 = B2 | A1 = B1 | A0 > B0 | X | X | X | H | L | L |
| A3 = B3 | A2 = B2 | A1 = B1 | A0 < B0 | X | X | X | L | H | L |
| A3 = B3 | A2 = B2 | A1 = B1 | A0 = B0 | H | L | L | H | L | L |
| A3 = B3 | A2 = B2 | A1 = B1 | A0 = B0 | L | H | L | L | H | L |
| A3 = B3 | A2 = B2 | A1 = B1 | A0 = B0 | X | X | H | L | L | H |
| A3 = B3 | A2 = B2 | A1 = B1 | A0 = B0 | H | H | L | L | L | L |
| A3 = B3 | A2 = B2 | A1 = B1 | A0 = B0 | L | L | L | H | H | L |

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1988, Texas Instruments Incorporated


SN5485, SN54LS85, SN54S85 SN7485, SN74LS85, SN74S85 4-BIT MAGNITUDE COMPARATORS

SDLS123 – MARCH 1974 – REVISED MARCH 1988

logic diagrams (positive logic)

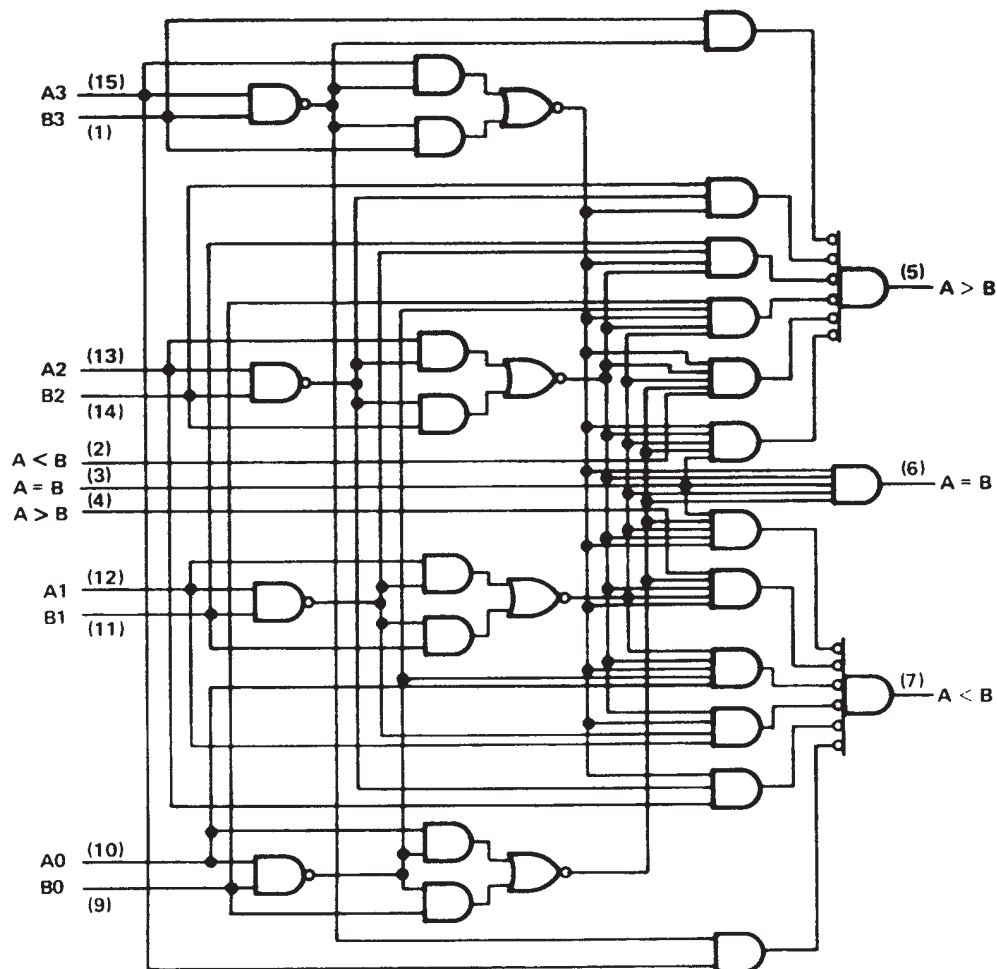



logic symbol†

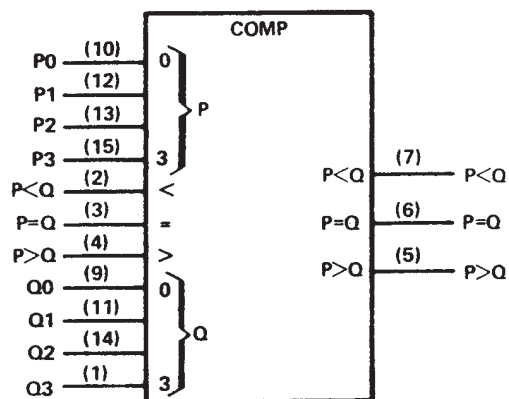

†This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for D, J, N, and W packages.

schematics of inputs and outputs

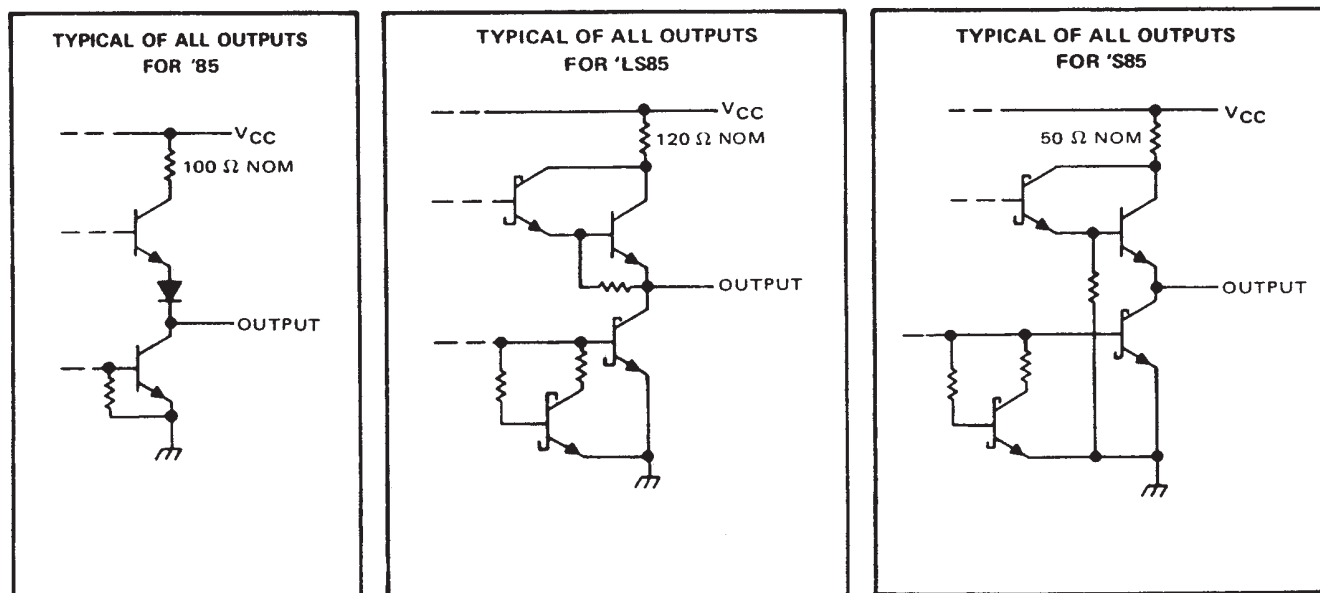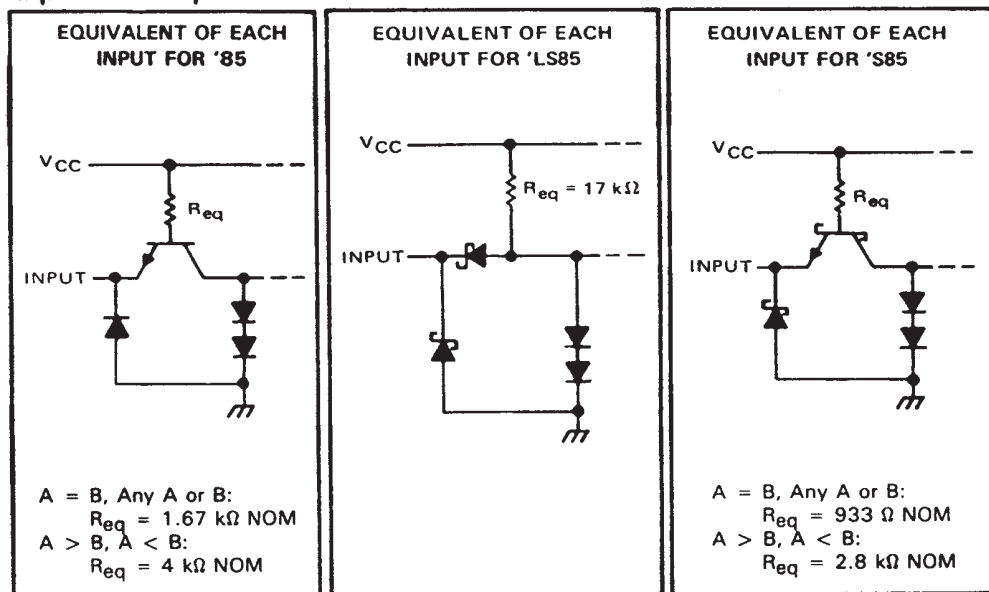

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | SN54' SN54S' | SN54LS' | SN74' SN74S' | SN74LS' | UNIT |
|---------------------------------------|-----------------|---------|-----------------|---------|------|
| Supply voltage, V_{CC} (see Note 1) | 7 | 7 | 7 | 7 | V |
| Input voltage | 5.5 | 7 | 5.5 | 7 | V |
| Interemitter voltage (see Note 2) | 5.5 | | 5.5 | | V |
| Operating free-air temperature range | -55 to 125 | | -0 to 70 | | °C |
| Storage temperature range | -65 to 150 | | -65 to 150 | | °C |

- NOTES: 1. Voltage values, except interemitter voltage, are with respect to network ground terminal.
 2. This is the voltage between two emitters of a multiple-emitter input transistor. This rating applies to each A input in conjunction with its respective B input of the '85 and 'S85.

SN5485, SN54LS85, SN54S85 SN7485, SN74LS85, SN74S85 4-BIT MAGNITUDE COMPARATORS

SDLS123 – MARCH 1974 – REVISED MARCH 1988

recommended operating conditions

| | SN5485 | | | SN7485 | | | UNIT |
|---------------------------------------|--------|-----|------|--------|-----|------|-------------|
| | MIN | NOM | MAX | MIN | NOM | MAX | |
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | V |
| High-level output current, I_{OH} | | | –400 | | | –400 | μA |
| Low-level output current, I_{OL} | | | 16 | | | 16 | mA |
| Operating free-air temperature, T_A | –55 | | 125 | 0 | | 70 | $^{\circ}C$ |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS† | | MIN | TYP‡ | MAX | UNIT |
|-----------|--|--|---|-----|------|------|---------|
| V_{IH} | High-level input voltage | | | 2 | | | V |
| V_{IL} | Low-level input voltage | | | | | 0.8 | V |
| V_{IK} | Input clamp voltage | $V_{CC} = \text{MIN},$ $I_I = -12 \text{ mA}$ | | | | –1.5 | V |
| V_{OH} | High-level output voltage | $V_{CC} = \text{MIN},$ $V_{IL} = 0.8 \text{ V},$ $I_{OH} = -400 \mu A$ | $V_{IH} = 2 \text{ V},$ $I_{OH} = -400 \mu A$ | 2.4 | 3.4 | | V |
| V_{OL} | Low-level output voltage | $V_{CC} = \text{MIN},$ $V_{IL} = 0.8 \text{ V},$ $I_{OL} = 16 \text{ mA}$ | $V_{IH} = 2 \text{ V},$ $I_{OL} = 16 \text{ mA}$ | 0.2 | 0.4 | | V |
| I_I | Input current at maximum input voltage | $V_{CC} = \text{MAX},$ $V_I = 5.5 \text{ V}$ | | | | 1 | mA |
| I_{IH} | High-level input current | $A < B, A > B$ inputs all other inputs $V_{CC} = \text{MAX},$ $V_I = 2.4 \text{ V}$ | | | | 40 | μA |
| I_{IL} | Low-level input current | | | | | 120 | μA |
| I_{IH} | High-level input current | $A < B, A > B$ inputs all other inputs $V_{CC} = \text{MAX},$ $V_I = 0.4 \text{ V}$ | | | | –1.6 | mA |
| I_{IL} | Low-level input current | | | | | –4.8 | mA |
| I_{OS} | Short-circuit output current§ | $V_{CC} = \text{MAX}, V_O = 0$ | SN5485 | –20 | | –55 | mA |
| I_{OS} | Short-circuit output current§ | | SN7485 | –18 | | –55 | mA |
| I_{CC} | Supply current | $V_{CC} = \text{MAX},$ See Note 4 | | | 55 | 88 | mA |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^{\circ}C$.

§ Not more than one output should be shorted at a time.

NOTE 4: I_{CC} is measured with outputs open, $A = B$ grounded, and all other inputs at 4.5 V.

switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^{\circ}C$

| PARAMETER¶ | FROM INPUT | TO OUTPUT | NUMBER OF GATE LEVELS | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------|-----------------------|----------------|-----------------------|---|-----|-----|-----|------|
| t_{PLH} | Any A or B data input | $A < B, A > B$ | 1 | $C_L = 15 \text{ pF},$ $R_L = 400 \Omega,$ See Note 5 | | 7 | | ns |
| | | | 2 | | | 12 | | |
| | | | 3 | | | 17 | 26 | |
| | | $A = B$ | 4 | | | 23 | 35 | |
| t_{PHL} | Any A or B data input | $A < B, A > B$ | 1 | | | 11 | | ns |
| | | | 2 | | | 15 | | |
| | | | 3 | | | 20 | 30 | |
| | | $A = B$ | 4 | | | 20 | 30 | |
| t_{PLH} | $A < B$ or $A = B$ | $A > B$ | 1 | | | 7 | 11 | ns |
| t_{PHL} | $A < B$ or $A = B$ | $A > B$ | 1 | | | 11 | 17 | ns |
| t_{PLH} | $A = B$ | $A = B$ | 2 | | | 13 | 20 | ns |
| t_{PHL} | $A = B$ | $A = B$ | 2 | | | 11 | 17 | ns |
| t_{PLH} | $A > B$ or $A = B$ | $A < B$ | 1 | | | 7 | 11 | ns |
| t_{PHL} | $A > B$ or $A = B$ | $A < B$ | 1 | | | 11 | 17 | ns |

¶ t_{PLH} = propagation delay time, low-to-high-level output

t_{PHL} = propagation delay time, high-to-low-level output

NOTE 5: Load circuits and voltage waveforms are shown in Section 1.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

recommended operating conditions

| | SN54LS85 | | | SN74LS85 | | | UNIT |
|---------------------------------------|----------|-----|------|----------|-----|------|--------------|
| | MIN | NOM | MAX | MIN | NOM | MAX | |
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | V |
| High-level output current, I_{OH} | | | -400 | | | -400 | μ A |
| Low-level output current, I_{OL} | | | 4 | | | 8 | mA |
| Operating free-air temperature, T_A | -55 | | 125 | 0 | | 70 | $^{\circ}$ C |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS [†] | SN54LS85 | | | SN74LS85 | | | UNIT |
|-----------|---|---|----------|------------------|------|----------|------------------|------|---------|
| | | | MIN | TYP [‡] | MAX | MIN | TYP [‡] | MAX | |
| V_{IH} | High-level input voltage | | 2 | | | 2 | | | V |
| V_{IL} | Low-level input voltage | | | | 0.7 | | | 0.7 | V |
| V_{IK} | Input clamp voltage | $V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$ | | | -1.5 | | | -1.5 | V |
| V_{OH} | High-level output voltage | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL \text{ max}}, I_{OH} = -400 \mu\text{A}$ | 2.5 | 3.4 | | 2.7 | 3.4 | | V |
| V_{OL} | Low-level output voltage | $V_{CC} = \text{MIN}, I_{OL} = 4 \text{ mA}$ | | 0.25 | 0.4 | | 0.25 | 0.4 | V |
| | | $V_{IH} = 2 \text{ V}, V_{IL} = V_{IL \text{ max}}, I_{OL} = 8 \text{ mA}$ | | | | | 0.35 | 0.5 | |
| I_I | Input current at maximum input voltage | A < B, A > B inputs | | | 0.1 | | | 0.1 | mA |
| | | all other inputs | | | 0.3 | | | 0.3 | |
| I_{IH} | High-level input current | A < B, A > B inputs | | | 20 | | | 20 | μ A |
| | | all other inputs | | | 60 | | | 60 | |
| I_{IL} | Low-level input current | A < B, A > B inputs | | | -0.4 | | | -0.4 | mA |
| | | all other inputs | | | -1.2 | | | -1.2 | |
| I_{OS} | Short-circuit output current [§] | $V_{CC} = \text{MAX}$ | -20 | | -100 | -20 | | -100 | mA |
| I_{CC} | Supply current | $V_{CC} = \text{MAX}$, See Note 4 | | 10.4 | 20 | | 10.4 | 20 | mA |

[†]For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

[‡]All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$.

[§]Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

NOTE 4: I_{CC} is measured with outputs open, A = B grounded, and all other inputs at 4.5 V.

switching characteristics, $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$

| PARAMETER [†] | FROM INPUT | TO OUTPUT | NUMBER OF GATE LEVELS | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------|-----------------------|--------------|-----------------------|--|-----|-----|-----|------|
| t_{PLH} | Any A or B data input | A < B, A > B | 1 | $C_L = 15 \text{ pF}$, $R_L = 2 \text{ k}\Omega$, See Note 5 | | 14 | | ns |
| | | | 2 | | | 19 | | |
| | | | 3 | | | 24 | 36 | |
| | | A = B | 4 | | | 27 | 45 | |
| t_{PHL} | Any A or B data input | A < B, A > B | 1 | | | 11 | | ns |
| | | | 2 | | | 15 | | |
| | | | 3 | | | 20 | 30 | |
| | | A = B | 4 | | | 23 | 45 | |
| t_{PLH} | A < B or A = B | A > B | 1 | | | 14 | 22 | ns |
| t_{PHL} | A < B or A = B | A > B | 1 | | | 11 | 17 | ns |
| t_{PLH} | A = B | A = B | 2 | | | 13 | 20 | ns |
| t_{PHL} | A = B | A = B | 2 | | | 13 | 26 | ns |
| t_{PLH} | A > B or A = B | A < B | 1 | | | 14 | 22 | ns |
| t_{PHL} | A > B or A = B | A < B | 1 | | | 11 | 17 | ns |

[†] t_{PLH} = propagation delay time, low-to-high-level output

t_{PHL} = propagation delay time, high-to-low-level output

NOTE 5: Load circuits and voltage waveforms are shown in Section 1.

SN5485, SN54LS85, SN54S85 SN7485, SN74LS85, SN74S85 4-BIT MAGNITUDE COMPARATORS

SDLS123 – MARCH 1974 – REVISED MARCH 1988

recommended operating conditions

| | SN54S85 | | | SN74S85 | | | UNIT |
|---------------------------------------|---------|-----|-----|---------|-----|------|------|
| | MIN | NOM | MAX | MIN | NOM | MAX | |
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | V |
| High-level output current, I_{OH} | | | -1 | | | -1 | mA |
| Low-level output current, I_{OL} | | | 20 | | | 20 | mA |
| Operating free-air temperature, T_A | -55 | | 125 | 0 | | 70 | °C |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS† | MIN | TYP‡ | MAX | UNIT |
|-----------|--|--|---------|------|------|---------------|
| V_{IH} | High-level input voltage | | 2 | | | V |
| V_{IL} | Low-level input voltage | | | | 0.8 | V |
| V_{IK} | Input clamp voltage | $V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$ | | | -1.2 | V |
| V_{OH} | High-level output voltage | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$ $V_{IL} = 0.8 \text{ V}, I_{OH} = -1 \text{ mA}$ | SN54S85 | 2.5 | 3.4 | V |
| | | | SN74S85 | 2.7 | 3.4 | |
| V_{OL} | Low-level output voltage | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$ $V_{IL} = 0.8 \text{ V}, I_{OL} = 20 \text{ mA}$ | | | 0.5 | V |
| I_I | Input current at maximum input voltage | $V_{CC} = \text{MAX}, V_I = 5.5 \text{ V}$ | | | 1 | mA |
| I_{IH} | High-level input current | A < B, A > B inputs | | | 50 | μA |
| | | all other inputs | | | 150 | |
| I_{IL} | Low-level input current | A < B, A > B inputs | | | -2 | mA |
| | | all other inputs | | | -6 | |
| I_{OS} | Short-circuit output current§ | $V_{CC} = \text{MAX}$ | -40 | | -100 | mA |
| I_{CC} | Supply current | $V_{CC} = \text{MAX}$, See Note 4 | | 73 | 115 | mA |
| | | $V_{CC} = \text{MAX}, T_A = 125^\circ\text{C}$, See Note 4 | | | 110 | |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

NOTE 4: I_{CC} is measured with outputs open, A = B grounded, and all other inputs at 4.5 V.

switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$

| PARAMETER¶ | FROM INPUT | TO OUTPUT | NUMBER OF GATE LEVELS | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------|-----------------------|--------------|-----------------------|---|-----|------|------|------|
| t_{PLH} | Any A or B data input | A < B, A > B | 1 | $C_L = 15 \text{ pF},$ $R_L = 280 \Omega,$ See Note 5 | | 5 | | ns |
| | | | 2 | | | 7.5 | | |
| | | | 3 | | | 10.5 | 16 | |
| | | A = B | 4 | | | 12 | 18 | |
| t_{PHL} | Any A or B data input | A < B, A > B | 1 | | | 5.5 | | ns |
| | | | 2 | | | 7 | | |
| | | | 3 | | | 11 | 16.5 | |
| | | A = B | 4 | | | 11 | 16.5 | |
| t_{PLH} | A < B or A = B | A > B | 1 | | | 5 | 7.5 | ns |
| t_{PHL} | A < B or A = B | A > B | 1 | | | 5.5 | 8.5 | ns |
| t_{PLH} | A = B | A = B | 2 | | | 7 | 10.5 | ns |
| t_{PHL} | A = B | A = B | 2 | | | 5 | 7.5 | ns |
| t_{PLH} | A > B or A = B | A < B | 1 | | | 5 | 7.5 | ns |
| t_{PHL} | A > B or A = B | A < B | 1 | | | 5.5 | 8.5 | ns |

¶ t_{PLH} = propagation delay time, low-to-high-level output


t_{PHL} = propagation delay time, high-to-low-level output

NOTE 5: Load circuits and voltage waveforms are shown in Section 1.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TYPICAL APPLICATION DATA

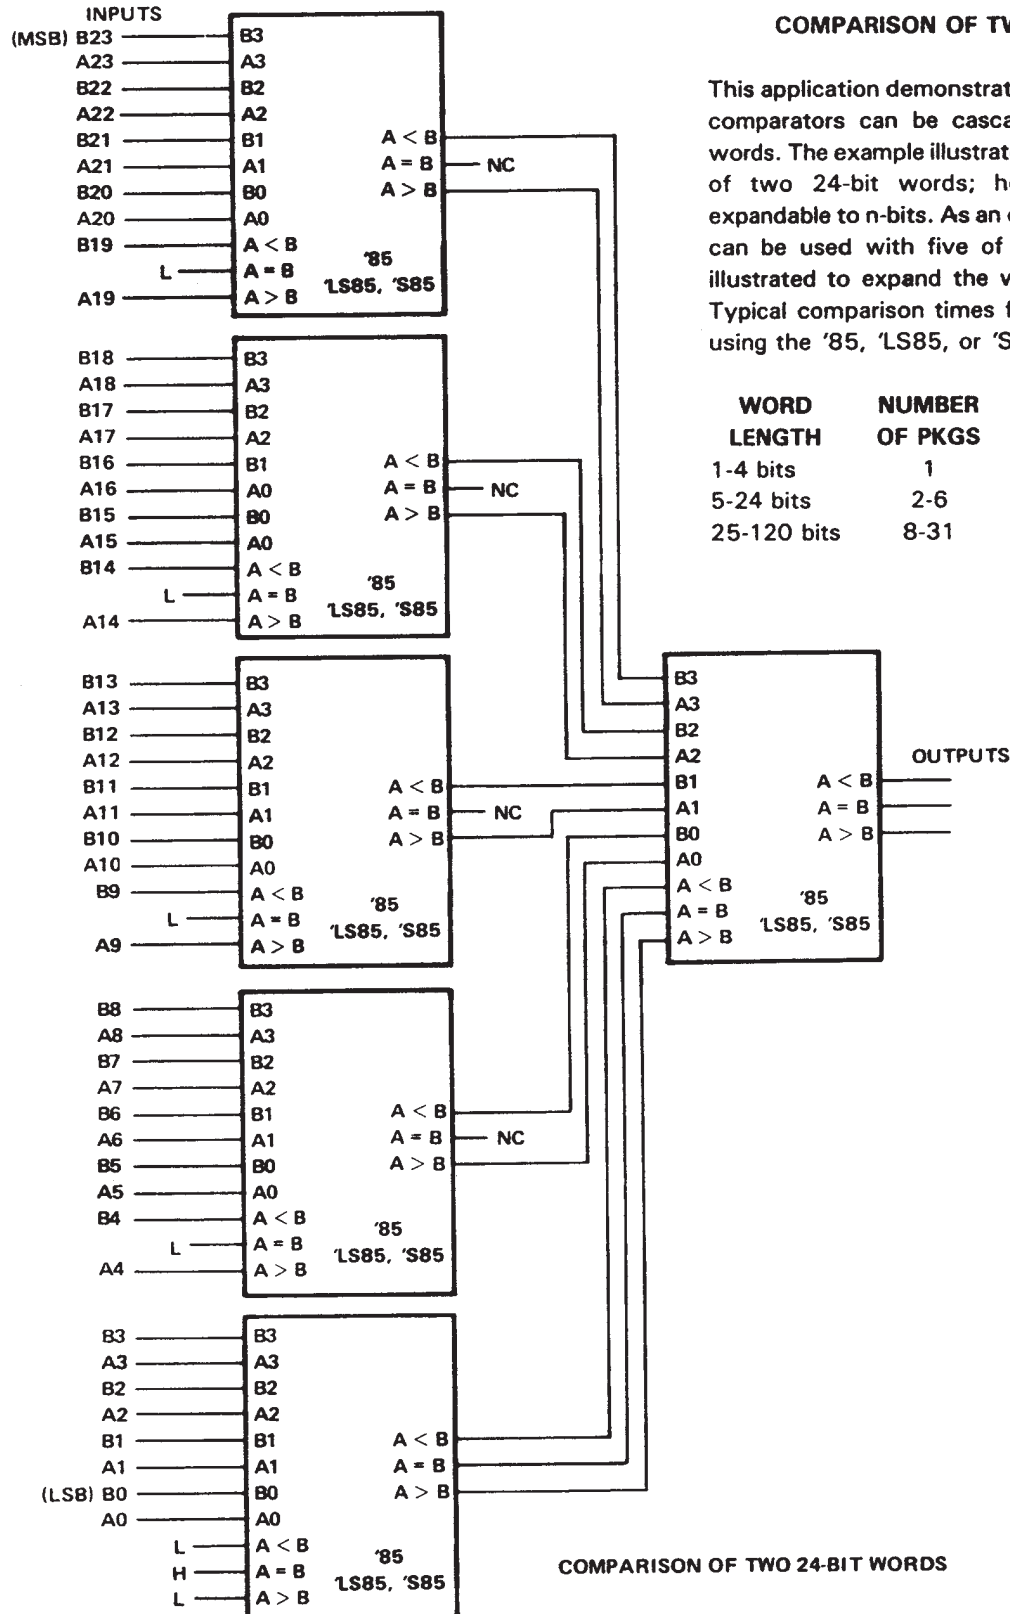


TAPE AND REEL INFORMATION

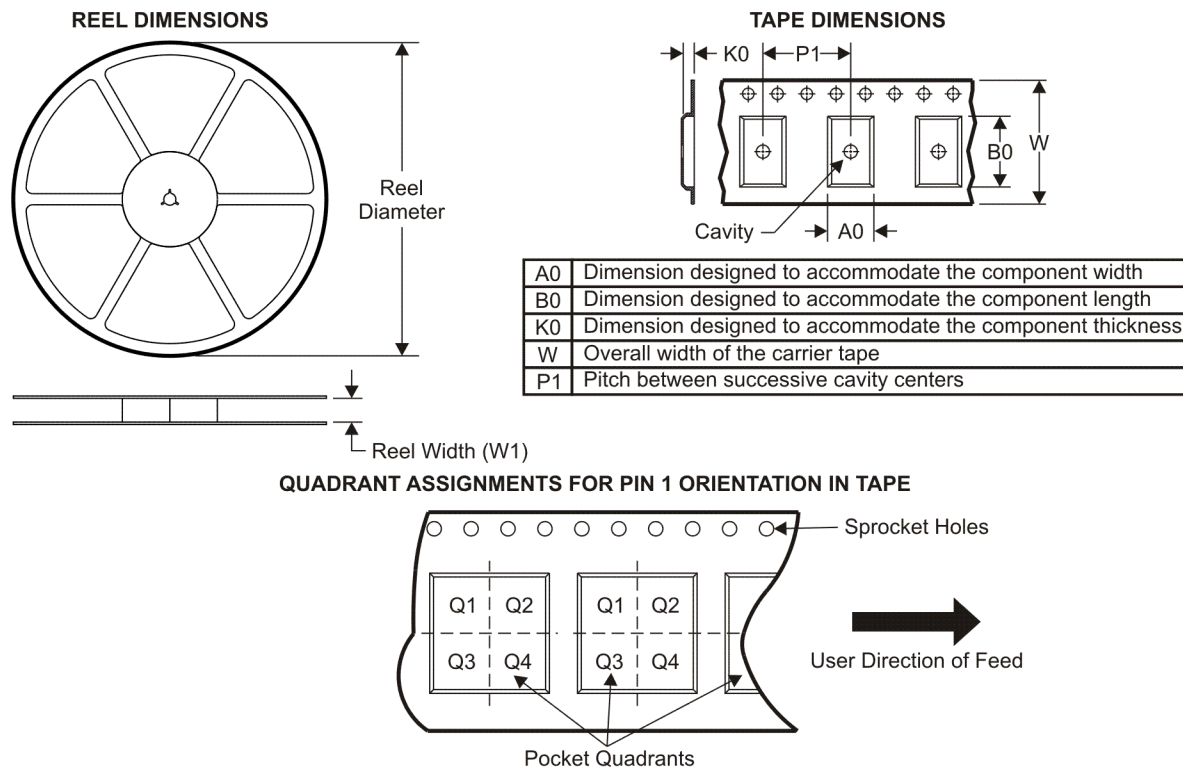

*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LS85DR | SOIC | D | 16 | 2500 | 330.0 | 16.4 | 6.5 | 10.3 | 2.1 | 8.0 | 16.0 | Q1 |
| SN74LS85NSR | SO | NS | 16 | 2000 | 330.0 | 16.4 | 8.2 | 10.5 | 2.5 | 12.0 | 16.0 | Q1 |
| SN74S85NSR | SO | NS | 16 | 2000 | 330.0 | 16.4 | 8.2 | 10.5 | 2.5 | 12.0 | 16.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS

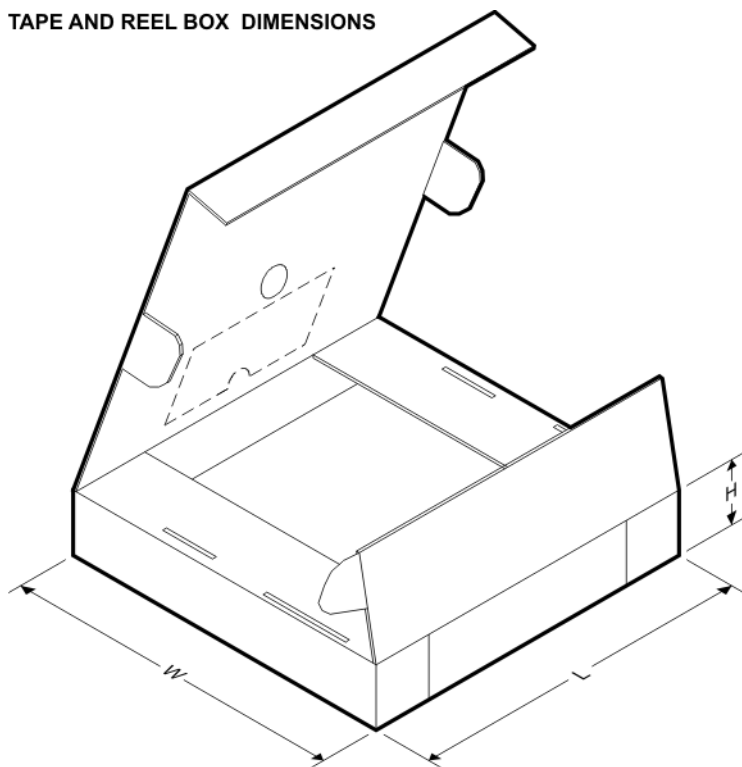

*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LS85DR | SOIC | D | 16 | 2500 | 333.2 | 345.9 | 28.6 |
| SN74LS85NSR | SO | NS | 16 | 2000 | 346.0 | 346.0 | 33.0 |
| SN74S85NSR | SO | NS | 16 | 2000 | 346.0 | 346.0 | 33.0 |

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|--------------------|--|
| Audio | www.ti.com/audio |
| Automotive | www.ti.com/automotive |
| Broadband | www.ti.com/broadband |
| Digital Control | www.ti.com/digitalcontrol |
| Medical | www.ti.com/medical |
| Military | www.ti.com/military |
| Optical Networking | www.ti.com/opticalnetwork |
| Security | www.ti.com/security |
| Telephony | www.ti.com/telephony |
| Video & Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated