



STANDARD TRIAC
T0220-AB

On-State Current

8 Amp

Gate Trigger Current
 $\leq 100 \text{ mA}$
Off-State Voltage

200 V ÷ 800 V

This series of **TRIACs** uses a high performance PNPN technology.

These parts are intended for general purpose AC switching applications with highly inductive loads.

Absolute Maximum Ratings, according to IEC publication No. 134

SYMBOL	PARAMETER	CONDITIONS	Value	Unit
$I_{T(RMS)}$	RMS On-state Current (full sine wave)	All Conduction Angle, $T_C = 95^\circ\text{C}$	8	A
I_{TSM}	Non-repetitive On-State Current	Full Cycle, 60 Hz ($t = 16.7 \text{ ms}$)	84	A
I_{TSM}	Non-repetitive On-State Current	Full Cycle, 50 Hz ($t = 20 \text{ ms}$)	80	A
I^2t	Fusing Current	$t_p = 10 \text{ ms}$, Half Cycle	32	A ² s
I_{GM}	Peak Gate Current	20 μs max. $T_j = 125^\circ\text{C}$	4	A
$P_{G(AV)}$	Average Gate Power Dissipation	$T_j = 125^\circ\text{C}$	1	W
di/dt	Critical rate of rise of on-state current	$I_G = 2 \times I_{GT}$, $t_r \leq 100 \text{ ns}$ $f = 120 \text{ Hz}$, $T_j = 125^\circ\text{C}$	50	A/ μs
T_j	Operating Temperature		(-40 +125)	$^\circ\text{C}$
T_{stg}	Storage Temperature		(-40 +150)	$^\circ\text{C}$
T_{sld}	Soldering Temperature	10s max	260	$^\circ\text{C}$

SYMBOL	PARAMETER	VOLTAGE					Unit
		B	D	M	S	N	
V_{DRM} V_{RRM}	Repetitive Peak Off State Voltage	200	400	600	700	800	V

STANDARD TRIAC


Electrical Characteristics

SYMBOL	PARAMETER	CONDITIONS	Quadrant		SENSITIVITY				Unit
					10	13	18	17	
$I_{GT}^{(1)}$	Gate Trigger Current	$V_D = 12 V_{DC}$, $R_L = 33\Omega$, $T_j = 25^\circ C$	Q1÷Q3 Q4	MAX MAX	25 25	50 75	25 50	50 100	mA mA
V_{GT}	Gate Trigger Voltage	$V_D = 12 V_{DC}$, $R_L = 33\Omega$, $T_j = 25^\circ C$	Q1÷Q4	MAX	1.3				V
V_{GD}	Gate Non Trigger Voltage	$V_D = V_{DRM}$, $R_L = 3.3K\Omega$, $T_j = 125^\circ C$	Q1÷Q4	MIN	0.2				V
$I_H^{(2)}$	Holding Current	$I_T = 100 mA$, Gate open, $T_j = 25^\circ C$		MAX	25	50	25	50	mA
I_L	Latching Current	$I_G = 1.2 I_{GT}$, $T_j = 25^\circ C$	Q1,Q3,Q4 Q2	MAX MAX	40 60	70 80	40 80	70 100	mA
$dV/dt^{(2)}$	Critical Rate of Voltage Rise	$V_D = 0.67 \times V_{DRM}$, Gate open $T_j = 125^\circ C$		MIN	500	1000	700	1000	V/ μs
$(dV/dt)_C^{(2)}$	Critical rise rate of Commu- tating off-state voltage	$(dI/dt)_C = 2.7 A/ms$, $T_j = 125^\circ C$		MIN	3	8	5	10	V/ μs
$V_{TM}^{(2)}$	On-state Voltage	$I_T = 11 Amp$, $t_p = 380 \mu s$, $T_j = 25^\circ C$		MAX	1.6				V
$V_{T(o)}^{(2)}$	Threshold Voltage	$T_j = 125^\circ C$		MAX	0.85				V
$r_d^{(2)}$	Dynamic Resistance	$T_j = 125^\circ C$		MAX	70				m Ω
I_{DRM}/I_{RRM}	Off-State Leakage Current	$V_D = V_{DRM}$, $T_j = 125^\circ C$ $V_R = V_{RRM}$, $T_j = 25^\circ C$		MAX MAX	1 5				mA μA
$R_{th(j-c)}$	Thermal Resistance Junction-Case	for AC 360° conduction angle			1.6				°C/W
$R_{th(j-a)}$	Thermal Resistance Junction- Ambient				60				°C/W

(1) Minimum I_{GT} is guaranted at 5% of I_{GT} max.

(2) For either polarity of electrode MT2 voltage with reference to electrode MT1.

PART NUMBER INFORMATION

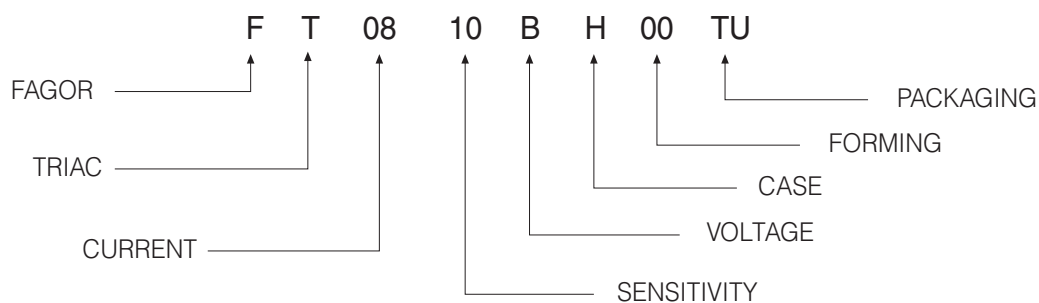

STANDARD TRIAC

Fig. 1: Maximum power dissipation versus RMS on-state current (full cycle)

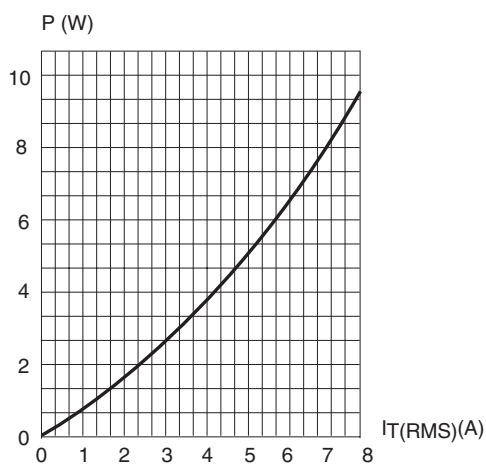


Fig. 2: RMS on-state current versus case temperature (full cycle)

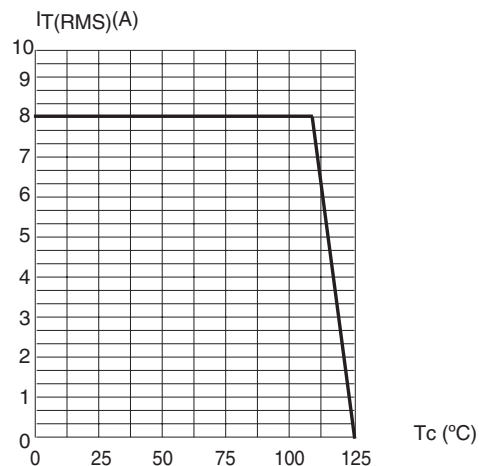


Fig. 3: Relative variation of thermal impedance versus pulse duration

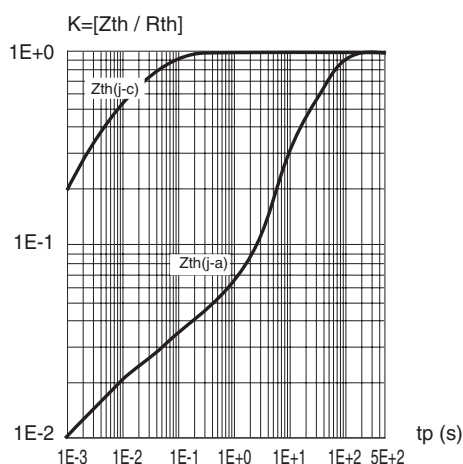


Fig. 4: On-state characteristics (maximum values)

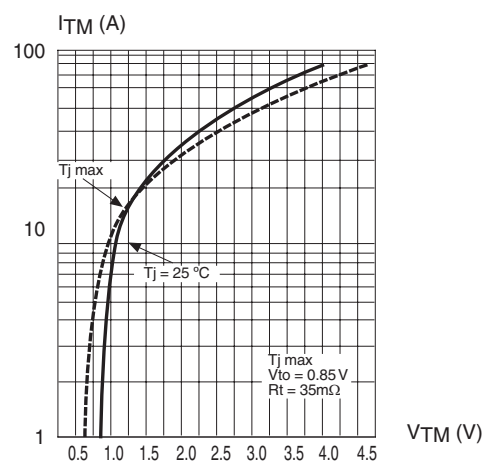


Fig. 5: Surge peak on-state current versus number of cycles


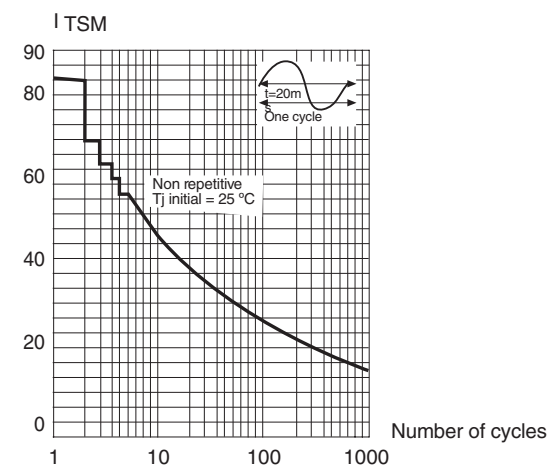


Fig. 6: Non repetitive surge peak on-state current for a sinusoidal pulse with width: $t_p < 10$ ms, and corresponding value of I^2t .

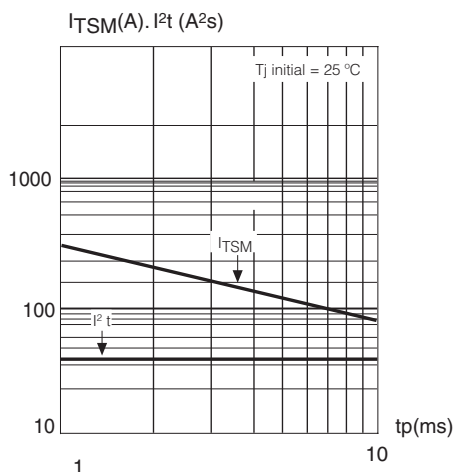

STANDARD TRIAC

Fig. 7: Relative variation of gate trigger current, holding current and latching versus junction temperature (typical values)

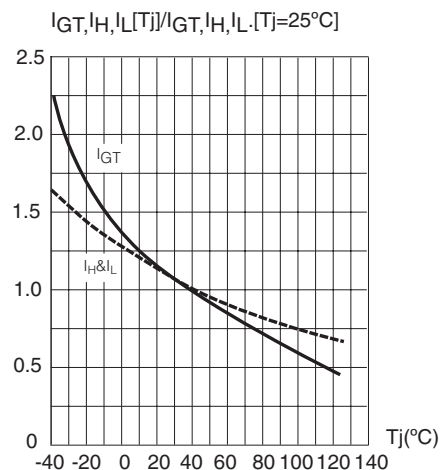


Fig. 8: Relative variation of critical rate of decrease of main current versus junction temperature



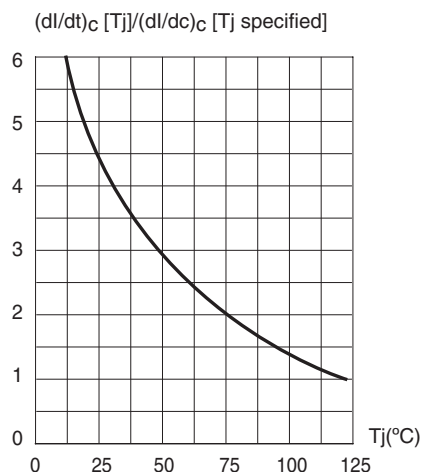


Fig. 9: Relative variation of critical rate of decrease of main current versus

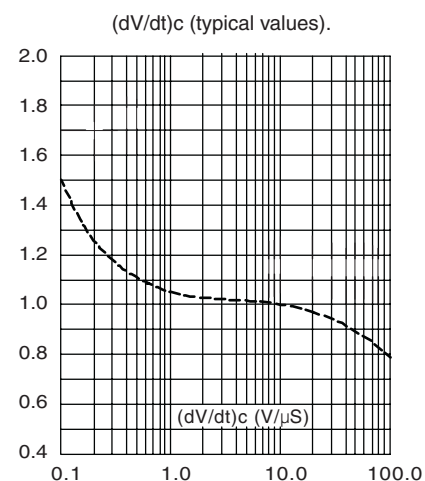

PACKAGE MECHANICAL DATA

TO-220AB

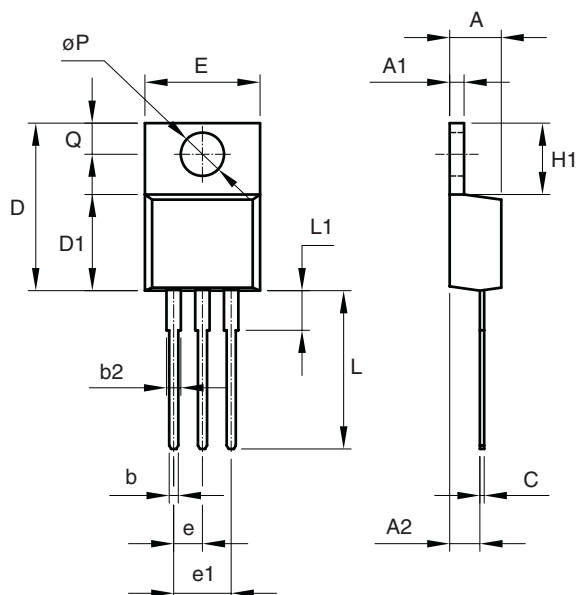

REF.	DIMENSIONS	
	Millimeters	
	Min.	Max.
A	4.47	4.67
A1	1.17	1.37
A2	2.52	2.82
b	0.71	0.91
b2	1.17	1.37
c	0.31	0.53
D	14.65	15.35
D1	8.50	8.90
E	10.01	10.36
e	2.51	2.57
e1	4.98	5.18
H1	6.15	6.45
L	13.40	13.96
L1	3.56	3.96
P	3.735	3.935
Q	2.59	2.89

NOTE: CONFORMS TO JEDEC OUTLINE TO-220AB

Mounting Torque

0.5 N.m