


Microswitch Simulated Lever Roller Type

V3 microswitch
Simulated roller actuator
250V AC contact voltage
15A contact current
NO-NC contact
Solder lug terminal
1,000,000 ops operating life
2.5mm pre-travel
1.2mm differential movement
7g weight



High quality standard size
Connection may be made by a
6.35mm (1/4in.) connector or by
soldering
Compact and precise operation
Phenolic resin push button
Stainless steel lever

Type	V-0 FL13-0			
Operation				
OF max.	220g	150	100	40
RF min.	28g	14	10	5
PT max.	2.5mm			
OT min.	1.6mm			
MD max.	1.2mm			
OP	18.2 ±1.2mm			

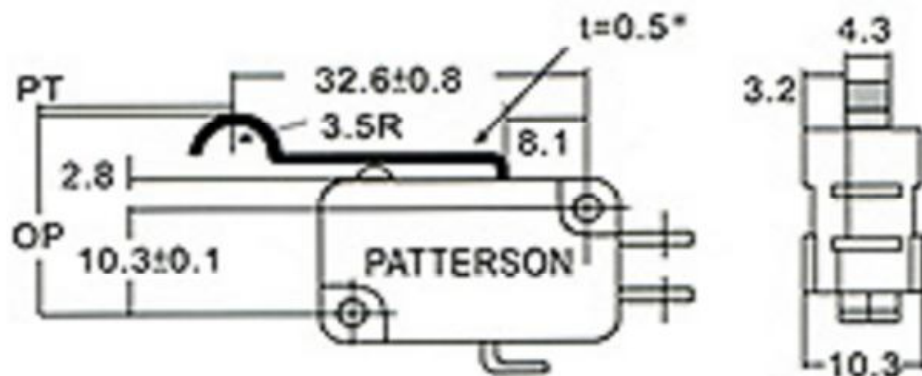


ORDERING INFORMATION

Rated Current	Actuators	Terminals
15 : 15A	FL	A:
12 : 12A	FL11	B:
10 : 10A	FL111	A2:
5 : 5A	FL12	C1: #187
1 : 1A	FL13	C2: #250
	FL22	

TERMINALS

Solder terminal(-A) Screw terminal(-B) Short solder terminal(-A2) Quick connect terminal(C1,C2)
#187 #250 series

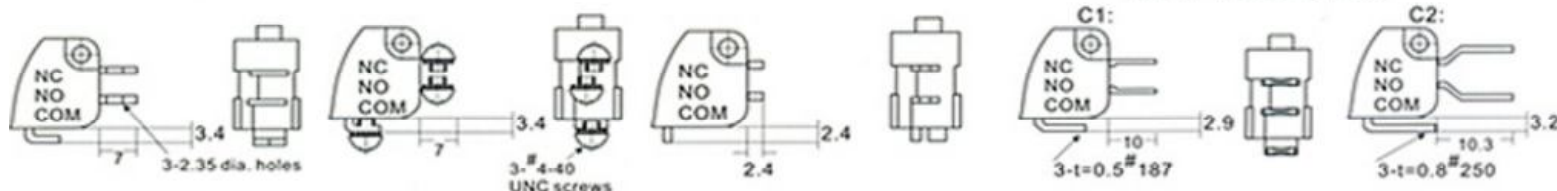

CONTACT CONFIGURATION

