

SPECIFICATIONS

1.HOUSING
Material : ABS, UL 94V-2, NO Poison
Color : Ivory

2.ELECTRONIC WIRE SET
2-1.UL 1061 ELECTRONIC WIRE
Conductor : Bare copper wire Ø0.48mm (AWG 26)
Insulation : SR-PVC, Ø 0.97±0.10mm
Insulation Color : See drawing






2-2.O TYPE TERMINAL
Material : Bronze

2-3.WIRE TERMINAL
Material : Bronze

2-4.GOLD WIRE
Contact : Phosphor Bronze ,3u" Gold
over Nickel under plated


1.SCREW
Material : Iron
Plating:Nickel

4. GREEN
3. RED
5. YELLOW
2. BLACK
6. BLUE
1. WHITE

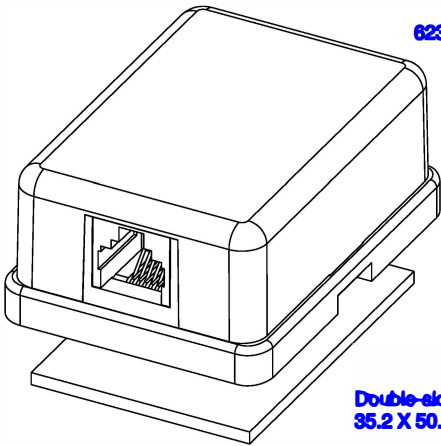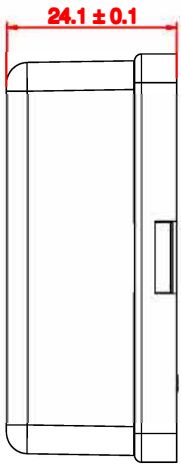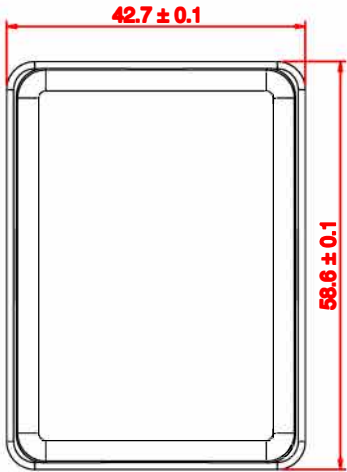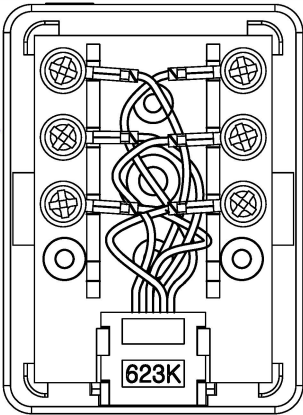

623K Jack - Surface Mount

Double-sided adhesive foam cotton
35.2 X 50.2 mm t=2.0mm



ITEM NO.	DESCRIPTION	REMARK
----------	-------------	--------

除特別註明外 UNLESS OTHERWISE SPECIFIED		日期 DATE	2026/01/20	夏林電子有限公司	
單位 UNIT: cm	比例 SCALE FREE	製圖 DRAWING	BEN	名稱 TITLE	623K Jack - Surface Mount
長度 LENGTH	公差 TOLERANCES	設計 DESIGN	EMERSON	機種 MODEL NO.	623K 6P6C 接線盒 3u"金針
0.5-6	±0.05	核對 CHECK	EMERSON	料號 ITEM NO.	X98353B
6-120	±0.10	校發 APPROVED	EMERSON	圖號 DRAWING NO.	HL-623KBX-86B-3-IV.DWG
120-315	±0.20			版本	A
315-1000	±0.30				
角度 ANGLES 0°-30°					
孔徑 HOLE DIAMETER					
0.5-30	±0.10				
30-100	±0.20				