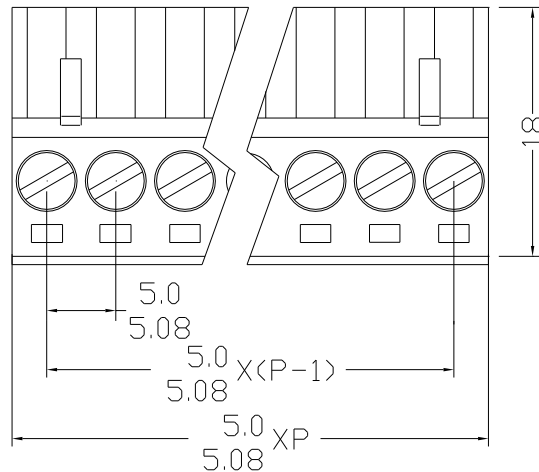



300V 12A 2.5mm²

Poles: 2P/3P/4P/5P/6P/7P
8P/9P/10P/11P/12P/
13P/14P/15P/16P/17P
18P/19P/20P/21P/22P
23P/24P

Pitch: 5.0mm 5.08mm

Materials

Housing: Polyamide 6.6, Green
Clamp: Phosphor Bronze, 0.4t, Nickel Plated.
Wire Cage: Steel, 0.7t, Zinc Plated.
Screw: M2.5, Steel, Zinc Plated.

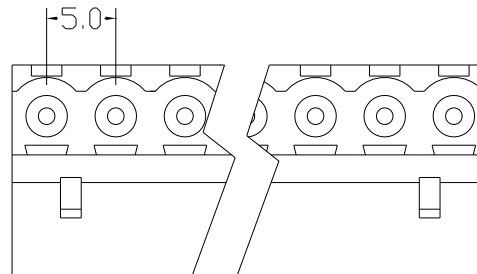

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	x. ±0.2	x." ±2°
		XY2500F-A XY2500F-B		.x ±0.1	.x" ±1°
		产品图	页序/Sheet	.xx ±0.05	.xx" ±0.5°
		备注/Remark		.xxx ±0.01	
				单位/Units: mm	