


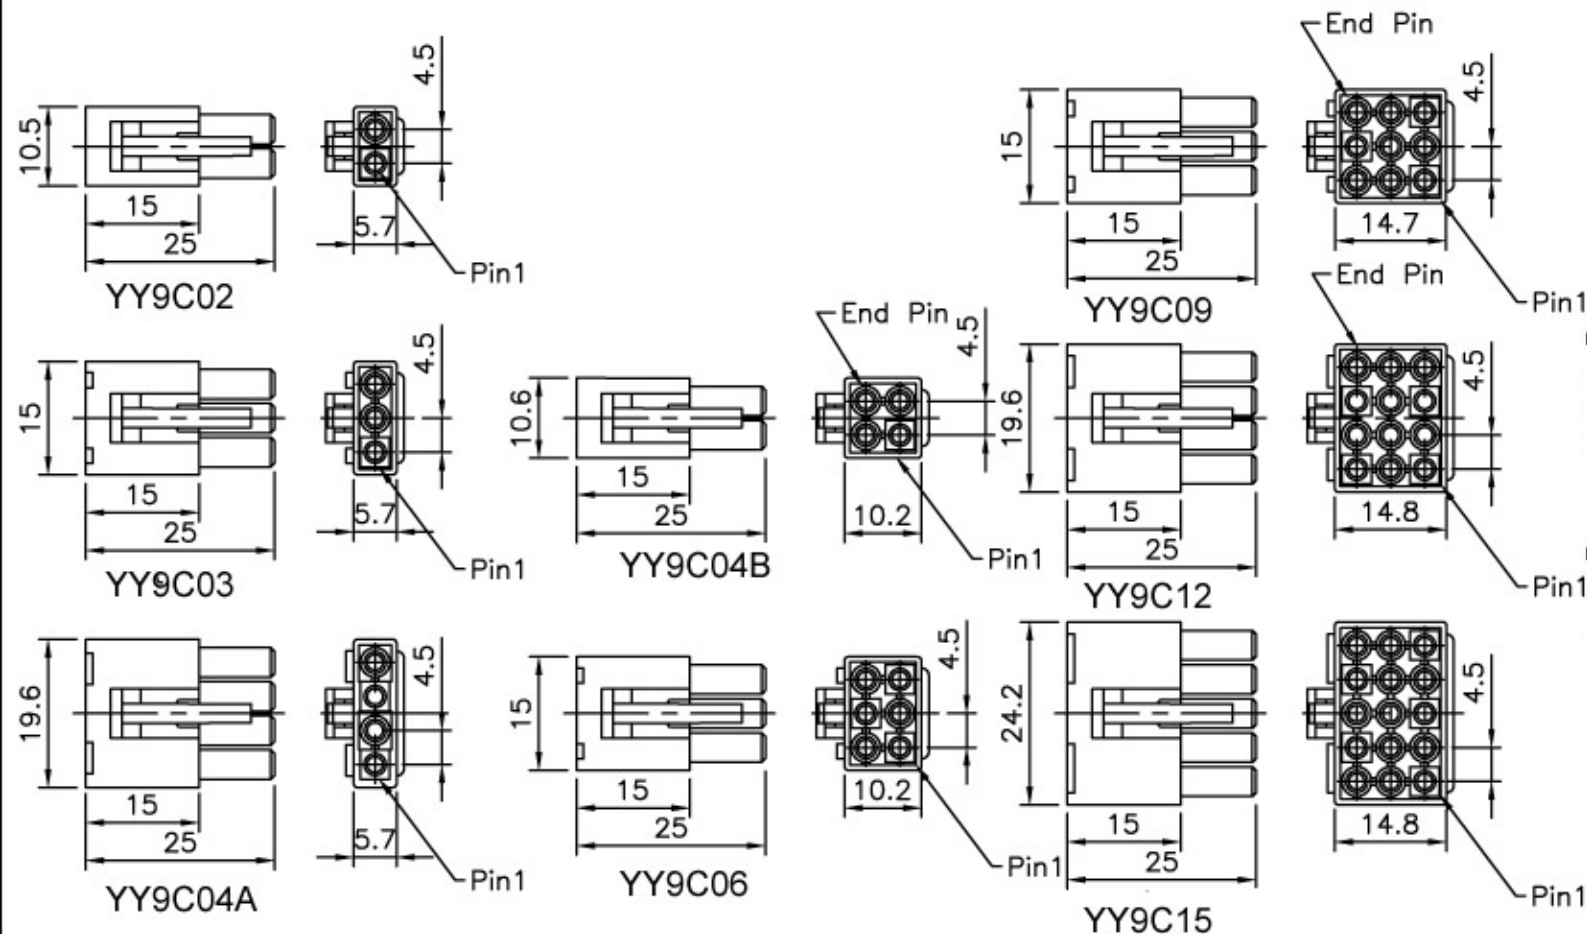

■ SPECIFICATIONS

- Voltage Rating : 300V AC/DC
- Current Rating : 6A AC/DC
- Withstanding Voltage : 1500V AC/minute
- Insulation Resistance : 1000M Ω min
- Temperature Range : -25 $^{\circ}$ C to +85 $^{\circ}$ C

■ HOUSING

- Poles : 2, 3, 4, 6, 9, 12, 15
- Material : Nylon 66 UL94V-0
- Q' ty : 1000 pcs./Bag

SHALLIN ELECTRONICS CO., LTD.		APPROVED BY	SCALE	UNIT	TOLERANCE		LTR	REVISION RECORD	DATE	LTR	REVISION RECORD	DATE
		林陳鏞	1:1	mm	.0	± 0.3	ECR	RoHS Compliant	07/01/04			
PART NO		CHECKED BY	PROJ	VER NO.	.00	± 0.2						
				a1	.000	± 0.1						
YY9Cxx		DRAWN BY	DATE	SIZE	ALL	$\pm$				CUSTOMER		
		余秀麗	2005/05/15	A4	ANGLE					Conforms to The RoHS Instruction		
01.3mm Power Connectors Housing					0 $^{\circ}$	$\pm$						
					.0 $^{\circ}$	$\pm$						