





DEGSON ELECTRONICS CO., LTD.

Product Specification

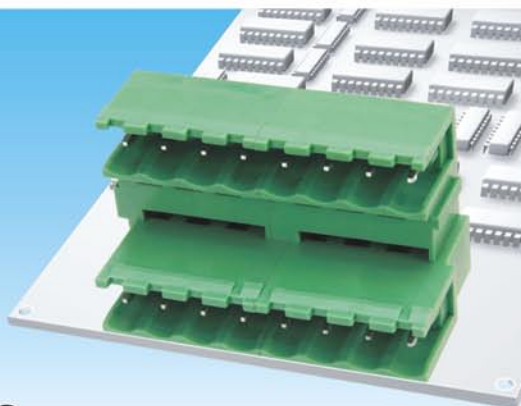

2EDGRT-5.0
2EDGRT-5.08

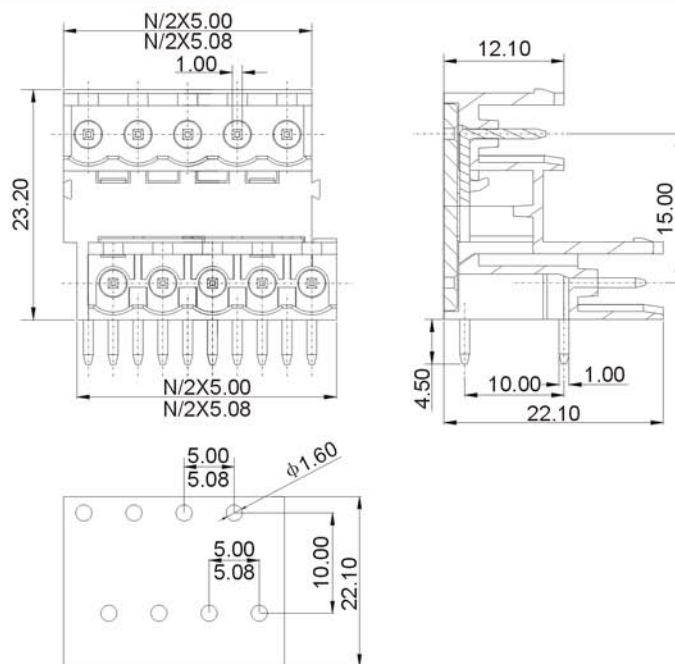

PCB LAYOUT

Material

Pin header:	Brass, Tin plated
Housing :	PA66, UL94V-0

Electrical

Rated voltage :	300V
Rated current :	15A
Contact resistance :	20m Ω
Insulation resistance :	5000M Ω /DC1000V
Withstanding voltage:	AC2000V/1Min

Mechanical

Temp.Range :	-40°C~+105°C
--------------	--------------

HOW TO ORDER:

	-		P-	1		-	<table><tr><td>X</td><td>X</td><td>X</td></tr><tr><td colspan="3">Customer Request</td></tr></table>	X	X	X	Customer Request				
X	X	X													
Customer Request															
Series No.		No of Pole			Color										
					<table><tr><td>1 Gray</td><td>4 Green</td><td>7 Trans- parent</td></tr><tr><td>2 Blue</td><td>5 Orange</td><td>8 Yellow</td></tr><tr><td>3 Black</td><td>6 Red</td><td>9 White</td></tr></table>	1 Gray	4 Green	7 Trans- parent	2 Blue	5 Orange	8 Yellow	3 Black	6 Red	9 White	
1 Gray	4 Green	7 Trans- parent													
2 Blue	5 Orange	8 Yellow													
3 Black	6 Red	9 White													



DEGSON ELECTRONICS CO., LTD.

NAME

2EDGRT-5.0
2EDGRT-5.08