

# BD707/709/711 BD708/712

# COMPLEMENTARY SILICON POWER TRANSISTORS


■ COMPLEMENTARY PNP - NPN DEVICES


#### **APPLICATION**

 LINEAR AND SWITCHING INDUSTRIAL EQUIPMENT

#### **DESCRIPTION**

The BD707, BD709 and BD711 are silicon Epitaxial-Base NPN power transistors in Jedec TO-220 plastic package. They are intented for use in power linear and switching applications. The BD707 and BD711 complementary PNP types are BD708 and BD712 respectively.

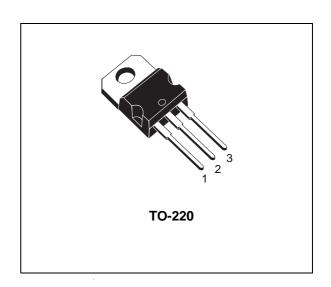

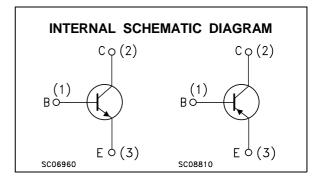

### **ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter		Value			Unit
		NPN	BD707	BD709	BD711	1
		PNP	BD708		BD712	
V <sub>CBO</sub>	Collector-Base Voltage (I <sub>E</sub> = 0)		60	80	100	V
$V_{CER}$	Collector-Emitter Voltage (V <sub>BE</sub> = 0)		60	80	100	V
$V_{CEO}$	Collector-Emitter Voltage (I <sub>B</sub> = 0)		60	80	100	V
$V_{EBO}$	Emitter-Base Voltage (I <sub>C</sub> = 0)			5		V
Ic	Collector Current			12		Α
I <sub>CM</sub>	Collector Peak Current		18			Α
Ι <sub>Β</sub>	Base Current	5		Α		
P <sub>tot</sub>	Total Dissipation at T <sub>c</sub> ≤ 25 °C			W		
T <sub>stg</sub>	Storage Temperature		-65 to 150			°C
Tj	Max. Operating Junction Temperature			°C		

For PNP types voltage and current values are negative

September 1999 1/6

### THERMAL DATA

R <sub>thj-case</sub>	Thermal Resistance Junction-case	Max	1.67	°C/W
R <sub>thj-case</sub>	Thermal Resistance Junction-ambient	Max	70	°C/W


## **ELECTRICAL CHARACTERISTICS** ( $T_{case} = 25$ $^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Тур.	Max.	Unit
I <sub>CBO</sub>	Collector Cut-off Current (I <sub>E</sub> = 0)	for BD707/708 for BD709 for BD711/712 T <sub>case</sub> = 150 °C for BD707/708 for BD709 for BD711/712	$V_{CB} = 60 \text{ V}$ $V_{CB} = 80 \text{ V}$ $V_{CB} = 100 \text{ V}$ $V_{CB} = 60 \text{ V}$ $V_{CB} = 80 \text{ V}$ $V_{CB} = 100 \text{ V}$			100 100 100 1 1 1	μΑ μΑ μΑ mA mA
I <sub>CEO</sub>	Collector Cut-off Current (I <sub>B</sub> = 0)	for BD707/708 for BD709 for BD711/712	V <sub>CE</sub> = 30 V V <sub>CE</sub> = 40 V V <sub>CE</sub> = 50 V			100 100 100	mA mA mA
I <sub>EBO</sub>	Emitter Cut-off Current (I <sub>C</sub> = 0)	V <sub>EB</sub> = 5 V				1	mA
V <sub>CEO(sus)</sub> *	Collector-Emitter Sustaining Voltage (I <sub>B</sub> = 0)	I <sub>C</sub> = 100 mA for <b>BD707/708</b> for <b>BD709</b> for <b>BD711/712</b>		60 80 100			V V
V <sub>CE(sat)</sub> *	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 4 A	I <sub>B</sub> = 0.4 A			1	V
V <sub>CEK</sub> *	Knee Voltage	I <sub>C</sub> = 3 A	I <sub>B</sub> = **			0.4	V
V <sub>BE</sub> *	Base-Emitter Voltage	I <sub>C</sub> = 4 A	V <sub>CE</sub> = 4 V			1.5	V
h <sub>FE</sub> *	DC Current Gain	I <sub>C</sub> = 0.5 A I <sub>C</sub> = 2 A I <sub>C</sub> = 4 A I <sub>C</sub> = 10 A	V <sub>CE</sub> = 2 V V <sub>CE</sub> = 2 V for <b>BD707/708</b> for <b>BD709</b> V <sub>CE</sub> = 4 V V <sub>CE</sub> = 4 V for <b>BD707/708</b> for <b>BD709</b>	40 30 30 15	120 10 8	400 150	
			for <b>BD711/712</b>		8		
f <sub>T</sub>	Transition frequency	$I_C = 300 \text{ mA}$	$V_{CE} = 3 V$	3			MHz


**47**/ 2/6

<sup>\*</sup> Pulsed: Pulse duration =  $300 \,\mu\text{s}$ , duty cycle 1.5 % \*\* Value for which  $I_C$  =  $3.3 \,\text{A}$  at  $V_{CE}$  = 2V. For PNP types voltage and current values are negative.


### Safe Operating Areas

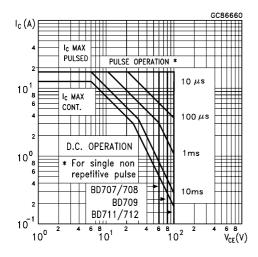


### DC Current Gain(NPN type)

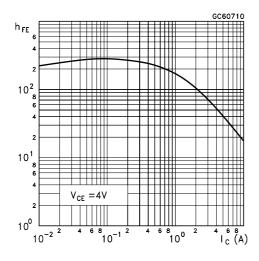


DC Transconductance(NPN type)

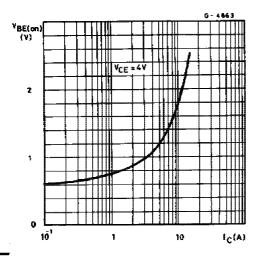


### **Derating Curve**

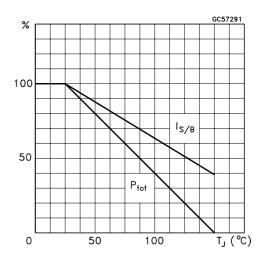

DC Current Gain(PNP type)

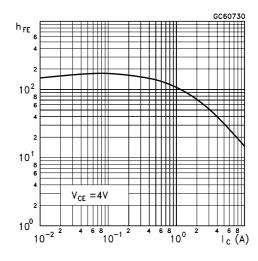


DC Transconductance(PNP type)

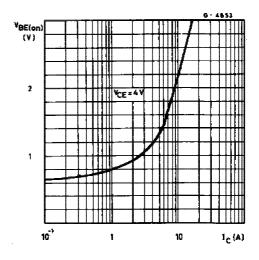


47/

Collector-Emitter Saturation Voltage (NPN type)

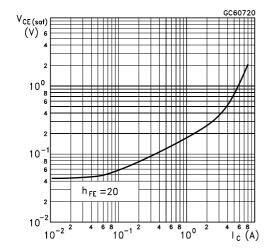


Base-Emitter Saturation Voltage (NPN type)

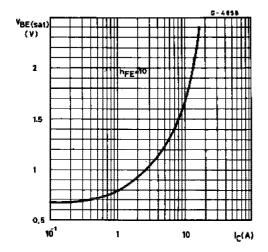


Transition Frequency (NPN type)


4/6




Collector-Emitter Saturation Voltage (PNP type)

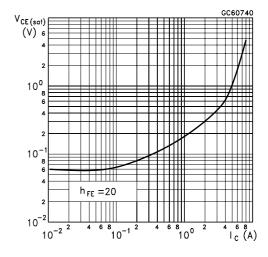

Base-Emitter Saturation Voltage (PNP type)

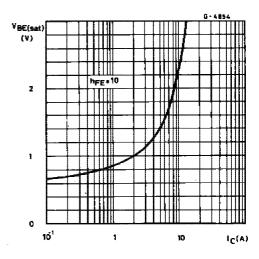


Transition Frequency (PNP type)



## **TO-220 MECHANICAL DATA**

DIM.	mm			inch			
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
А	4.40		4.60	0.173		0.181	
С	1.23		1.32	0.048		0.051	
D	2.40		2.72	0.094		0.107	
D1		1.27			0.050		
Е	0.49		0.70	0.019		0.027	
F	0.61		0.88	0.024		0.034	
F1	1.14		1.70	0.044		0.067	
F2	1.14		1.70	0.044		0.067	
G	4.95		5.15	0.194		0.203	
G1	2.4		2.7	0.094		0.106	
H2	10.0		10.40	0.393		0.409	
L2		16.4			0.645		
L4	13.0		14.0	0.511		0.551	
L5	2.65		2.95	0.104		0.116	
L6	15.25		15.75	0.600		0.620	
L7	6.2		6.6	0.244		0.260	
L9	3.5		3.93	0.137		0.154	
DIA.	3.75		3.85	0.147		0.151	

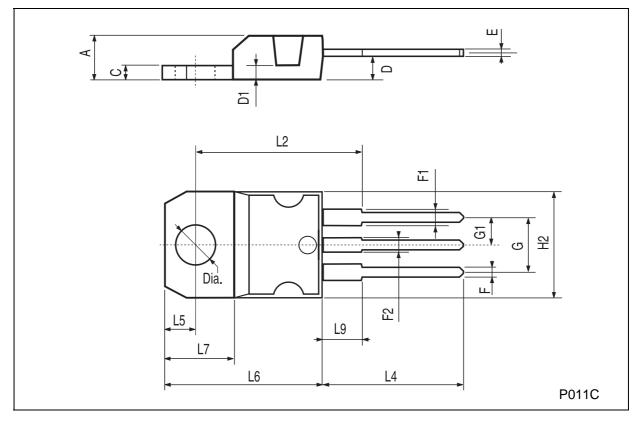

5/6

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1999 STMicroelectronics – Printed in Italy – All Rights Reserved STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

http://www.st.com

6/6