# HFD27

## SUBMINIATURE DIP RELAY



File No.:E133481



File No.:R50075362



(CQC)

File No.:CQC09002033393

## Features

- 2 Form C configuration
- High switching capacity: 125VA/60W
- Matching 16 pin IC socket
- Bifurcated contacts
- Epoxy sealed for automatic-wave soldering and cleaning
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.2 x 10.0 x 11.5) mm

CONTACT DATA	
Contact arrangement	2C
Contact resistance	50mΩ max. (at 0.1A 6VDC)
Contact material	AgNi + Au plated
Contact rating (Res. load)	1A 125VAC, 2A 30VDC
Max. switching voltage	240VAC / 120VDC
Max. switching current	2A
Max. switching power	125VA / 60W
Min. applicable load 1)	10mV 10μA
Mechanical endurance	1x10 <sup>8</sup> OPS
Electrical endurance	1 x 10 <sup>5</sup> ops (at 2A 30VDC)

**Notes:** 1) Min. applicable load is reference value. Please perform the confirmation test with the actual load before production since reference value may change according to switching frequencies, environmental conditions and expected contact resistance and reliability.

CHAR	ACTER	ISTICS	
Insulation resistance		1000MΩ (at 500VDC	
Dielectric	Between	coil & contacts	1500VAC 1min
	Potygon	anan contacta	M, S type: 1000VAC 1min
	Between open contacts		H type: 750VAC 1min
Operate time (at nomi. volt.)		7ms max.	
Release time (at nomi. volt.)		4ms max.	
Ambient temperature		-40°C to 85°C	
Humidity		5% to 85% RH	
Vibration resistance		10Hz to 55Hz 1.5mm DA	
Shock resistance		Functional	196m/s²
		Destructive	980m/s²
Termination		PCB (DIP)	
Unit weight		Approx. 5g	
Construction		Plastic sealed	

Notes: 1) The data shown above are initial values.
2) UL insulation system: Class A

COIL
Coil power

Standard: Approx. 280mW to 580mW Sensitive: Approx. 200mW High Sensitive: Approx. 150mW 65K max.

## **COIL DATA**

Temperature rise

at 23°C

#### Standard type (280mW to 580mW)

otaniaana typo (200mitt to 000mitt)					
Coil Code	Coil Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
003-M	3	2.25	0.3	4.5	30 x (1±10%)
005-M	5	3.75	0.5	8.0	90 x (1±10%)
006-M	6	4.50	0.6	10.0	130 x (1±10%)
009-M	9	6.80	0.9	14.5	280 x (1±10%)
012-M	12	9.00	1.2	18.5	450 x (1±10%)
015-M	15	11.3	1.5	22.0	625 x (1±10%)
024-M	24	18.0	2.4	35.5	1600 x (1±10%)
048-M	48	36.0	4.8	56.0	4000 x (1±10%)

## Sensitive type (200mW)

Coil Code	Coil Voltage VDC	Voltage	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC	Coil Resistance Ω
003-S	3	2.25	0.3	6	45 x (1±10%)
005-S	5	3.75	0.5	10	125 x (1±10%)
006-S	6	4.50	0.6	12	180 x (1±10%)
009-S	9	6.80	0.9	18	405 x (1±10%)
012-S	12	9.00	1.2	24	720 x (1±10%)
015-S	15	11.3	1.5	30	1125 x (1±10%)
024-S	24	18.0	2.4	48	2880 x (1±10%)



## COIL DATA at 23°C

## High sensitive type (150mW)

Coil Code	Coil Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
003-H	3	2.4	0.3	7.0	60 x (1±10%)
005-H	5	4.0	0.5	11.5	167 x (1±10%)
006-H	6	4.8	0.6	13.8	240 x (1±10%)
009-H	9	7.2	0.9	20.8	540 x (1±10%)
012-H	12	9.6	1.2	27.7	960 x (1±10%)
015-H	15	12.0	1.5	34.6	1500 x (1±10%)
024-H	24	19.2	2.4	55.2	3840 x (1±10%)

Notes: 1) When user's requirements can't be found in the above table, special order allowed.

## **SAFETY APPROVAL RATINGS**

UL/CUL	2A 30VDC
	1A 125VAC
ΤÜV	2A 30VDC
	1A 125VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.

## **ORDERING INFORMATION**

HFD27 / 012

-S



Type

**Coil voltage** 3, 5, 6, 9, 12, 15, 24, 48VDC 1)

Coil power

M: Standard (280mW to 580mW) S: Sensitive (200mW)


H: High sensitive (150mW)

**Customer special code** 

Notes: 1) 48VDC coil voltage is only for standard version.

## **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**

Unit: mm

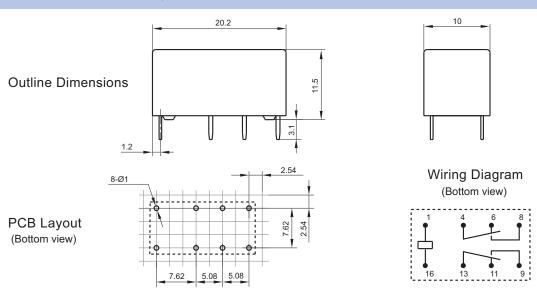


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.

- 2) The tolerance without indicating for PCB layout  $\,$  is always  $\pm 0.1 mm$ .
- 3) The width of the gridding is 2.54mm.


<sup>2)</sup> In case 5V of transistor drive circuit, it is recommended to use 4.5V type relay, and 3V to use 2.4V type relay.

## CHARACTERISTIC CURVES

#### MAXIMUM SWITCHING POWER



#### **ENDURANCE CURVE**



#### Notice

- 1) To avoid using relays under strong magnetic field which will change the parameters of relays such as pick-up voltage and drop-out voltage.
- 2) The relay may be damaged because of falling or when shocking conditions exceed the requirement.
- 3) Regarding the plastic sealed relay, we should leave it cooling naturally untill below 40°C after welding, then clean it and deal with coating, remarkably the temperature of solvents should also be controlled below 40°C. Please avoid cleaning the relay by ultrasonic, avoid using the solvents like gasoline, Freon, and so on, which would affect the configuration of relay or influence the environment.
- 4) Energizing coil with rated voltage is basic for normal operation of a relay, please make sure the energized voltage to relay coil have reached the rated voltage. Regarding latching relay, in order to maintain the "set" or "reset" status, impulse width of the rated voltage applied to coil should be more than 5 times of "set" or "reset" time.
- 5) About preferable condition of operation, storage and transportation, please refer to "Explanation to terminology and guidetines of relay".

#### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.