





- Universal AC input / Full range (up to 305VAC)
- · Built-in active PFC function
- High efficiency up to 94%
- · Protections: Short circuit / Overload / Over voltage / Over temperature
- · Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)















HLG-185H-12 A

Blank: IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or potentiometer.


D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SDECIEIC ATION


SPECIFIC	ATION		1					1						
MODEL			HLG-185H-12	HLG-185H-15	HLG-185H-20	HLG-185H-24	HLG-185H-30	HLG-185H-36	HLG-185H-42	HLG-185H-48	HLG-185H-54			
	DC VOLTAGE		12V	15V	20V	24V	30V	36V	42V	48V	54V			
ОИТРИТ	CONSTANT CURRENT REGION Note.4		6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V			
	RATED CURRENT		13A	11.5A	9.3A	7.8A	6.2A	5.2A	4.4A	3.9A	3.45A			
	RATED POWER	RATED POWER		172W	186W	187.2W	186W	187.2W	184.8W	187.2W	186.3W			
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p			
	VOLTAGE ADJ. RA	ANGE Note.6	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V			
	CURRENT ADJ. RANGE		Can be adjusted by internal potentiometer or through output cable											
	CORRENT ADS. RANGE		6.5 ~ 13A	5.75 ~ 11.5A		3.9 ~ 7.8A	3.1 ~ 6.2A	2.6 ~ 5.2A	2.2 ~ 4.4A	1.95 ~ 3.9A	1.72 ~ 3.45A			
	VOLTAGE TOLERA		±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION		±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME		2500ms, 80m			/AC; B type 2	2500ms, 200ms	s at 95% load	230VAC / 115	VAC				
	HOLD UP TIME (Typ.)		16ms at full lo											
	VOLTAGE RANGE		90 ~ 305VAC	127 ~ 43	1VDC									
	FREQUENCY RANGE		47 ~ 63Hz											
INPUT	POWER FACTOR (Typ.)							T	ver Factor Char		T .			
	EFFICIENCY (Typ.		91.5%	92%	93%	93.5%	93.5%	93.5%	94%	94%	94%			
	AC CURRENT	12V		1.8A / 115VAC										
	(Тур.)	15V ~ 54V	2.1A / 115VAC											
	INRUSH CURRENT (Typ.)		COLD START 75A/230VAC											
	LEAKAGE CURRENT		<0.75mA/277VAC											
	OVER CURRENT Note.4													
			Protection type: Constant current limiting, recovers automatically after fault condition is removed Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT			,					47 501/	E4 001/	FO 051/			
PROTECTION	OVER VOLTAGE		14 ~ 17V 18 ~ 21V 23 ~ 27V 28 ~ 34V 34 ~ 38V 41 ~ 46V 47 ~ 53V 54 ~ 60V 59 ~ 65V											
	OVER TEMPERATURE		Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery											
			100°C ±10°C (RTH2)											
			Protection type: Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.		-40 ~ +70°C (Refer to "Derating Curve") 20 ~ 95% RH non-condensing											
FUUDOUMENT	WORKING HUMIDITY		· ·											
ENVIRONMENT	STORAGE TEMP., HUMIDITY		-40 ~ +80°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT		±0.03%/°C (0~50°C)											
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
	WITHSTAND VOLT		UL8750, EN61347-1, EN61347-2-13 independent, J61347-1, J61347-2-13, IP65 or IP67 approved; Design refer to UL60950-1, TUV EN60950-1											
SAFETY &			I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC											
EMC	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load); EN61000-3-3											
	EMC EMISSION													
	MTBF		Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, heavy industry level (surge 4KV), criteria A											
OTHERS			192.2Khrs min. MIL-HDBK-217F (25°C)											
	DIMENSION		228*68*38.8mm (L*W*H)											
	PACKING		1.15Kg; 12pcs/14.8Kg/0.74CUFT											
NOTE	Ripple & noise Tolerance : incl Constant currer reconfirm speci	are measure ludes set up nt operation ial electrical	ly mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. dd at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation. region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please requirements for some specific system design. Ider low input voltages. Please check the static characteristics for more details.											

- 5. Derating may be needed under low input voltages. Please check the static characteristics for more details.
- 6. Type A only
- 7. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.
- Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
 The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 10. Refer to warranty statement.




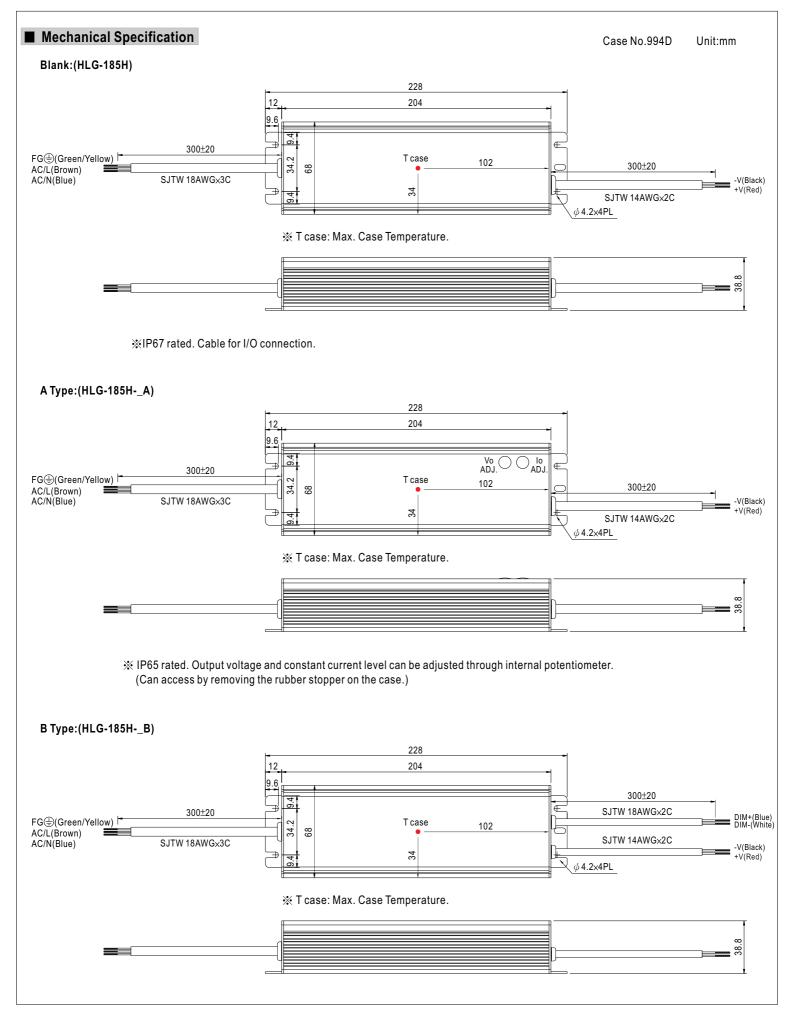



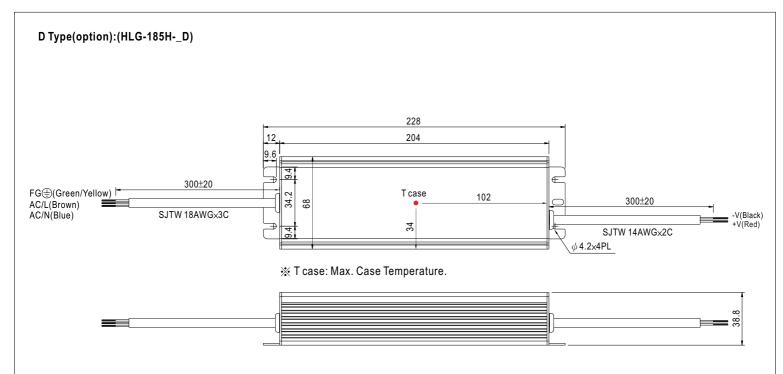


× IP67 rated. Timer dimming function, contact MEAN WELL for details.

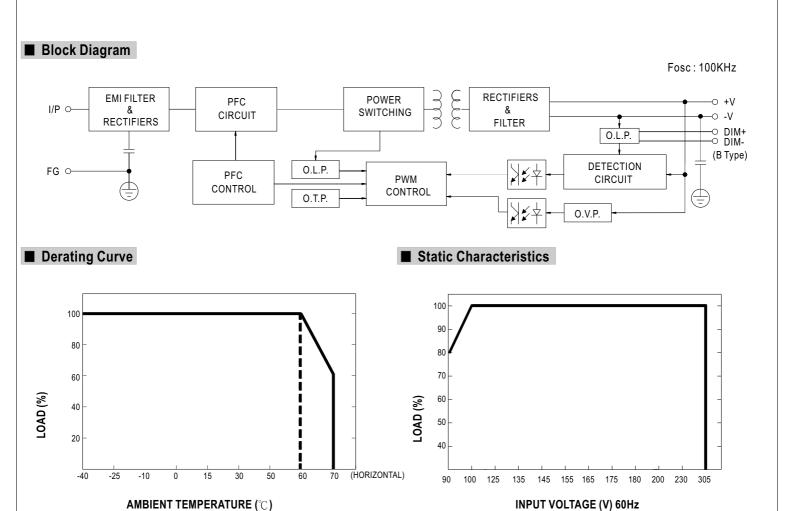




■ Power Factor Characteristic

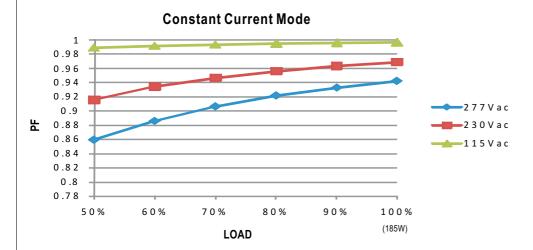

■ EFFICIENCY vs LOAD (48V Model)

HLG-185H series possess superior working efficiency that up to 94% can be reached in field applications.

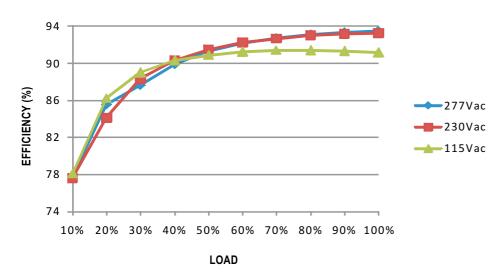


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.


Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

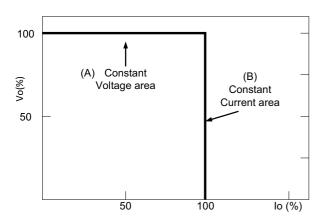

Typical LED power supply I-V curve



■ DIMMING OPERATION

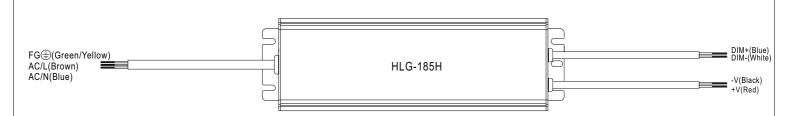

- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance value	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90ΚΩ	100K Ω	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

※ 10V PWM signal for output current adjustment (Typical): Frequency range :100HZ ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

Dimming connection diagram for turning the lighting fixture ON/OFF:

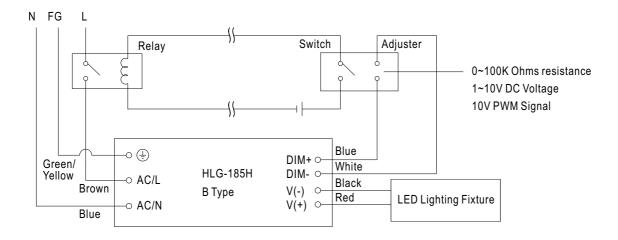

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1.Output constant current level can be adjusted through output cable by connecting a resistor or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.

LED Lamp




■ WATERPROOF CONNECTION

Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-185H to operate in dry/wet/damp or outdoor environment.

Suitable Current

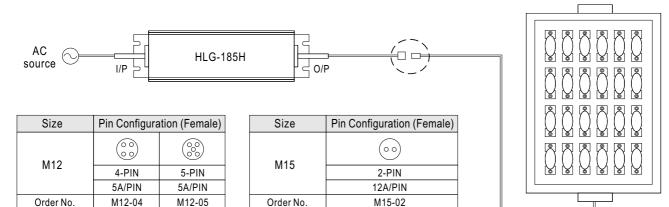


12A max

O Cable Joiner

Suitable Current

10A max

10A max.

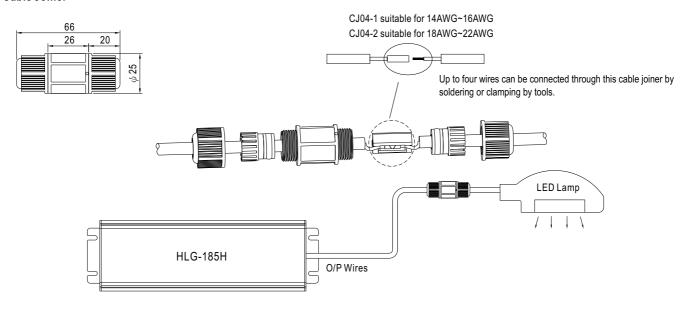

※CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No.: CJ04-1, CJ04-2.

