



■ Features :

- Wide input range 180~528VAC
- Built-in active PFC function
- High efficiency up to 91.5%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (0~10Vdc or 10V PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- Type "HL" for use in class I, Division 2 hazardous(Classified) location luminaires • Type "HL" for use in class 1, Division 2 index 5 years warranty (Note.9) IP65 IP67 C C Type HL US FC





HVG-150-12A

TAIWAN

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 0~10Vdc or 10V PWM signal or resistance.
- D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION

MODEL			HVG-150-12	HVG-150-15	HVG-150-20	HVG-150-24	HVG-150-30	HVG-150-36	HVG-150-42	HVG-150-48	HVG-150-54		
	DC VOLTAGE		12V	15V	20V	24V	30V	36V	42V	48V	54V		
	CONSTANT CURRENT	REGION Note.4	7.2~12V	8.25~15V	11~20V	13.2~24V	16.5~30V	19.8~36V	23.1~42V	26.4~48V	29.7~54V		
	RATED CURRENT		10A	10A	7.5A	6.25A	5A	4.17A	3.58A	3.13A	2.78A		
	RATED POWER		120W	150W	150W	150W	150W	150.12W	150.36W	150.24W	150.12W		
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p		
	VOLTAGE ADJ. RANGE Note.6		10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V		
OUTPUT	CURRENT ADJ. RANGE		Can be adjusted by internal potentiometer A type only										
			6 ~ 10A	5.5 ~ 10A	4.13 ~ 7.5A	3.44 ~ 6.25A	2.75 ~ 5A	2.29 ~ 4.17A	1.97 ~ 3.58A	1.72 ~ 3.13A	1.53 ~ 2.78A		
	VOLTAGE TOLERA	ANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%		
	LINE REGULATIO	N	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	LOAD REGULATION	ON	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	SETUP, RISE TIME	E	500ms, 80ms /2	230Vac 400ms	,80ms/347VAC/	180VAC at full lo	ad ; B type 500n	ns, 280ms/230V	ac 500ms,280n	ns/347VAC/480	/ac at 95% load		
	HOLD UP TIME (T	vp.)	18ms at full lo				, ,,	,	,				
	VOLTAGE RANGE		180 ~ 528VAC		; ~ 747VDC								
	FREQUENCY RAN		47 ~ 63Hz	201120									
	POWER FACTOR			/AC PF≥0 97/	277VAC PF≥0	95/347VAC PE	≥0 93/480VAC	at full load (Plea	ase refer to "Pow	er Factor Chara	cteristic" curve		
	T GWERT PROTOR	(136.)		-				,			otoriotio ourvo		
	TOTAL HARMONIC	DISTORTION	THD<20% when output loading ≥50% (≥60% only for 12V model) at 230VAC/277VAC/347VAC input THD<20% when output loading ≥75% at 480VAC input										
	EFFICIENCY (Typ.	١	87%	89%	90.5%	91%	91%	91%	91%	91.5%	91.5%		
INPUT	AC CURRENT	347VAC	0.45A	0.5A	90.5%	9170	31/0	31/0	31/0	31.370	31.370		
	(Typ.)												
		480VAC	0.35A 0.38A										
	MAX. No. of PSUs on 16A		COLD START 35A(twidth=790µs measured at 50% peak) at 480VAC 4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 480VAC										
	CIRCUIT BREAKER												
	LEAKAGE CURRE	ENT	<0.75mA / 480VAC										
	OVER CURRENT		95 ~ 108%										
			Protection type : Constant current limiting, recovers automatically after fault condition is removed Constant current limiting, recovers automatically after fault condition is removed										
PROTECTION	SHORT CIRCUIT			-									
	OVER VOLTAGE		14.4 ~ 16.8V 18 ~ 21V 23 ~ 27V 28 ~ 34V 34 ~ 38V 41 ~ 46V 47 ~ 53V 54 ~ 60V 59 ~ 65V										
	OTER TOEIXOE		Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery										
	OVER TEMPERAT	URE	Shut down o/p voltage, recovers automatically after temperature goes down										
	WORKING TEMP.		-40 ~ +70°C (Refer to "Derating Curve")										
	WORKING HUMID	ITY	20 ~ 95% RH non-condensing										
ENVIRONMENT	STORAGE TEMP.,	HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH										
	TEMP. COEFFICIE	NT	±0.03%/°C (0~60°C)										
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes										
	SAFETY STANDA	RDS Note.7	UL8750(type"	HL"), CSA C22	2.2 No. 250.0-0	8, IP65 or IP67	approved						
0.45577/.0	WITHSTAND VOLT	TAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC										
SAFETY &	ISOLATION RESIS	STANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH										
EMC	EMC EMISSION		Compliance to EN55015, EN61000-3-2 Class C (≥55% load, ≥60% load only for 12V model); EN61000-3-3, FCC part 15 class B										
EMC IMMUNITY			Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, light industry level (surge 4KV), criteria A										
	MTBF		-		K-217F (25°C)		, , , , , , , , , , , , , , , , , , , ,	, , ,					
OTHERS DIMENSION			245*68*38.8n		(
	PACKING		1.24Kg; 12pcs/15.9Kg/0.78CUFT										
NOTE	1. All parameters 2. Ripple & noise 3. Tolerance : inc 4. Please refer to 5. Derating may to 6. A type only. 7. Safety and EM 8. The power sup	are measure cludes set up "DRIVING No pe needed ur IC design refe	lly mentioned a ed at 20MHz o tolerance, line METHODS OF nder low input er to EN60598	are measured f bandwidth by regulation an LED MODUL voltages. Plea -1, CNS15233	at 347VAC inpy using a 12" to do load regulation E". see check the seeds, GB7000.1.	wisted pair-wir on. static character	e terminated v	vith a 0.1uf & 4	47uf parallel ca		ffected by the		


complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

10. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently


9. Refer to warranty statement.

connected to the mains.



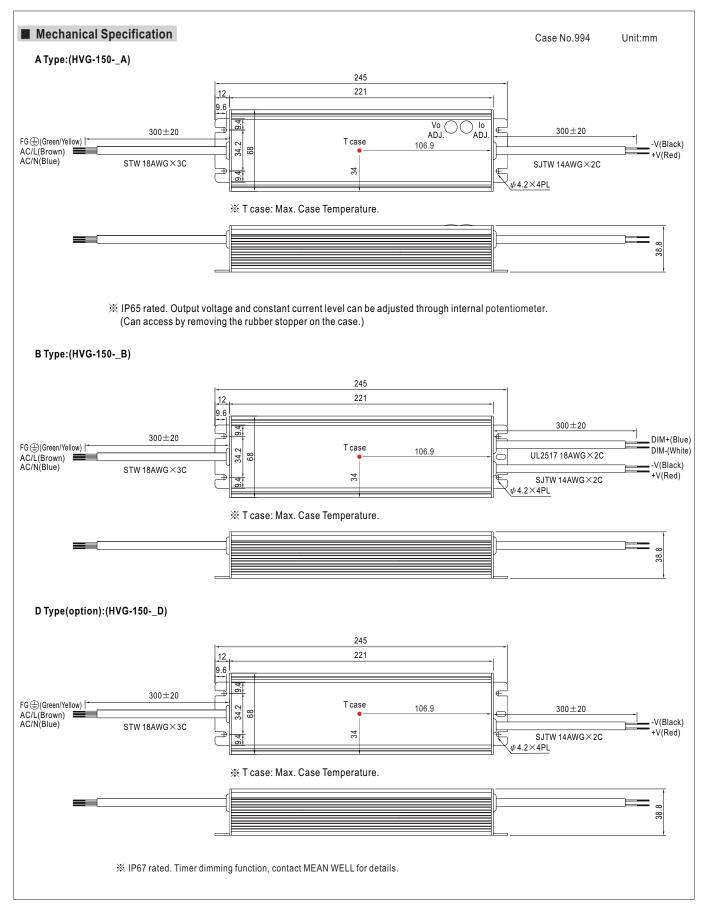




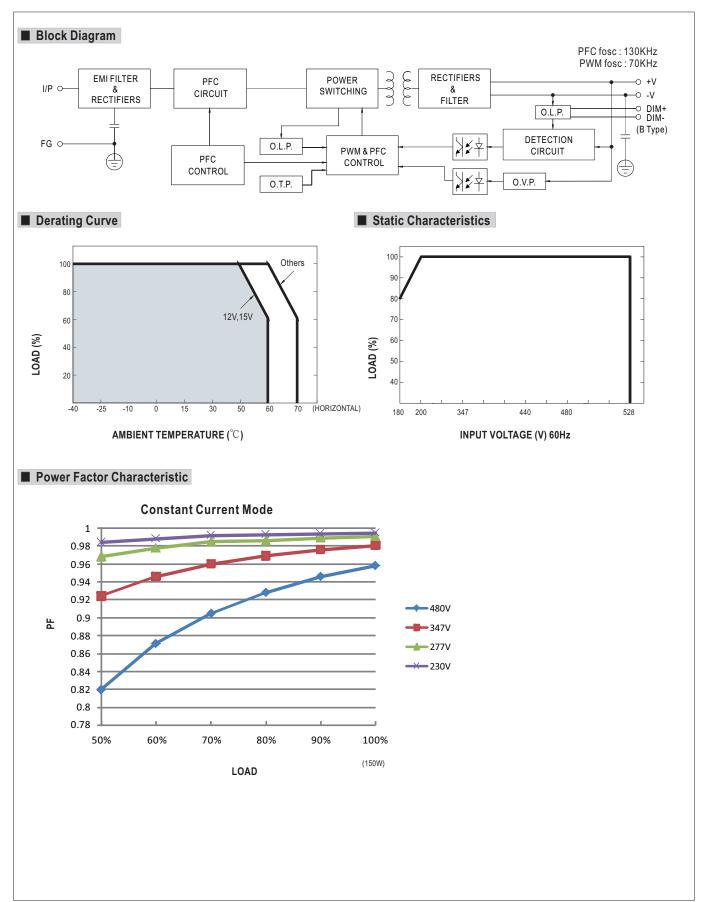



■ EFFICIENCY vs LOAD (48V Model)

HVG-150 series possess superior working efficiency that up to 91.5% can be reached in field applications.

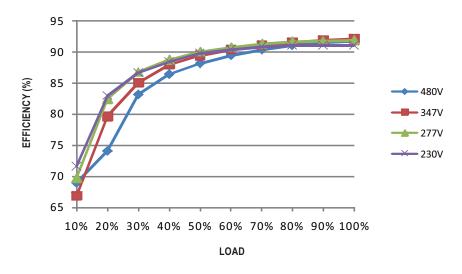


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

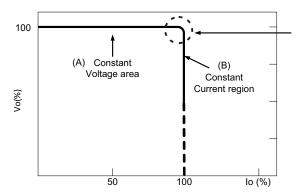


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION

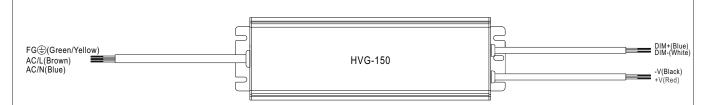

- Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 0 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- $\frak{\%}$ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	Short	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	$80 \mathrm{K}\Omega$	90K Ω	100K Ω	OPEN
value	Multiple drivers (N=driver quantity for synchronized dimming operation)	Short	10K Ω /N	20K Ω /N	30K Ω /N	40K Ω/N	50K Ω /N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω /N	
Percentage	e of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

Dimming value	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


¾ 10V PWM signal for output current adjustment (Typical): Frequency range:100Hz ~ 3KHz

Duty value	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

■ WATERPROOF CONNECTION


O Waterproof connector

Waterproof connector can be assembled on the output cable of HVG-150 to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)						
M12	00	000					
IVITZ	4-PIN	5-PIN					
	5A/PIN	5A/PIN					
Order No.	M12-04	M12-05					
Suitable Current	10A max.	10A max.					

Size	Pin Configuration (Female)					
M15	00					
IVITO	2-PIN					
	12A/PIN					
Order No.	M15-02					
Suitable Current	12A max.					





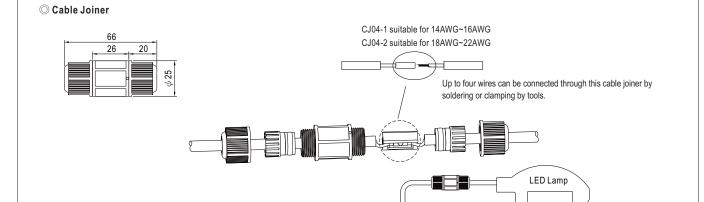

O/P Wires

※CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No. : CJ04-1, CJ04-2.

HVG-150

