



connected to the mains.

Features:


- Universal AC input / Full range
- Adjustable output voltage and current level
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- Built-in constant current limiting circuit
- Fully isolated plastic case with terminal block style of I/O
- Built-in active PFC function, comply with EN61000-3-2 class C (≥75% load)
- Class 2 power unit
- Pass LPS
- 100% full load burn-in test
- High reliability
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting

SELV LPS W (for 48V only) c Us (except for 48V) F A GOOD A

2 years warranty


MODEL		PLC-45-12	PLC-45-15	PLC-45-20	PLC-45-24	PLC-45-27	PLC-45-36	PLC-45-48
ОИТРИТ	DC VOLTAGE	12V	15V	20V	24V	27V	36V	48V
	CONSTANT CURRENT REGION Note.6	9 ~ 12V	11.25 ~15V	15 ~ 20V	18 ~24V	20.25 ~27V	27 ~ 36V	36 ~ 48V
	RATED CURRENT	3.8A	3A	2.3A	1.9A	1.7A	1.25A	0.95A
	CURRENT RANGE	0 ~ 3.8A	0 ~ 3A	0 ~ 2.3A	0 ~ 1.9A	0 ~ 1.7A	0 ~ 1.25A	0 ~ 0.95A
	RATED POWER	45.6W	45W	46W	45.6W	45.9W	45W	45.6W
	RIPPLE & NOISE (max.) Note.2	2Vp-p	2.4Vp-p	1.8Vp-p	2.7Vp-p	2.7Vp-p	3.6Vp-p	4.6Vp-p
	VOLTAGE ADJ. RANGE Note.5	· · ·	14.5 ~ 16.2V	19.5 ~ 22V	24 ~ 26V	25 ~ 30V	32.5 ~ 39V	43.6 ~ 51.8V
	CURRENT ADJ. RANGE Note.5	2.85 ~ 3.914A	2.25 ~ 3.1A	1.725 ~ 2.37A	1.425 ~1.957A	1.275 ~ 1.75A	0.938 ~ 1.288A	0.713 ~ 0.979
	VOLTAGE TOLERANCE Note.3							
	LINE REGULATION	±3.0%						
	LOAD REGULATION	±5.0%						
	SETUP TIME	500ms / 230VAC 1200ms / 115VAC at full load						
INPUT	VOLTAGE RANGE Note.4							
	FREQUENCY RANGE	47 ~ 63Hz						
	POWER FACTOR (Typ.)	PF>0.92/115VAC, PF>0.9/230VAC at full load (Please refer to "Power Factor Characteristic" curve)						
	TOTAL HARMONIC DISTORTION	THD< 20% when output loading≧75% at 115VAC/230VAC input						
	EFFICIENCY (Typ.)	83.5%	85%	86.5%	86.5%	86.5%	87.5%	87.5%
	AC CURRENT (Typ.)	0.55A/115VAC		33.370	00.070	00.070	0.1070	0.1070
	INRUSH CURRENT (Typ.)	COLD START 35A(twidth=50µs measured at 50% lpeak) at 230VAC						
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	42 units (circuit breaker of type B) / 42 units (circuit breaker of type C) at 230VAC						
	LEAKAGE CURRENT	<0.75mA/240VAC						
PROTECTION		95 ~ 110%						
	OVER CURRENT	Protection type: Constant current limiting, recovers automatically after fault condition is removed						
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.						
	OHORT GIROOTI	13.8 ~ 16V 17.5 ~ 21V 22.8 ~ 25V 28 ~ 32V 31 ~ 35V 41 ~ 46V 54 ~ 60V						
	OVER VOLTAGE					0. 00.	1	70. 001
	OVER TEMPERATURE	Protection type: Shut down o/p voltage, re-power on to recover Shut down o/p voltage, recovers automatically after temperature goes down						
ENVIRONMENT		-30 ~ +50°C (Refer to "Derating Curve")						
	WORKING TEMP.	20 ~ 95% RH non-condensing						
	WORKING HUMIDITY							
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH +0.03%/PC (0 ~ 50°C)						
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)						
	VIBRATION	10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes						
SAFETY & EMC	SAFETY STANDARDS	UL1310, TUV EN61347-1, EN61347-2-13, CAN/CSA C22.2 No. 223-M91(except for 48V), J61347-1, J61347-2-13 approved						
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC						
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH						
	EMC EMISSION	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≧75% load) ; EN61000-3-3						
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024,EN61547, light industry level, criteria A						
OTHERS	MTBF	515Khrs min. MIL-HDBK-217F (25°C)						
	DIMENSION	181.5*62*35mm (L*W*H)						
	PACKING	0.41Kg; 30pcs/13.3Kg/0.67CUFT						
NOTE	Ripple & noise are measure Tolerance: includes set up Derating may be needed ur Output voltage can be adjue Please refer to "DRIVING N The power supply is consider complete installation, the fir	acially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. sured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. up tolerance, line regulation and load regulation. d under low input voltage. Please check the static characteristics for more details. adjusted through the SVR1 on the PCB; limit of output constant current level can be adjusted through the SVR2 on the PCB. G METHODS OF LED MODULE". misidered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. Dis is suggested, but is not suitable for using additional drivers. If the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently						



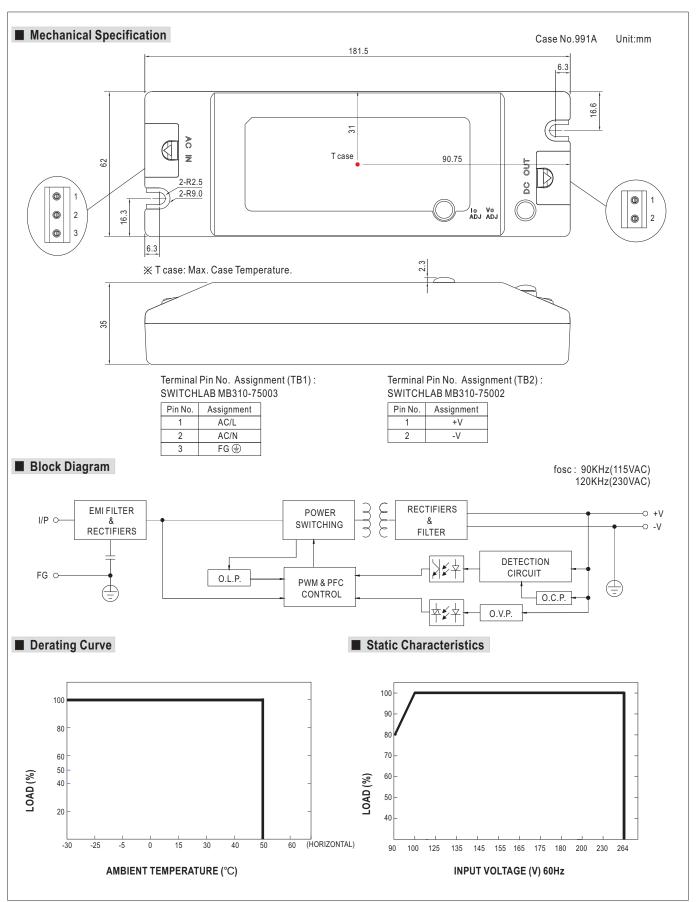




■ Power Factor Characteristic

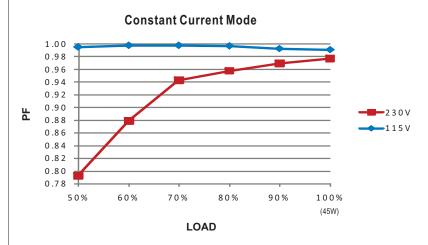


■ EFFICIENCY vs LOAD (48V Model)

PLC-45 series possess superior working efficiency that up to 87.5% can be reached in field applications.

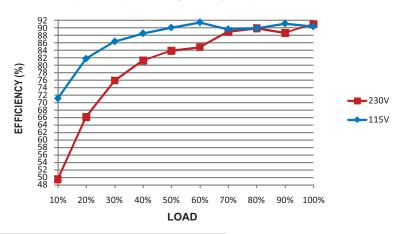

■ DRIVING METHODS OF LED MODULE

This LED power supply is suggested to work in constant current mode area (CC) to drive the LEDs.

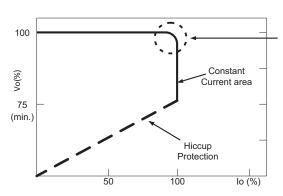

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mean Well:

PLC-45-12 PLC-45-15 PLC-45-20 PLC-45-24 PLC-45-27 PLC-45-36 PLC-45-48