

SPECIFICATION

MODEL



RT-85A

■ Features :

- Universal AC input / Full range
- Protections:Short circuit/Over load/Over voltage
- · Cooling by free air convection
- · LED indicator for power on
- 100% full load burn-in test
- All using 105^o long life electrolytic capacitors
- · Withstand 300VAC surge input for 5 second
- High operating temperature up to 70°C
- · Withstand 5G vibration test
- · High efficiency, long life and high reliability

RT-85C

· 3 years warranty

RT-85B





RT-85D

CBCE

OUTPUT NUMBER CH1 CH2 CH3 CH1 CH2 CH3 CH1 CH₂ CH3 CH1 CH2 CH3 DC VOLTAGE 5V 12V -5V 5V 12V -12V 5V 15V -15V 24V 12V RATED CURRENT 8A 3 5A 0.5A 84 3 5A 0.5A 7A 3A 0.5A 6A 2A 1A **CURRENT RANGE** Note.6 2 ~ 10A 0.3 ~ 4A 0 ~ 1A 2 ~ 10A 0.3 ~ 4A 0 ~ 1A 2 ~ 10A 0.3 ~ 4A 0 ~ 1A 2 ~ 10A 0.3 ~ 2.5A | 0.1 ~ 1A RATED POWER Note.6 84.5W 88W 87.5W 90W RIPPLE & NOISE (max.) Note.2 80mVp-p | 120mVp-p | 100mVp-p | 80mVp-p | 120mVp-p | 120mVp-p | 80mVp-p | 120mVp-p | 120mVp-80mVp-p | 150mVp-p | 120mVp-p OUTPUT **VOLTAGE ADJ. RANGE** CH1: 4.75 ~ 5.5V CH1: 4.75 ~ 5.5V CH1: 4.75 ~ 5.5V CH1: 4.75 ~ 5.5V **VOLTAGE TOLERANCE Note.3** ±2.0% ±5.0% ±6.0% +2 0% ±5.0% ±6.0% ±2.0% +3,-7% ±6.0% ±2.0% ±5.0% +6.0% LINE REGULATION ±0.5% ±1.0% ±1.0% ±0.5% ±1.0% ±1.0% ±0.5% ±1.0% ±1.0% ±0.5% ±1.0% ±1.0% Note.4 LOAD REGULATION ±3.0% ±6.0% ±1.0% ±3.0% ±6.0% ±3.0% ±6.0% ±1.0% ±3.0% ±6.0% Note 5 +1 0% +1 0% SETUP. RISE TIME 1200ms, 30ms/115VAC at full load 500ms 20ms/230VAC HOLD TIME (Typ.) 100ms/230VAC 18ms/115VAC at full load **VOLTAGE RANGE** 125 ~ 373VDC (Withstand 300VAC surge for 5sec. Without damage) 88 ~ 264VAC **FREQUENCY RANGE** 47 ~ 63Hz EFFICIENCY (Typ.) 76% 79% 76% 77% INPUT AC CURRENT (Typ.) 2 5A/115VAC 1.5A/230VAC INRUSH CURRENT (Typ.) COLD START 40A/230VAC LEAKAGE CURRENT <2mA / 240VAC 110 ~ 150% rated output power **OVER LOAD** Protection type: Hiccup mode, recovers automatically after fault condition is removed **PROTECTION OVER VOLTAGE** Protection type: Hiccup mode, recovers automatically after fault condition is removed WORKING TEMP. -25 ~ +70°C (Refer to output load derating curve) 20 ~ 90% RH non-condensing **WORKING HUMIDITY** ENVIRONMENT STORAGE TEMP., HUMIDITY -40 ~ +85°C, 10 ~ 95% RH TEMP. COEFFICIENT $\pm 0.03\%$ /°C (0 ~ 50°C)on +5V output **VIBRATION** 10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes SAFETY STANDARDS UL60950-1, TUV EN60950-1 Approved WITHSTAND VOLTAGE I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC SAFETY & ISOLATION RESISTANCE I/P-O/P. I/P-FG. O/P-FG:100M Ohms/500VDC **EMI CONDUCTION & RADIATION FMC** Compliance to EN55022 (CISPR22) Class B (Note 7) HARMONIC CURRENT Compliance to EN61000-3-2,-3 **EMS IMMUNITY** Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN61000-6-2 (EN50082-2) heavy industry level, criteria A MTBF 215Khrs min. MIL-HDBK-217F (25°C) **OTHERS DIMENSION** 159*97*38mm (L*W*H) 0.6Kg; 24pcs/15.4Kg/0.7CUFT 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.


NOTE

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Line regulation is measured from low line to high line at rated load.
- 5. Load regulation is measured from 20% to 100% rated load, and other output at 60% rated load.
- 6. Each output can work within current range. But total output power can't exceed rated output power.
- 7. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets
- 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.



■ Mechanical Specification

Case No. 901C Unit:mm

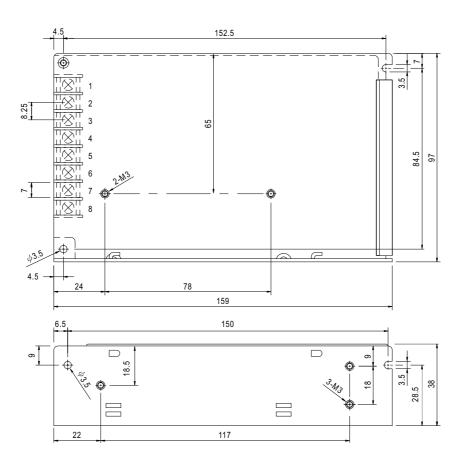

Terminal Pin. No Assignment

	Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment
	1	AC/L	4	NC	7	DC OUTPUT COM
	2	AC/N	5	DC OUTPUT V3	8	DC OUTPUT +V1
	3	FG ±	6	DC OUTPUT +V2		

■ Derating Curve

■ Static Characteristics

