





















Features

- 180 ~ 550Vac ultra wide input for 1-phase or 2-phase
- · 32mm slim width
- 4KVac I/O high isolation(Reinforced isolation)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- · Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- -30~+85°C ultra-wide operating temperature (>+60°C derating)
- Over voltage category Ⅲ
- · DC OK relay contact
- DC output voltage adjustable(+20%)
- 3 years warranty


Applications

- Industrial control system
- · Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus

Description

WDR-60 series is a 60W DIN rail power supply with ultra-wide AC input range. It is suitable to be mounted on TS-35/7.5 or TS-35/15 rails. Main features are as following: it can accept 180~550Vac ultra-wide input voltage range for single phase or 2-phase system, easy to install DIN rail type, narrow width (32mm) in slim design, -30~+85°C wide range operating temp, 4KVAC high isolation voltage, operation at 2000m altitude, adjustable output voltage (+20% max.), high efficiency, low ripple & noise, complete protections and so on. WDR-60 is compliant with EN-61000-6-2 standard regarding immunity for industrial environments. It suitable for industrial automation, surveillance, telecommunication and more applications.

Model Encoding







SPECIFICATION

	86.5% / 400Vac c 30A/230Vac	24V 2.5A 0 ~ 2.5A 60W 150mVp-p 24 ~ 29V ±1.0% ±0.5% ±0.5% 80Vac at full load	48V 1.25A 0 ~ 1.25A 60W 200mVp-p 48 ~ 57V ±1.0% ±0.5% ±0.5%	
0 ~ 10A 50W 00mVp-p 5 ~ 6V ± 2% ± 0.5% ± 1.5% 000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A/400Vac <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	0 ~ 5A 60W 120mVp-p 12 ~ 15V ±1.5% ±0.5% ±0.5% 2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	0 ~ 2.5A 60W 150mVp-p 24 ~ 29V ±1.0% ±0.5% ±0.5% 30Vac at full load	0~1.25A 60W 200mVp-p 48~57V ±1.0% ±0.5% ±0.5%	
00W 00mVp-p 5 ~ 6V ± 2% ± 0.5% ± 1.5% 000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A/400Vac <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	60W 120mVp-p 12 ~ 15V ±1.5% ±0.5% ±0.5% 2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	60W 150mVp-p 24 ~ 29V ±1.0% ±0.5% ±0.5% 30Vac at full load	60W 200mVp-p 48 ~ 57V ±1.0% ±0.5% ±0.5%	
00mVp-p 5 ~ 6V ±2% ±0.5% ±1.5% 000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 83.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A /400Vac 42mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	120mVp-p 12 ~ 15V ±1.5% ±0.5% ±0.5% 2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	150mVp-p 24 ~ 29V ±1.0% ±0.5% ±0.5%	200mVp-p 48 ~ 57V ±1.0% ±0.5% ±0.5%	
5 ~ 6V ±2% ±0.5% ±1.5% 000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A/400Vac <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	12~15V ±1.5% ±0.5% ±0.5% 2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	24 ~ 29V ±1.0% ±0.5% ±0.5% 30Vac at full load	48 ~ 57V ±1.0% ±0.5% ±0.5%	
5 ~ 6V ±2% ±0.5% ±1.5% 000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A/400Vac <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	12~15V ±1.5% ±0.5% ±0.5% 2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	24 ~ 29V ±1.0% ±0.5% ±0.5% 30Vac at full load	48 ~ 57V ±1.0% ±0.5% ±0.5%	
±2% ±0.5% ±1.5% 000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A/400Vac 3 <<2mA / 530Vac Hiccup mode when output yower	±1.5% ±0.5% ±0.5% 2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	±1.0% ±0.5% ±0.5% 30Vac at full load	±1.0% ±0.5% ±0.5%	
±0.5% ±1.5% 000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A /400Vac 22mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	±0.5% ±0.5% 2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	±0.5% ±0.5% 30Vac at full load	±0.5% ±0.5%	
±1.5% 000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A /400Vac 22mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	±0.5% 2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	±0.5%	±0.5%	
000ms, 70ms, 20ms/400Vac 80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A /400Vac section 5 ~ 135% rated output power Hiccup mode when output vo	2000ms, 70ms, 10ms/23 0Vdc 86.5% / 400Vac c 30A/230Vac	30Vac at full load		
80 ~ 550Vac or 254 ~ 78 47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A /400Vac : <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	0Vdc 86.5% / 400Vac c 30A/230Vac		90.5% / 400Vac	
47 ~ 63Hz 33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A /400Vac <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	86.5% / 400Vac c 30A/230Vac	89% / 400Vac	90.5% / 400Vac	
33.5% / 400Vac 0.4A/400Vac 0.7A/230Vac COLD START 50A /400Vac <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	c 330A/230Vac	89% / 400Vac	90.5% / 400Vac	
0.4A/400Vac 0.7A/230Vac COLD START 50A/400Vac 3 <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	c 330A/230Vac	89% / 400Vac	90.5% / 400Vac	
COLD START 50A /400Vac : <2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo	30A/230Vac			
<2mA / 530Vac 105 ~ 135% rated output power Hiccup mode when output vo				
105 ~ 135% rated output power Hiccup mode when output vo				
Hiccup mode when output vo				
	Hiccup mode when output voltage <50%, recovers automatically after fault condition is removed			
Constant current limiting within	150% ~100% rated outpu	ut voltage, recovers aut	comatically after fault condition is removed	
6.2 ~ 7.2V	16 ~ 18V	31 ~ 37V	58 ~ 60.5V	
Protection type : Shut down o/r	voltage, re-power on to recov	/er	<u>'</u>	
71	0 , 1			
• • • • •				
	J Odi VO /			
)min./1cycle, 60min. each alor	ng X, Y, Z axes; Mounting	g clip: Compliance to IEC60068-2-6	
2000 meters				
Ⅲ; According to EN61558, EN	50178, EN60664-1, EN62477	-1, EN60204-1; altitude	up to 2000 meters	
JL61010, EN61558-2-16, EAC	TP TC 004 approved; design	refer to GL and EN6020	04-1(By request)	
/P-O/P:4KVAC I/P-FG:2KVA	C O/P-FG:0.5KVAC O/P	-DC OK:0.5KVAC		
/P-O/P, I/P-FG, O/P-FG:100M	Ohms / 500VDC / 25°C / 70%	RH		
Parameter	Standard	Tes	t Level / Note	
Conducted	EN55032(CISPR32)	Cla	iss B	
Radiated	EN55032(CISPR32)	Cla	ass B	
Harmonic Current	,		ass A	
		Old	100 A	
<u> </u>				
		Ter	st Level /Note	
SD				
.טט	EN61000-4-2		evel 3, 8KV air; Level 2, 4KV contact, criteria A	
	ENICACOO 4 O		10 1011	
Radiated Susceptibility	EN61000-4-3		evel 3, 10V/m, criteria A	
FT Bursts	EN61000-4-4	Le	vel 3, 2KV/5KHz, criteria A	
FT Bursts Surge	EN61000-4-4 EN61000-4-5	Le Le	evel 3, 2KV/5KHz, criteria A evel 4, 2KV/Line-Line, 4KV/Line-Earth, criteria	
FT Bursts Surge Conducted	EN61000-4-4 EN61000-4-5 EN61000-4-6	Le Le Le	evel 3, 2KV/5KHz, criteria A evel 4, 2KV/Line-Line, 4KV/Line-Earth, criteria evel 3, 10V, criteria A	
FT Bursts Surge	EN61000-4-4 EN61000-4-5	Le Le Le	evel 3, 2KV/5KHz, criteria A evel 4, 2KV/Line-Line, 4KV/Line-Earth, criteria	
FT Bursts Surge Conducted	EN61000-4-4 EN61000-4-5 EN61000-4-6	Le Le Le Le	evel 3, 2KV/5KHz, criteria A evel 4, 2KV/Line-Line, 4KV/Line-Earth, criteria evel 3, 10V, criteria A	
FT Bursts Surge Conducted Magnetic Field /oltage Dips and interruptions	EN61000-4-4 EN61000-4-5 EN61000-4-6 EN61000-4-8	Le Le Le Le	evel 3, 2KV/5KHz, criteria A evel 4, 2KV/Line-Line, 4KV/Line-Earth, criteria evel 3, 10V, criteria A evel 4, 30A/m, criteria A e95% dip 0. 5 periods, 30% dip 25 periods,	
FT Bursts Surge Conducted Magnetic Field /oltage Dips and interruptions	EN61000-4-4 EN61000-4-5 EN61000-4-6 EN61000-4-8 EN61000-4-11	Le Le Le Le	evel 3, 2KV/5KHz, criteria A evel 4, 2KV/Line-Line, 4KV/Line-Earth, criteria evel 3, 10V, criteria A evel 4, 30A/m, criteria A e95% dip 0. 5 periods, 30% dip 25 periods,	
	rotection type: Shut down o/p rotection type: Shut down o/p relay contact rating(max.): 30' 30 ~ +85°C (Refer to "Derating 0 ~ 90% RH non-condensing 40 ~ +85°C E-0.03%/°C (0 ~ 60°C) component: 10 ~ 500Hz, 2G 10' 2000 meters III; According to EN61558, EN IL61010, EN61558-2-16, EAC P-O/P:4KVAC I/P-FG:2KVA P-O/P, I/P-FG, O/P-FG:100M arameter onducted adiated armonic Current oltage Flicker N55024, EN55035, EN61000 arameter	rotection type: Shut down o/p voltage, re-power on to recover rotection type: Shut down o/p voltage, re-power on to recove rotection type: Shut down o/p voltage, re-power on to recove rotection type: Shut down o/p voltage, re-power on to recove rotection type: Shut down o/p voltage, re-power on to recove rotection type: Shut down o/p voltage, re-power on to recove rotection type: Shut down of the residue of the residue of the residue of the rotection of the rot	rotection type: Shut down o/p voltage, re-power on to recover rotection type: Shut down o/p voltage, re-power on to recover lelay contact rating(max.): 30V / 1A resistive 30 ~ +85°C (Refer to "Derating Curve") 0 ~ 90% RH non-condensing 40 ~ +85°C E-0.03%/°C (0 ~ 60°C) component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting 2000 meters III; According to EN61558, EN50178, EN60664-1, EN62477-1, EN60204-1; altitude 1L61010, EN61558-2-16, EAC TP TC 004 approved; design refer to GL and EN6020 P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH arameter Standard Tes onducted EN55032(CISPR32) Cla adiated EN55032(CISPR32) Cla armonic Current EN61000-3-2 cla oltage Flicker EN61000-3-3 N55024, EN55035, EN61000-6-2, EN61204-3 arameter Standard Te	



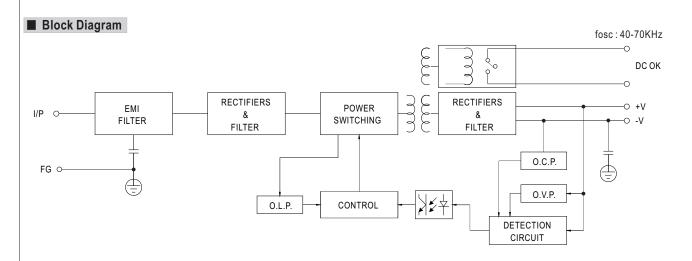


■ Derating Curve

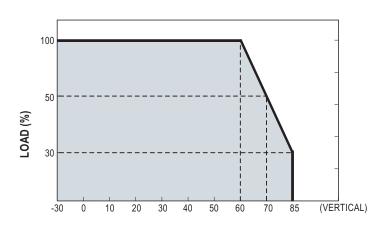

AMBIENT TEMPERATURE (°C)

■ Static Characteristics

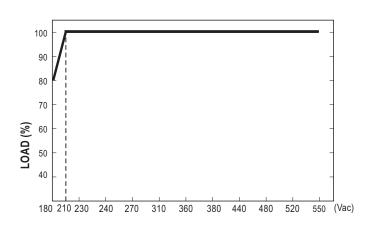

INPUT VOLTAGE (VAC) 60Hz

■ DC OK Relay Contact


Contact Close	PSU turns ON / DC OK.
Contact Open	PSU turns OFF / DC Fail.
Contact Ratings (max.)	30V/1A resistive load.




■ Mechanical Specification

Case No.221E


Unit:mm








Terminal Pin No. Assignment (TB2)

Pin No.	Assignment
1	DC output -V
2	DC output +V
3,4	Relay Contact










Terminal Pin No. Assignment (TB1)

Pin No.	Assignment
1	FG 🖶
2	L2
3	L1

■ Installation Instruction

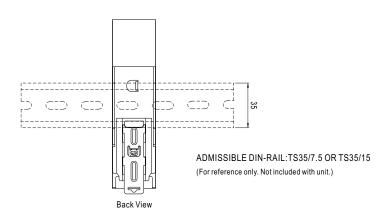

■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html