





#### Features

- · Constant Power mode output
- · Metal housing design with functional Ground
- Built-in active PFC function
- · Class 2 power unit
- No load / Standby power consumption < 0.5W</li>
- IP67 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer 3 in 1 dimming (dim-to-off)
- · Typical lifetime>50000 hours
- 5 years warranty


# Applications

- · LED street lighting
- LED architectural lighting
- LED bay lighting
- · LED floodlighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

# Description

XLG-50 series is a 50W AC/DC LED driver featuring the constant power mode output. XLG-50 operates from 100~305VAC. Thanks to the high efficiency up to 90%, with temperature under free the fanless design, the entire series is able to operate for  $-40\,^{\circ}\mathrm{C}$  ~  $+90\,^{\circ}\mathrm{C}$  case air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. XLG-50 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

# ■ Model Encoding



Type	IP Level	Function	Note
Α	IP67	lo adjustable through built in potentiometer.	In Stock
AB	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock

# 50W Constant Power Mode LED Driver

### **SPECIFICATION**


MODEL		XLG-50		
	RATED CURRENT	1A		
OUTPUT	CONSTANT CURRENT REGION Note.2	22~54V		
		100VAC ~ 305VAC		
	RATED POWER Note.5	50W		
	CURRENT RIPPLE	5.0% max. @rated current		
	OPEN CIRCUIT VOLTAGE (max.)			
	CURRENT ADJ. RANGE	0.53 ~ 2.1A		
	SETUP, RISE TIME Note.3	500ms, 100ms/115VAC, 230VAC		
INPUT	VOLTAGE RANGE Note.5	100 ~ 305VAC 142 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)		
	FREQUENCY RANGE	47 ~ 63Hz		
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)		
	TOTAL HARMONIC DISTORTION	THD< 10%(@load≧50%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)		
	EFFICIENCY (Typ.) Note.10	90%		
	AC CURRENT	0.57A / 115VAC		
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=350µs measured at 50% Ipeak) at 230VAC; Per NEMA 410		
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	5 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 230VAC		
	LEAKAGE CURRENT	<0.75mA / 277VAC		
	NO LOAD / STANDBY	No load power consumption <0.5W for A, <0.75W for I series		
	POWER CONSUMPTION	Standby power consumption <0.5W for AB		
PROTECTION	Over Power Protection	110-150% Over Power Protection, recovers automatically after fault condition is removed		
	Short Circuit Protection	Constant current limiting, recovers automatically after fault condition is removed		
	Over Temperature Protection	Hiccup mode, recovers automatically after fault condition is removed		
		320 ~ 370VAC (Shut down output voltage when the input voltage exceeds protection voltage)		
	INPUT OVER VOLTAGE Note.8	can survive input voltage stress of 440Vac for 48 hours		
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)		
	MAX. CASE TEMP.	Tcase=+90°C		
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-40~+80°C, 10~95% RH		
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)		
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes		
	SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC AS/NZS IEC EN61347-1, AS/NZS EN61347-2-13 independent, EN62384 IP65 or IP67; GB19510.1, GB19510.14 approved		
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.5KVAC		
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH		
EMC	EMC EMISSION	Compliance to EN55015,EN61000-3-2 Class C (@load ≥50%); EN61000-3-3; GB17743, GB17625.1		
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level (surge immunity Line-Earth 6KV, Line-Line 4KV)		
OTHERS	MTBF	1252.69K hrs min. Telcordia SR-332 (Bellcore) 394.57 Khrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	105*63*30mm (L*W*H)		
		0.41Kg;24pcs/ 10.5Kg/0.68CUFT for A-type		
NOTE	PACKING    0.41Kg;24pcs/ 10.5Kg/0.68CUFT for A-type   0.42Kg;24pcs/ 11Kg/0.68CUFT for AB-type			

- 6. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to) point (or TMP, per DLC), is about 70°C or less. 7. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a>
- 8. Only for XLG-50 I series
- 9. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft) 10.Only for XLG-50-A
- 11. For any application note and IP water proof function installation caution, please refer our user manual before using. <a href="https://www.meanwell.com/Upload/PDF/LED">https://www.meanwell.com/Upload/PDF/LED</a> EN.pdf




# ■ Block Diagram

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

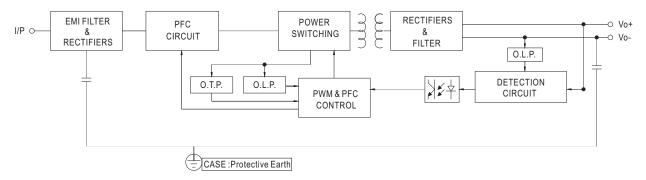

# ■ DRIVING METHODS OF LED MODULE

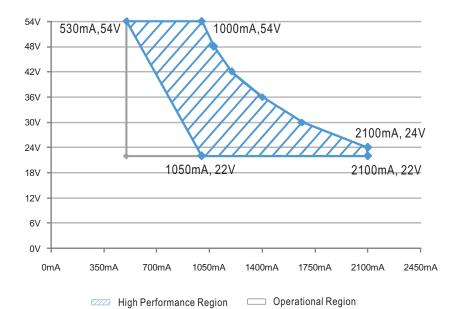




### **■ DIMMING OPERATION**




#### $\frac{1}{2}$ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)




"DO NOT connect "DIM- to Vo-"

Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to Vo-"


Applying additive resistance:



"DO NOT connect "DIM- to Vo-"









Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.




# ■ OUTPUT LOAD vs TEMPERATURE

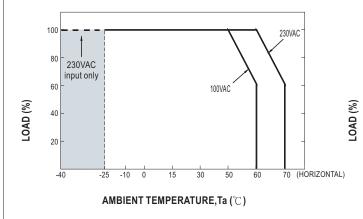




### ■ STATIC CHARACTERISTIC




\* De-rating is needed under low input voltage.

### **■ POWER FACTOR (PF) CHARACTERISTIC**



# ■ TOTAL HARMONIC DISTORTION (THD)


¾ 50V Model, Tcase at 75°C



# ■ EFFICIENCY vs LOAD

 $\rm XLG\text{-}50$  series possess superior working efficiency that up to 90% can be reached in field applications.


ℜ 50V Model, Tcase at 75 $\textdegree$ 




LOAD





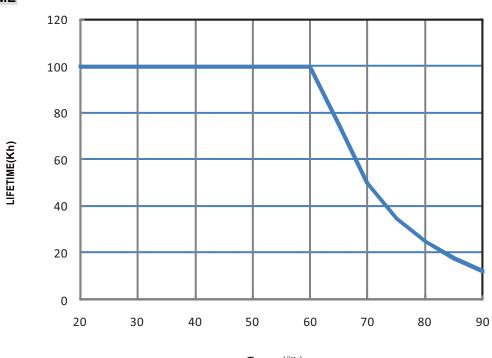





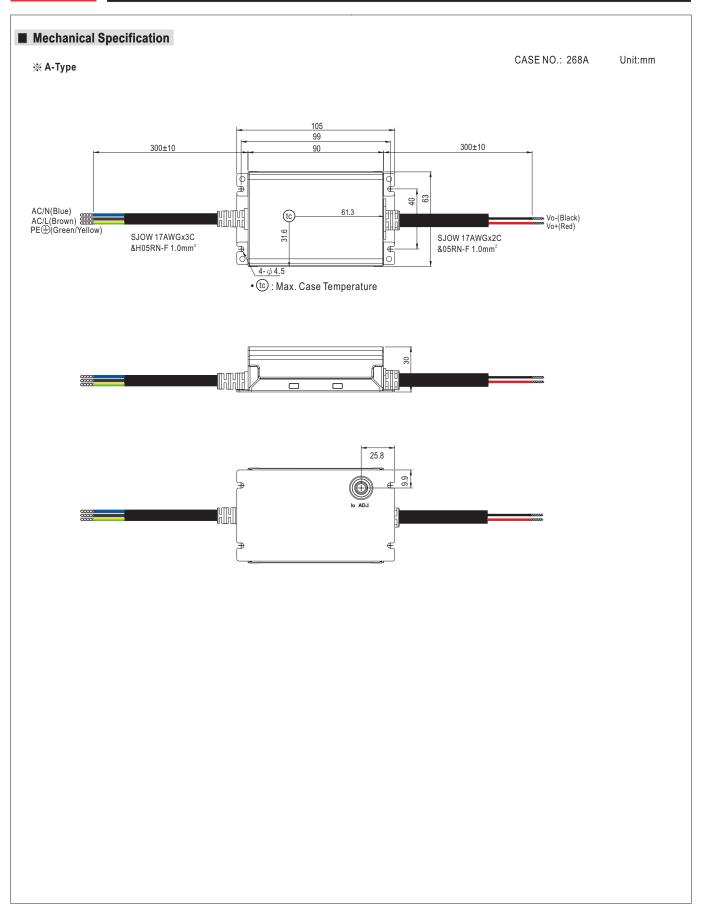



### ※ AB-Type

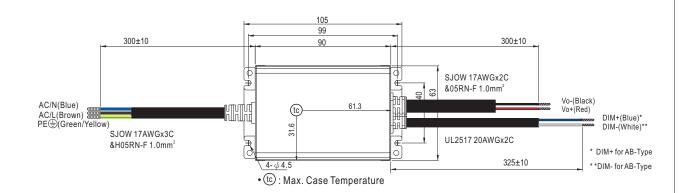

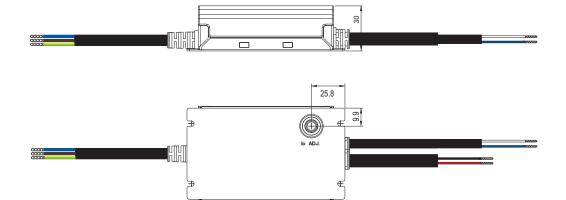

### ■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html