

D1RFRD006


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES:

- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
- 2.PITCH: 5.0MM ,POLES: 02-24P
- 3.RATED VOLTAGE/CURRENT: UL1059 300V/15A
IEC 320V/20A
- 4.OPERATION TEMPERATURES: -40℃~+105℃
- 5.RATED IMPULSE VOLTAGE: 4.0KV
- 6.INSULATION RESISTANCE: 5000MΩ/DC1000V
- 7.WIRE RANGE: 22~14AWG,0.2-2.5MM²
- 8.UNDIMENSIONED TOLERANCES:

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	TO	TO	OVER	OVER	OVER	
6	6	10	30	30	60	100	○
10	10	24	30	60	100	150	◇
±0.10			±0.15	±0.25	±0.20	±0.30	±0.50
						±0.70	±1.00
						0.05	0.10

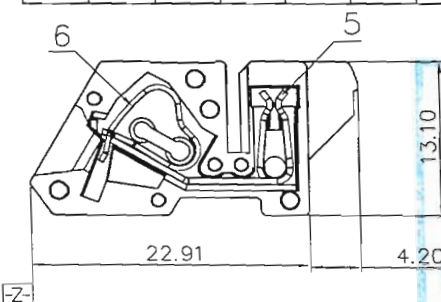

6	8EDG-STD-5.0-SPRING	X000005170(H)	XX	STAINLESS STEEL	
5	8EDG-STD-5.0 CLAMP	1380B00010(H)	XX	COPPER	TIN PLATED
4	8EDG-STDM-5.0 COVER2	1381C4101C(H)	1	PA66	UL94V-0
3	8EDG-STDM-5.0 COVER1	1381C4101A(H)	1	PA66	UL94V-0
2	8EDG-STDB-5.0 HOUSING	1382A4101A(H)	2,(XX=3) 1,(XX=2)	PA66	UL94V-0
1	8EDG-STD-5.0 HOUSING	1380A4101A(H)	X=2,(XX=4) 1,(XX=2,3)	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	MATERIAL:	DEGSON® 宁波高正电子有限公司			
	TOLERANCES EXCEPT AS NOTED	FINISH:	DEGSON ELECTRONICS CO., LTD			
	.X ± .XX ± .XXX ±	PART NO.:	NAME:			
	.X" ± .XX" ± .XXX" ±	APPD: <i>Team 09/30/14</i>	8EDG-STDBM-5.0-XXP-11-01A(H)			
THIRD ANGLE PROJECTION	ANGLES ± 1°	CHKD: <i>Aaron 11/24/14</i>	TITLE: ASSEMBLY DRAWING			
		DRFT: GYZ 08/14/14	DRAWING NO.: 8EDG-STDBM-5.0-E01			
DO NOT SCALE DRAWING			SCALE	N/A	SHEET	1/1

