





DEGSON ELECTRONICS CO., LTD.




Product Specification

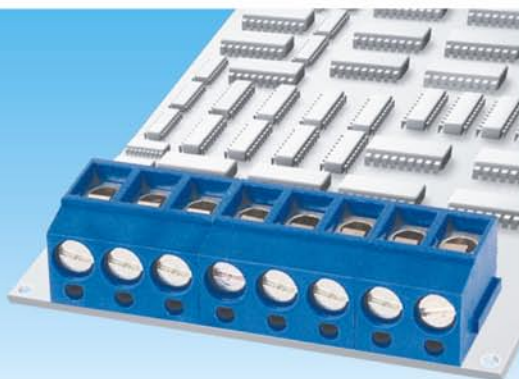

DG300R-5.0
DG300R-7.5

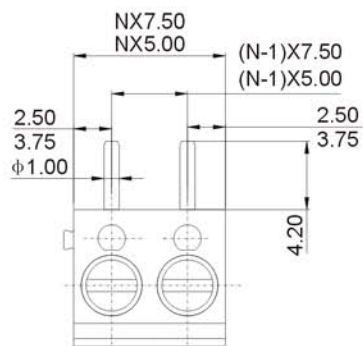

PCB LAYOUT



Material

Screws	:	M3 steel Zinc plated
Wire guard:		Stainless steel
Pin header:		Brass, Tin plated
Housing	:	PBT, UL94V-0

Electrical

Rated voltage	:	300V
Rated current	:	10A
Contact resistance	:	20mΩ
Insulation resistance	:	5000MΩ /DC1000V
Withstanding voltage:		AC2000V/1Min
Wire range	:	22-14AWG 2.5mm ²

Mechanical

Temp. Range	:	-30°C~+120°C
Torque	:	0.5Nm(4.5lb.in)
Strip length	:	4.5-5mm

HOW TO ORDER:

- P - 1 -

X	X	X
Customer Request		

Series No.

No of Pole

Color

1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



DEGSON ELECTRONICS CO., LTD.

NAME

DG300R-5.0
DG300R-7.5