



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

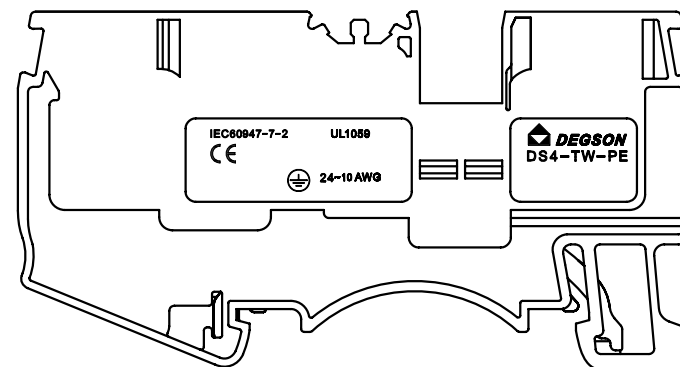

DS4-TW-PE - 01P - 1C - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color):C.(Green-yellow)
(RoHS)
00A-(Standard)

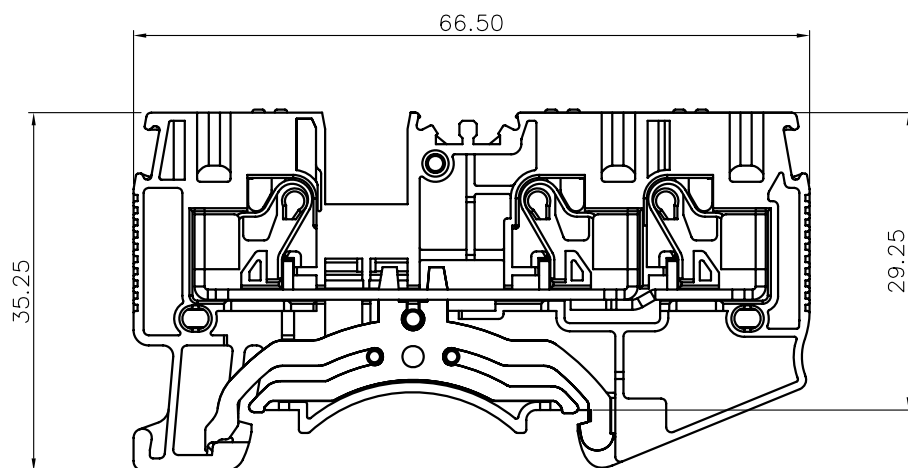

NOTES1:

UL Standard

1.Wire Range : 24~10AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	/
Rate Current(A)	/

2.Wire Range : 0.2~4mm²

NOTES2:

1.Dimension shall be interpreted per

ASME Y14.5-2009

2.Pitch : 6.2mm, Poles : 01P

3.Stripping length : 10~12mm

4.Operating temperature:-40°C~+105°C

5.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
	Over	Over		Over	Over	Over	Over		
TO	6	10	TO	30	60	100	150	0.1/10	
6	10	24	30	60	100	150		<	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

6.RoHS Compliance

DETACHED LISTS	PART NO.:	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DS4-TW-PE-01P-1C-00A(H)			
	CHKD:				
	DRFT:	TITLE: CUSTOMER DRAWING		REV	DO
	THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1