


<b>Nominal Voltage:</b>	1.5 V
<b>Operating Voltage</b>	1.6 - 0.75V
<b>Impedance:</b>	250 m-ohm @ 1kHz
<b>Typical Weight:</b>	11 gm (0.4 oz.)
<b>Typical Volume:</b>	3.5 cm <sup>3</sup> (0.2 in. <sup>3</sup> )
<b>Terminals:</b>	Flat
<b>Storage Temperature Range:</b>	-20 <sup>o</sup> C to 35 <sup>o</sup> C
<b>Operating Temperature Range:</b>	-20 <sup>o</sup> C to 54 <sup>o</sup> C (-4 <sup>o</sup> F to 130 <sup>o</sup> F)
<b>ANSI:</b>	24A
<b>IEC:</b>	LR03

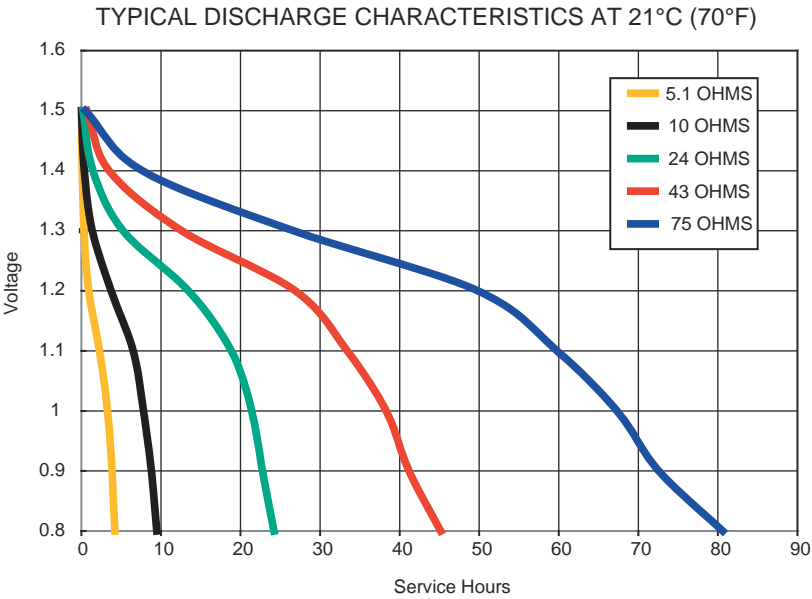


**DURACELL®**  
BATTERIES


Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


TYPICAL CONSTANT CURRENT DISCHARGE CHARACTERISTICS AT 21°C (70°F)

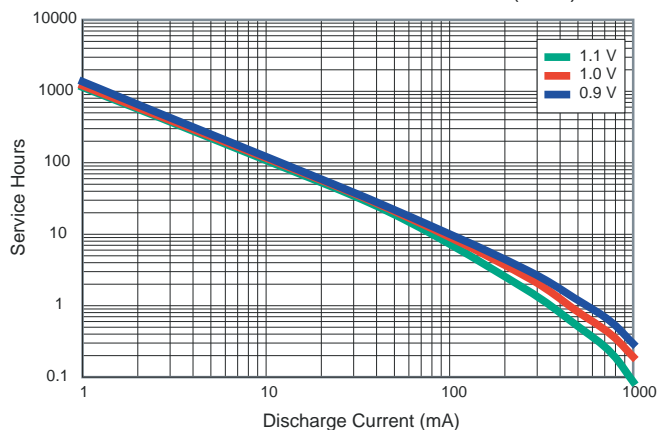


TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

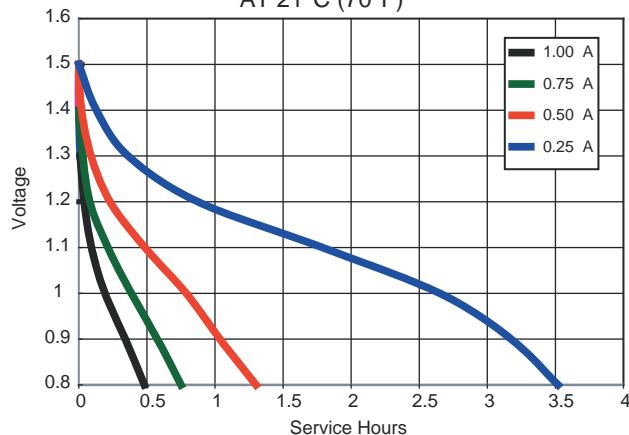


TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

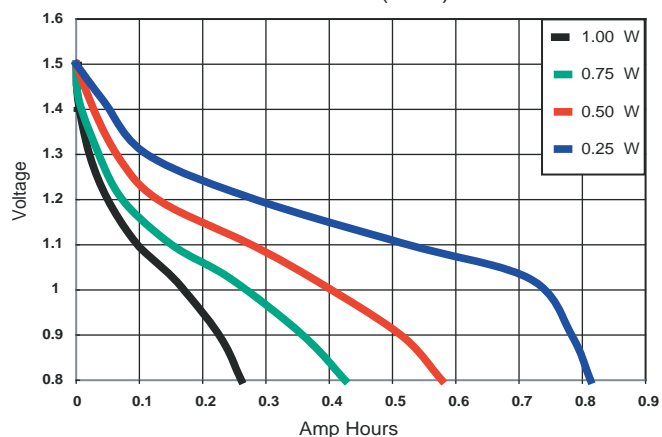

TYPICAL DISCHARGE PERFORMANCE AT 21°C (70°F)

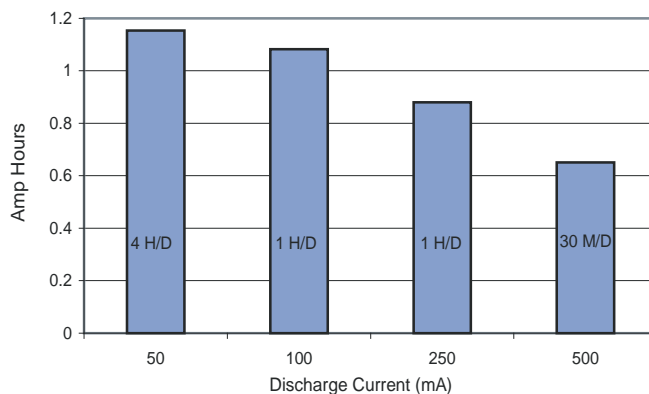

TYPICAL DC RESISTANCE CHARACTERISTICS AT 21°C (70°F)

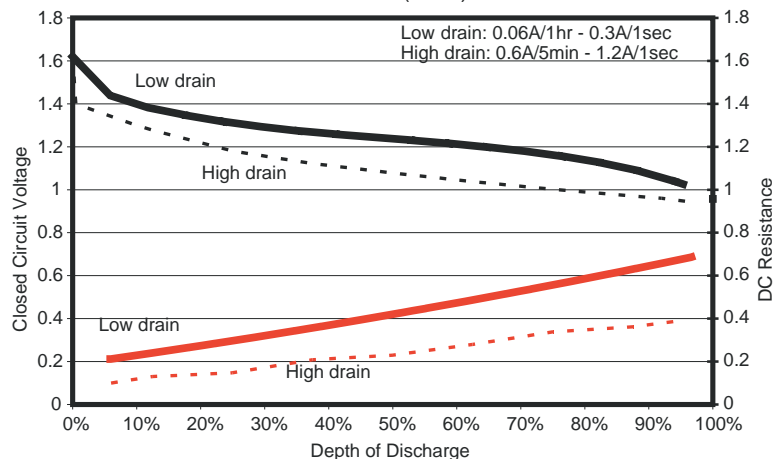

**DURACELL®**  
BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.